




AFRICA COLLECTION







AFRICA DESIGN



← 55 inch. simulation 140cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 5 inches - 11.7 cm
REPEAT WARP REPETICIÓN URDIMBRE: 5 inches - 12.8 cm



AFRICA 02



AFRICA 04



AFRICA 90



AFRICA 95

AROA DESIGN




← 55 inch. simulation 140cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.4 cm
REPEAT WARP REPETICIÓN URDIMBRE: 18 inches - 45.8 cm




AROA 02

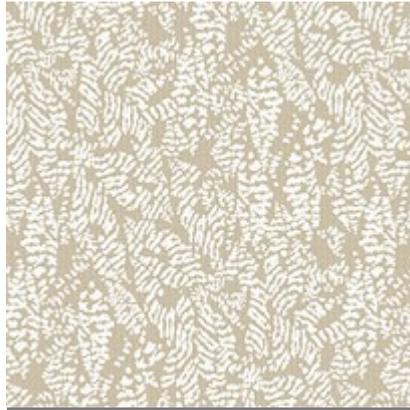

AROA 04




AROA 90

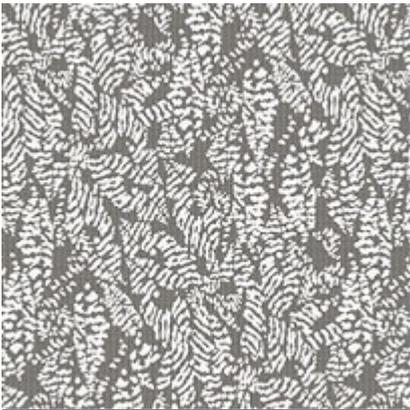

AROA 95

BENI DESIGN

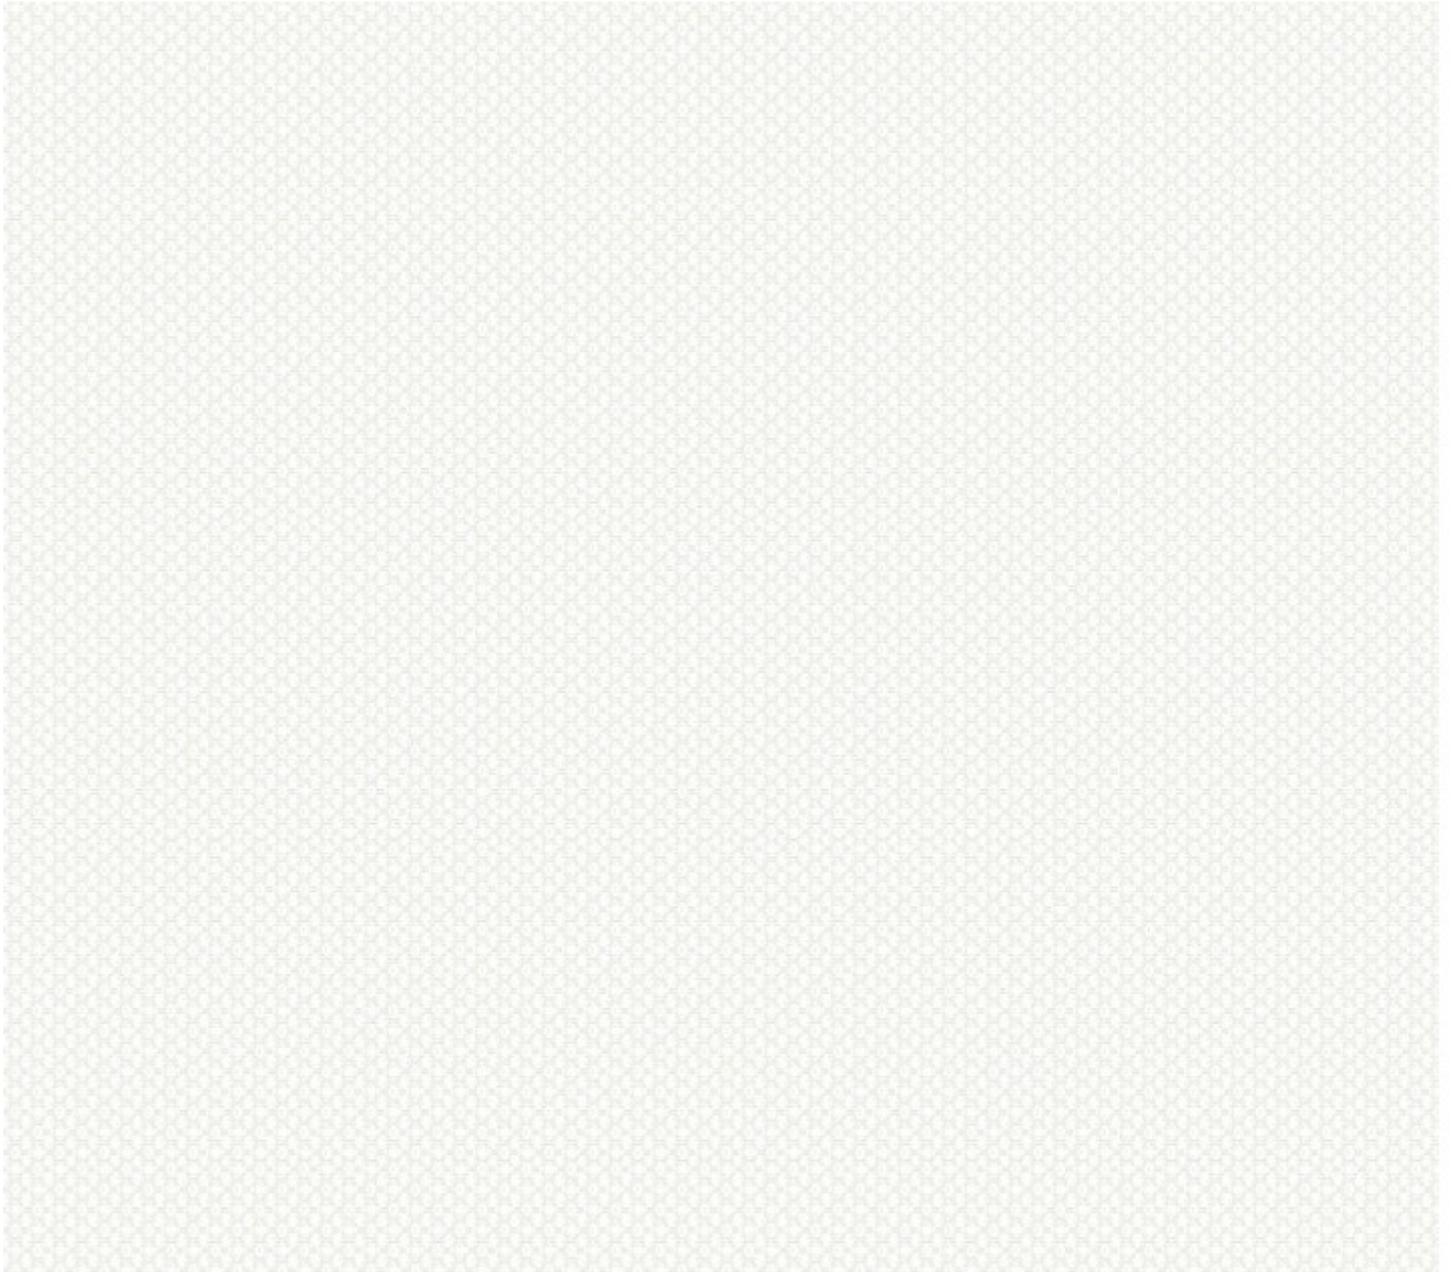


← 55 inch. simulation 140cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: 0 inches - 0.3 cm
REPEAT WARP REPETICIÓN URDIMBRE: 0 inches - 0.3 cm




BENI 02

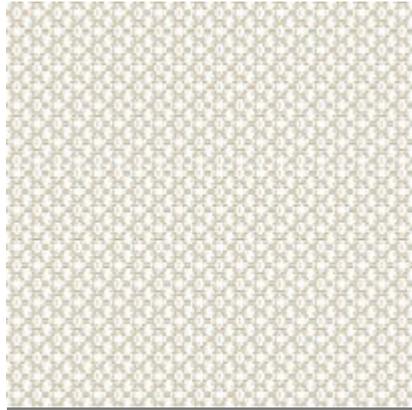

BENI 04

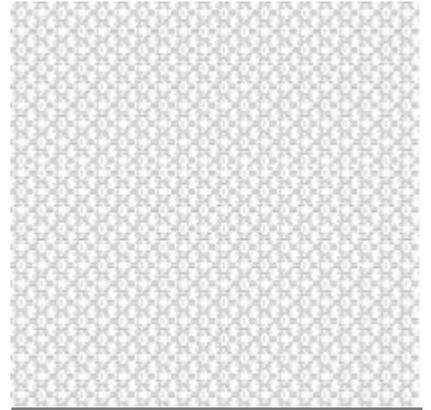

BENI 90

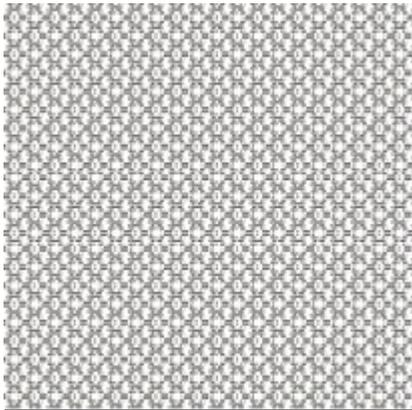



BENI 95

WAITA DESIGN




← 55 inch. simulation 140cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 19 inches - 48.7 cm

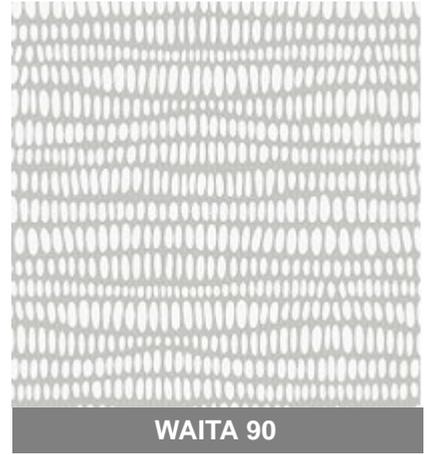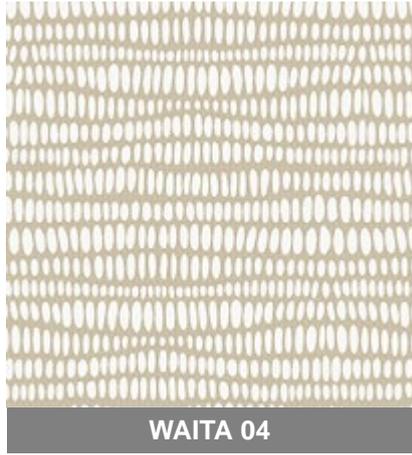

WAMBA DESIGN

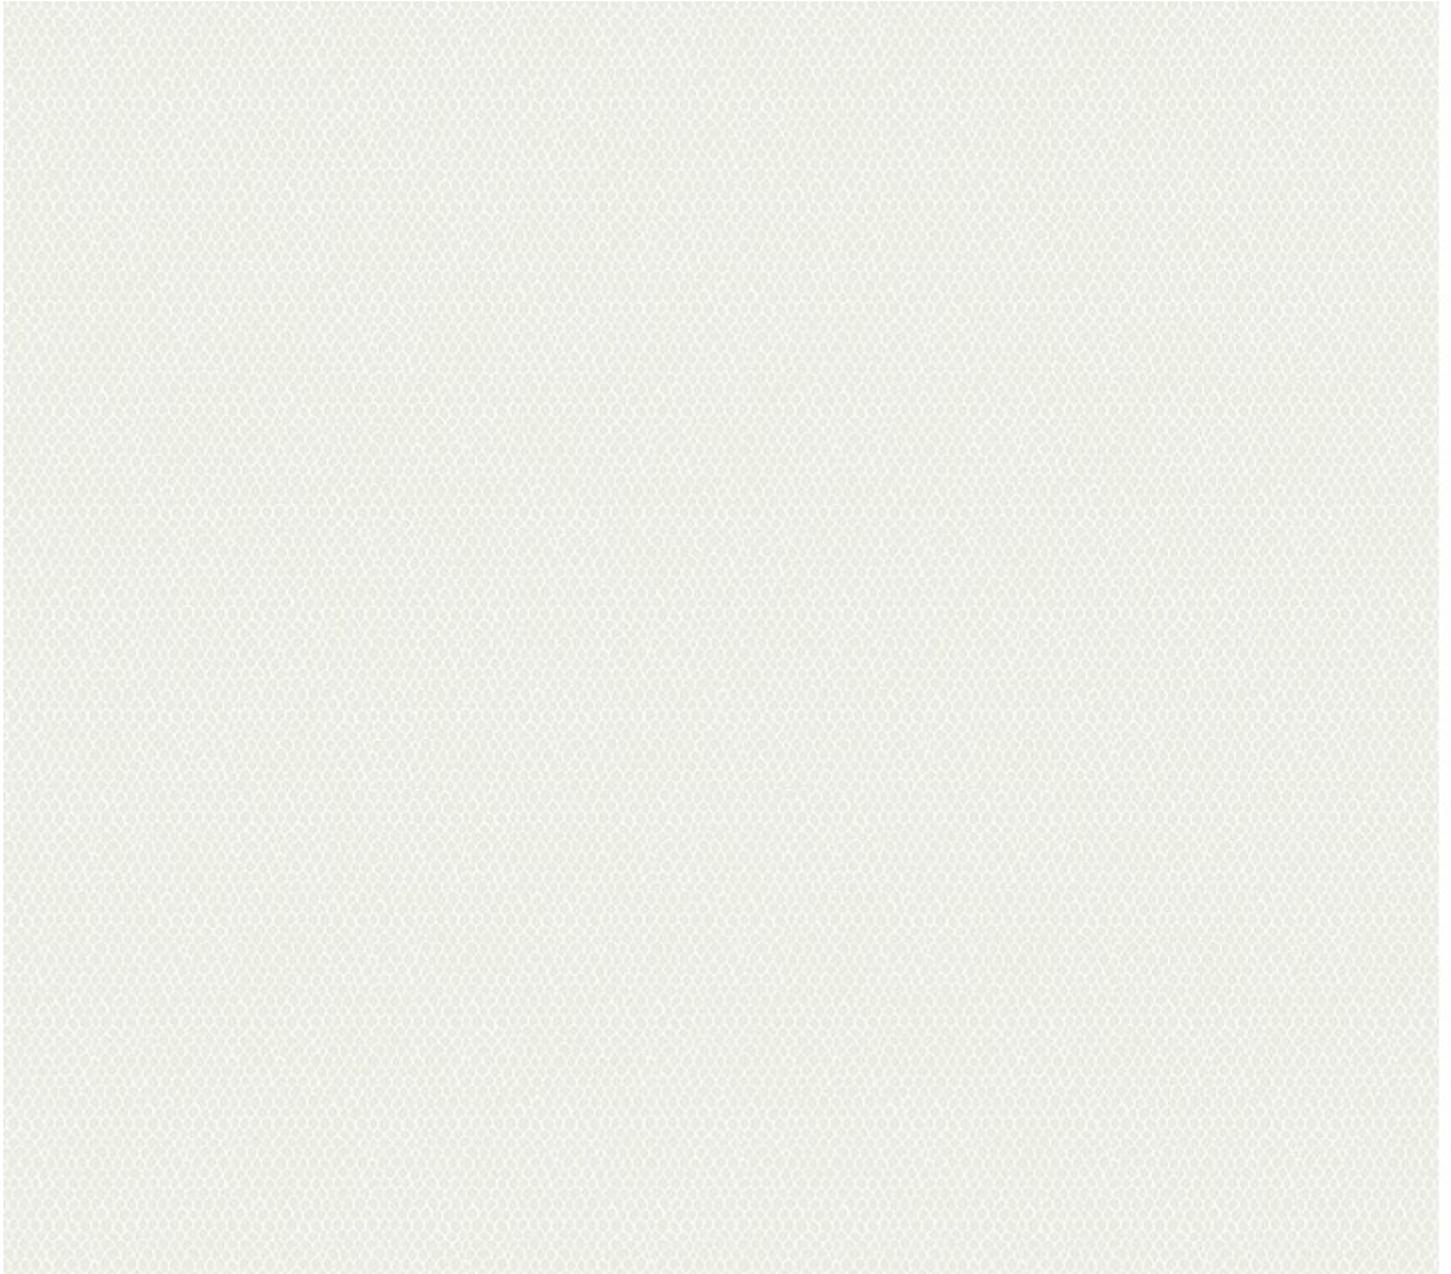

← 55 inch. simulation 140cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 17.6 cm
REPEAT WARP REPETICIÓN URDIMBRE: 7 inches - 19 cm




WAMBA 02



WAMBA 04

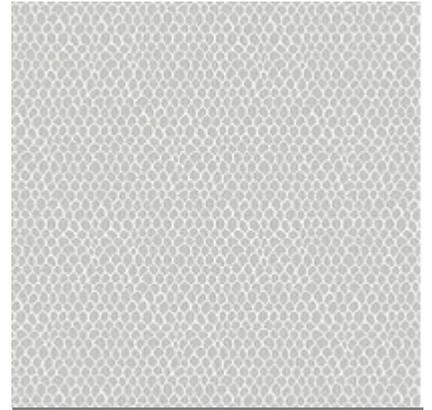

WAMBA 90

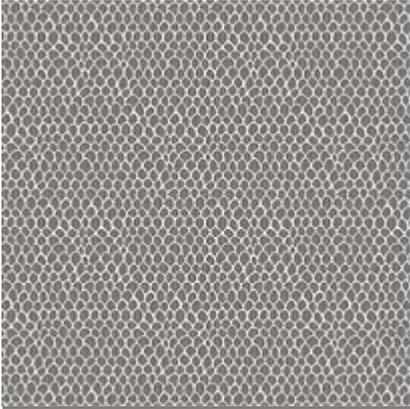

WAMBA 95

YUBA DESIGN




← 55 inch. simulation 140cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: 1 inches - 2.8 cm
REPEAT WARP REPETICIÓN URDIMBRE: 1 inches - 2.8 cm




YUBA 02

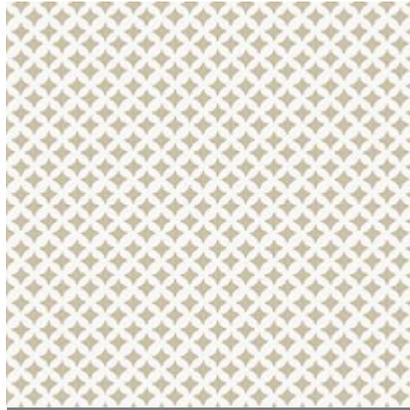

YUBA 04

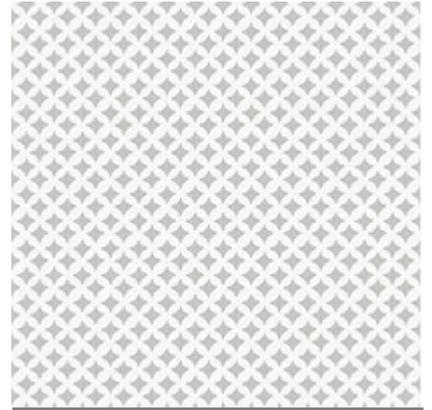

YUBA 90

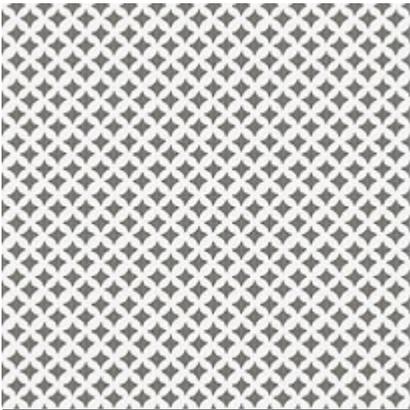

YUBA 95

AFRICA COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
HS CODE / PARTIDA ARANCELARIA	54078300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES50% PAN25% CO25%	
WEIGHT (oz/lyd2) / PESO (gr/m2) (+5%)	8.09 / 275	
WEIGHT (oz/lyd) / PESO (gr/ml)	24.83 / 770.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	15000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	4-5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1.8	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1071.2	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	1327.5	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	84.95	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	46.8	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	79.2	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	74.3	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2.4	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2.2	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | www.comersanfabrics.com (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.