




BETA COLLECTION







BETA DESIGN

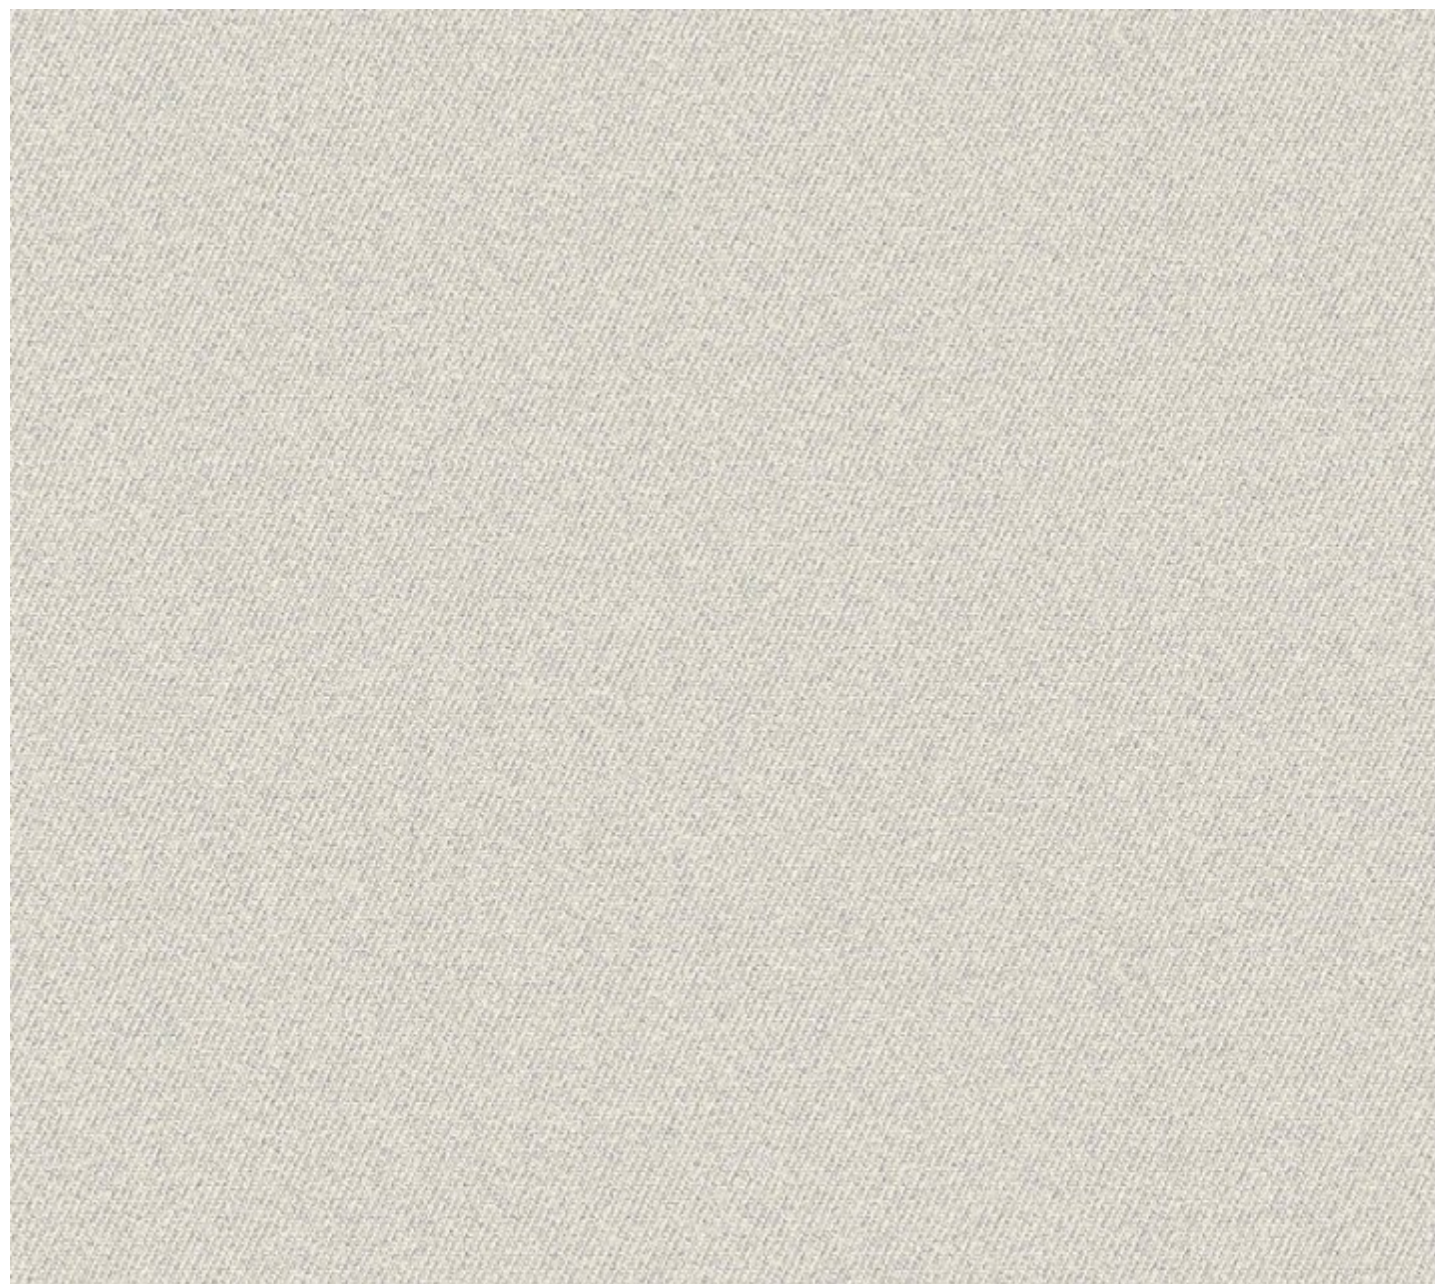

← 55 inch. simulation 140 cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:




BETA 03



BETA 06

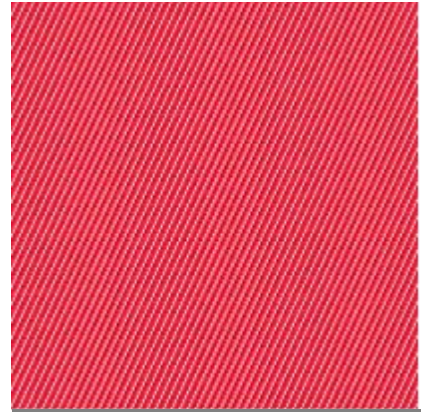


BETA 15

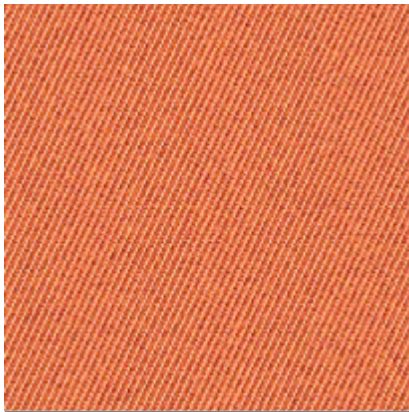

BETA 35




BETA 42

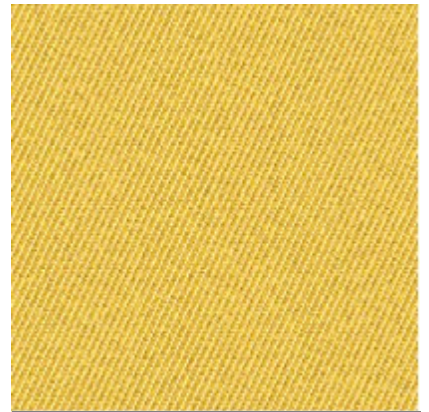


BETA 45



BETA 50

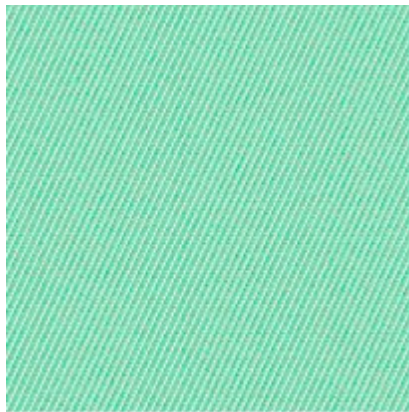

BETA 54

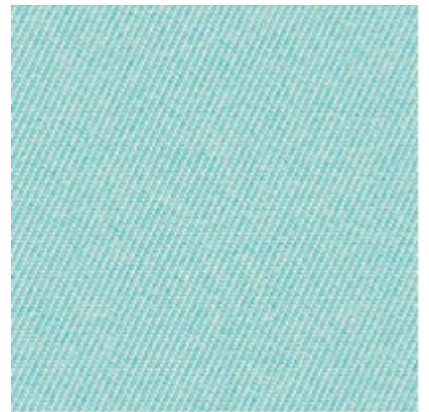


BETA 62




BETA 67




BETA 72

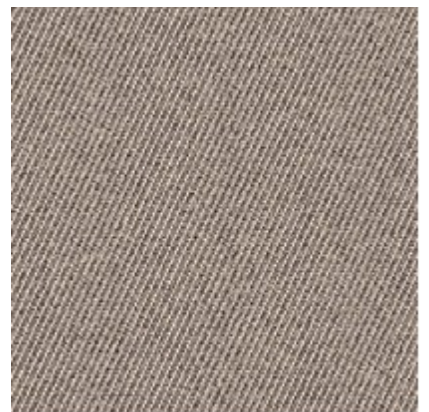

BETA 82

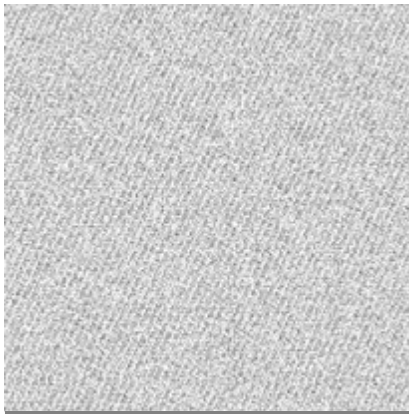

BETA 95

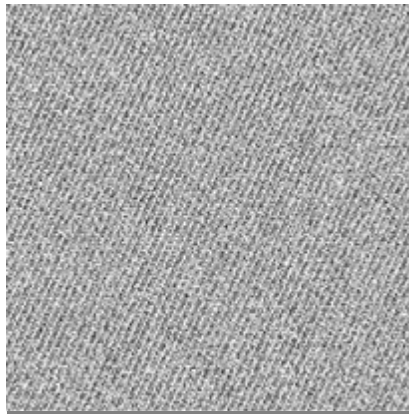

BETA 97



BETA LIN



BETA NAT

BETA COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	54075300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	9.24 / 314	
WEIGHT (oz/yd) / PESO (gr/ml)	28.35 / 879.20	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	46000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	4-5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	4-5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	0.6	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.2	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	561	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	601	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	35.30	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	38.8	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	84.3	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	102.7	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	0.45	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.