




BONDADE COLLECTION







ADUA DESIGN

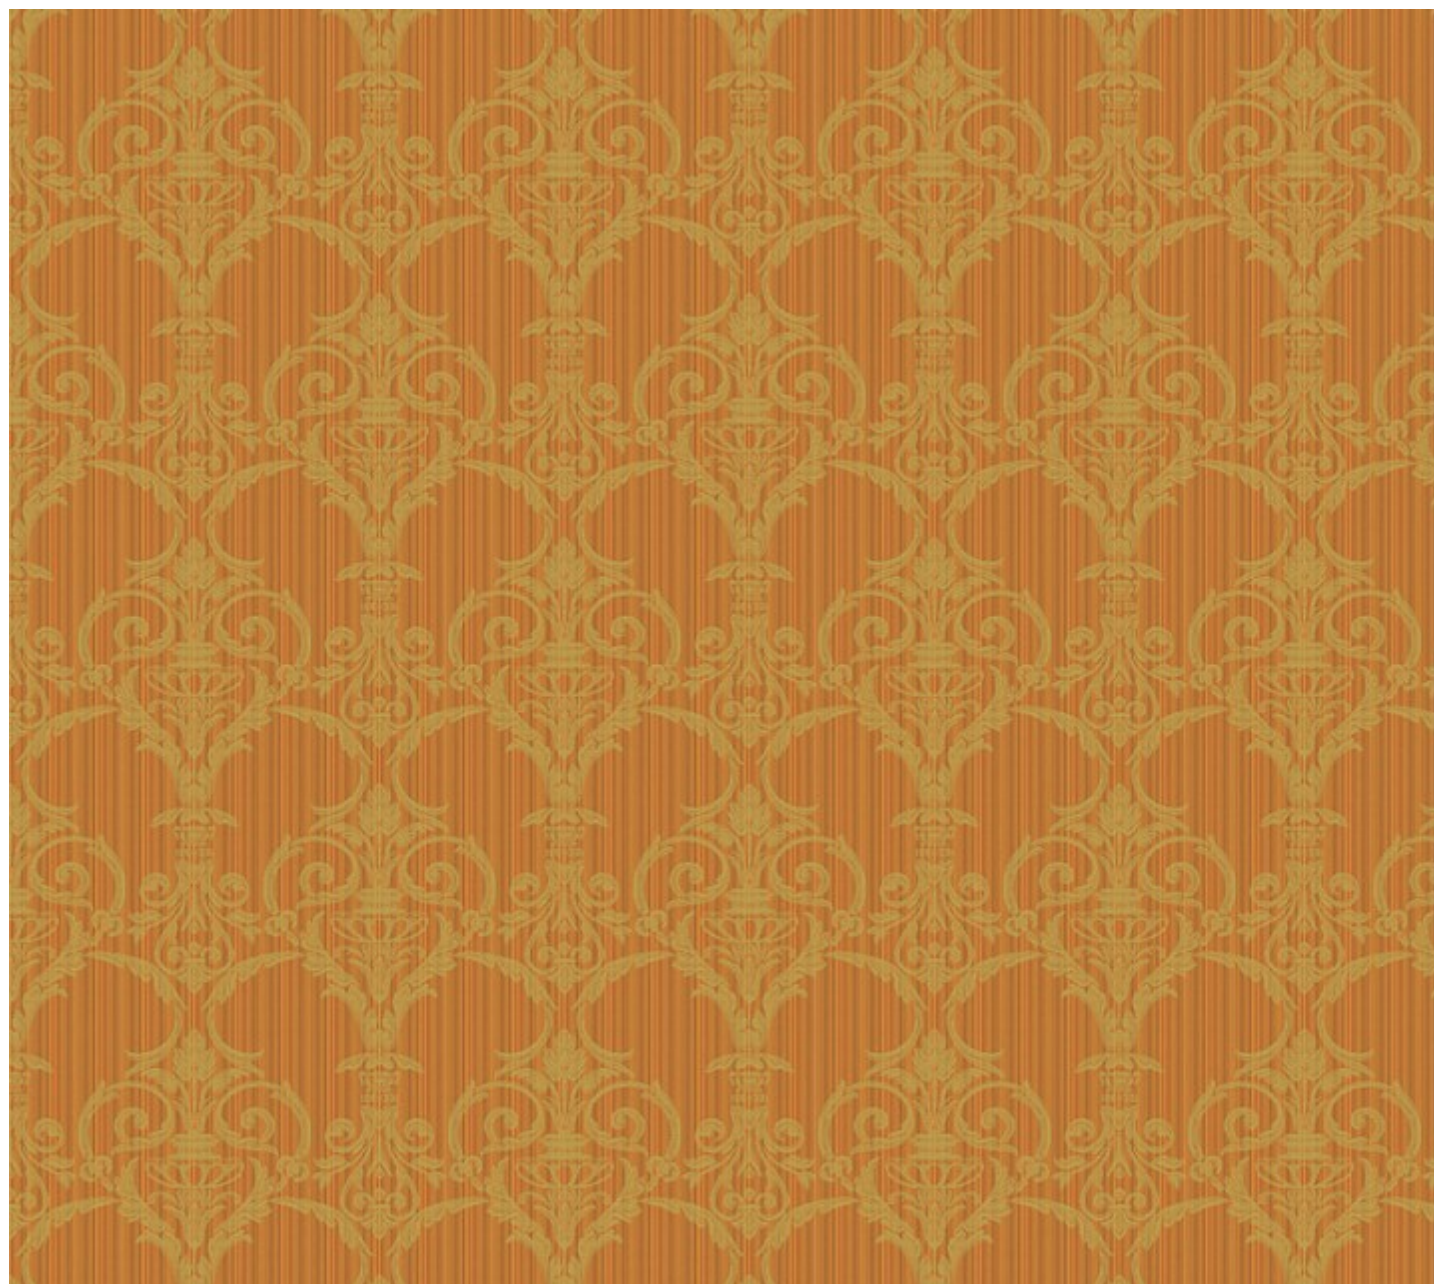


55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 36 cm
REPEAT WARP REPETICIÓN URDIMBRE: 19 inches - 46.5 cm



ADUA 01

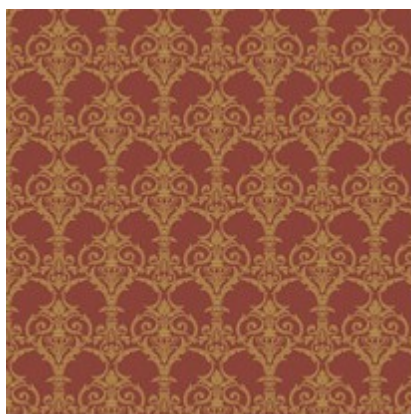

ADUA 15



ADUA 38



ADUA 53



ADUA 67

BONDADE DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 36 cm
REPEAT WARP REPETICIÓN URDIMBRE: 13 inches - 33.2 cm



BONDAGE 01



BONDAGE 15



BONDAGE 38




BONDAGE 53




BONDAGE 67

DEBRA DESIGN

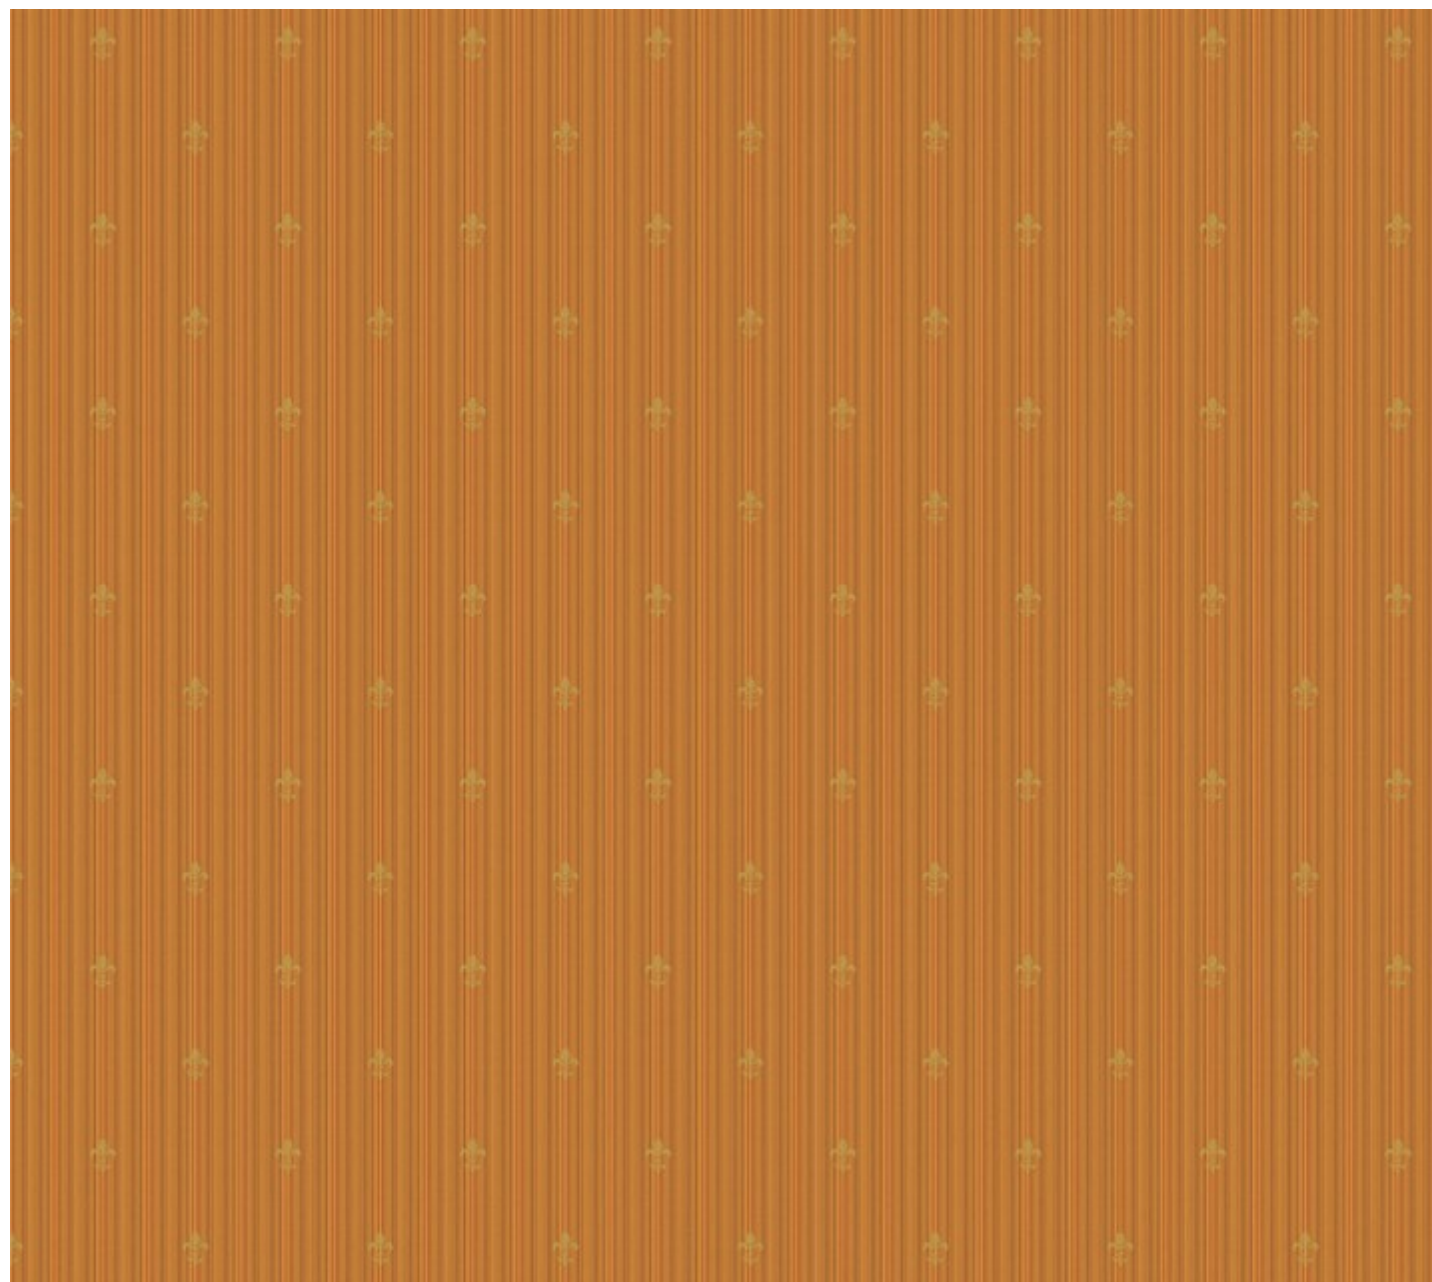


55 inch. simulation
140 cm. simulación


REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 18 cm
REPEAT WARP REPETICIÓN URDIMBRE: 7 inches - 17.1 cm

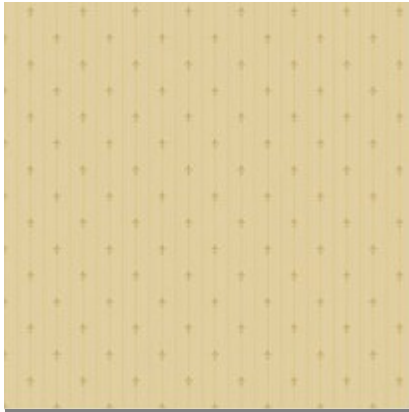


DEBRA 01

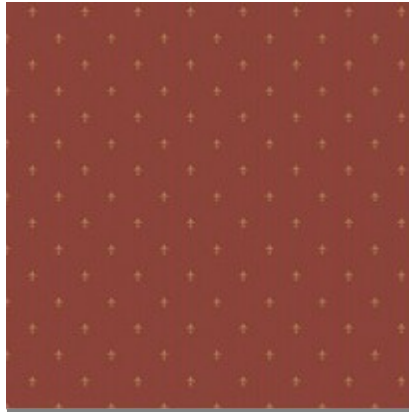

DEBRA 15

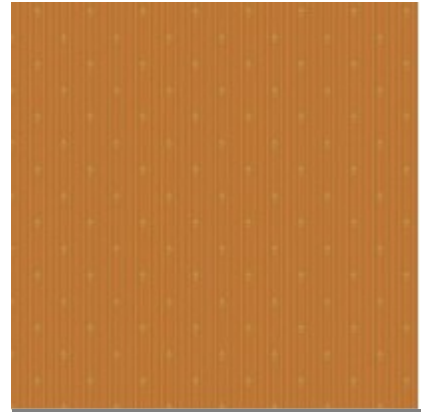

DEBRA 38

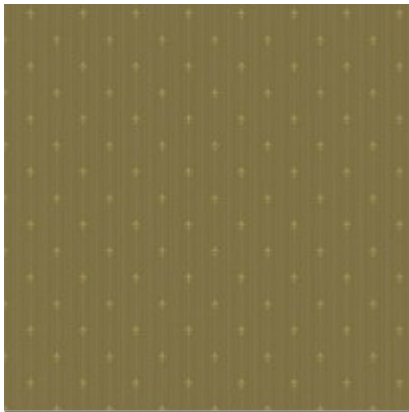

DEBRA 53



DEBRA 67

SAUDADE DESIGN



← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 36 cm


REPEAT WARP REPETICIÓN URDIMBRE: ----




SAUDADE 01



SAUDADE 15

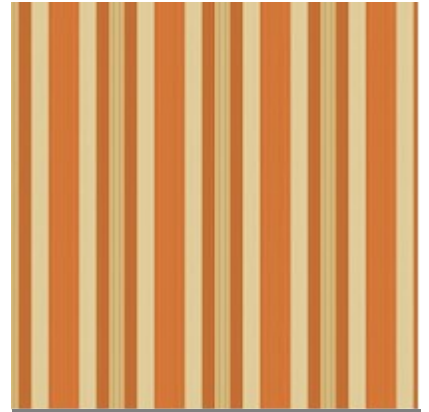

SAUDADE 38

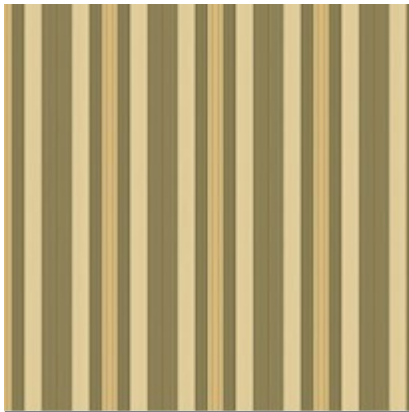


SAUDADE 53



SAUDADE 67


SOLEDADE DESIGN

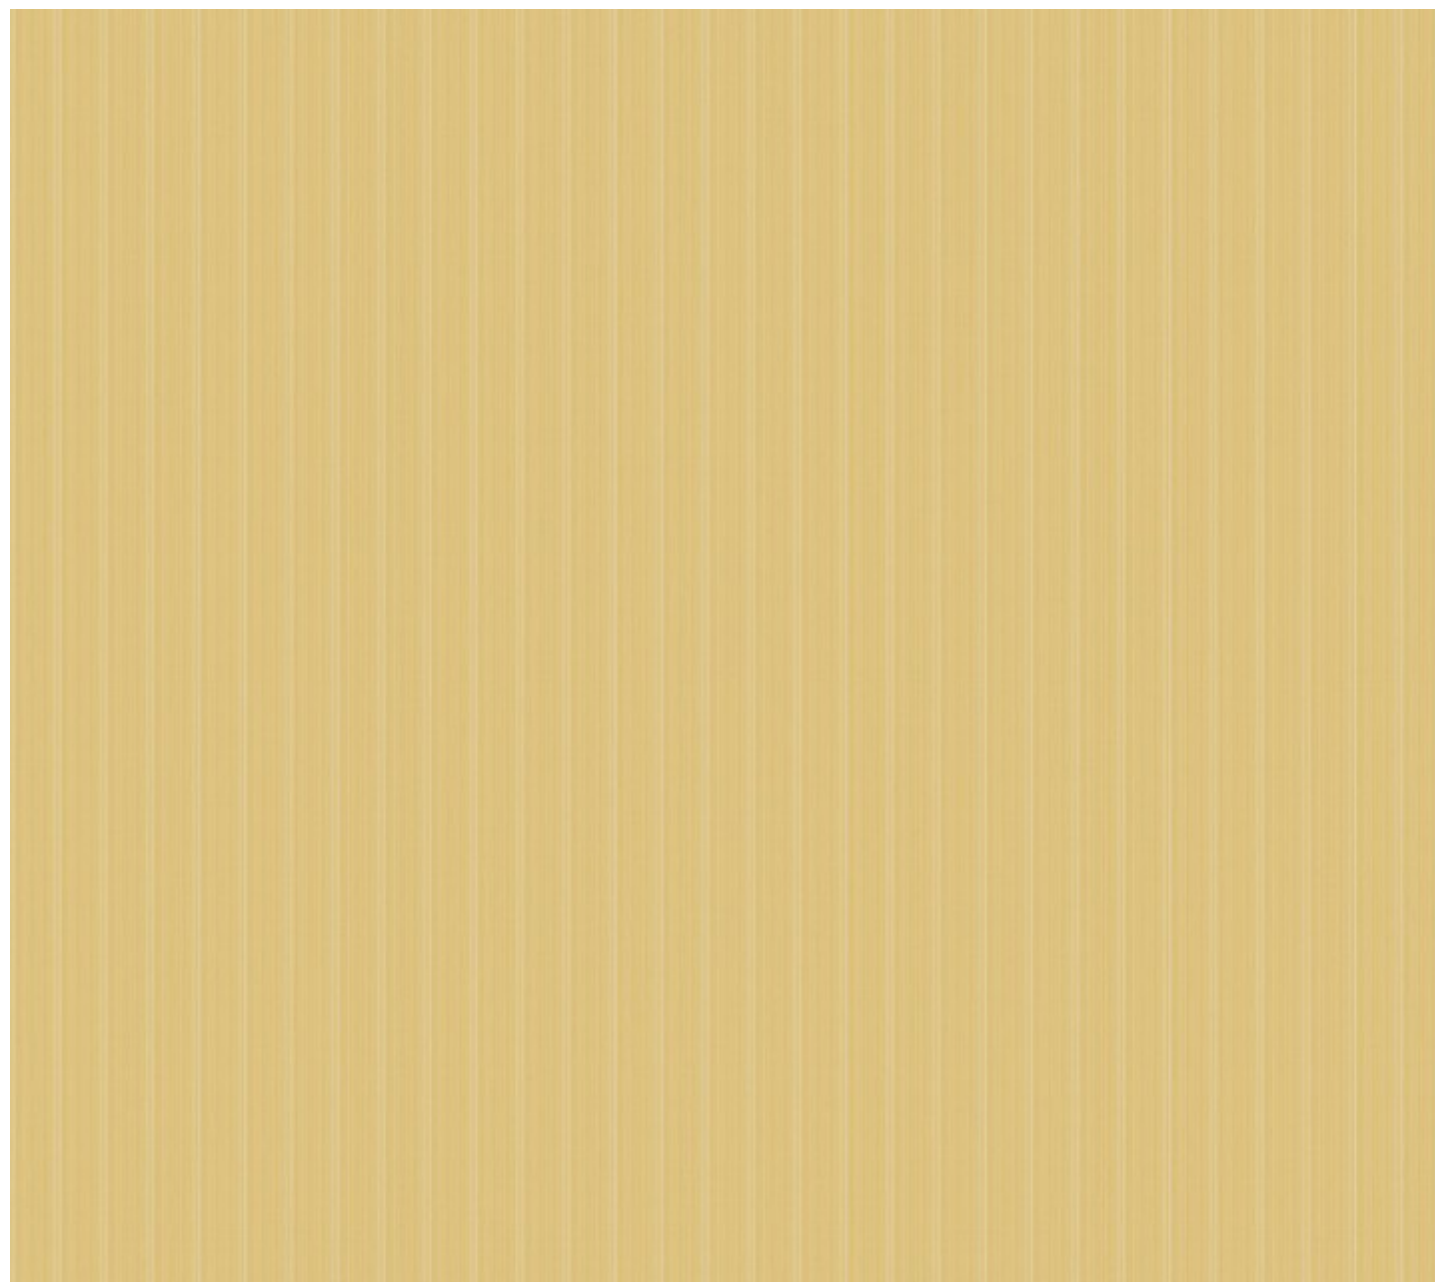

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 2 inches - 4.5 cm


REPEAT WARP REPETICIÓN URDIMBRE: ----

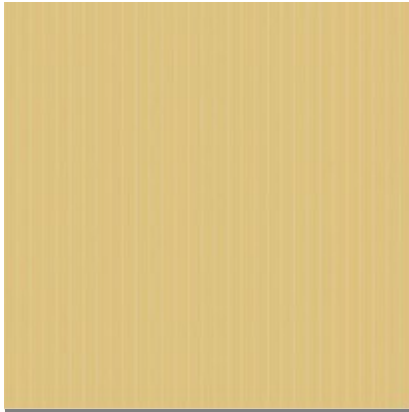


SOLEDADE 01




SOLEDADE 15

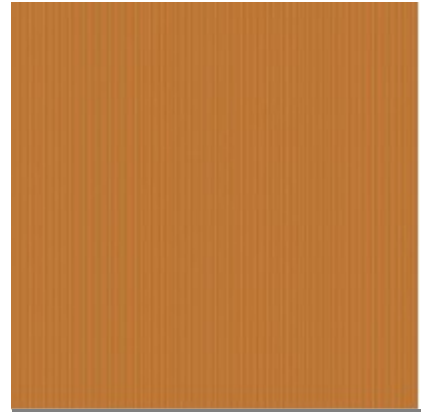

SOLEDADE 38

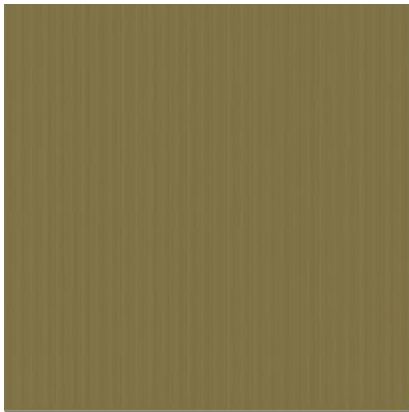

SOLEDADE 53

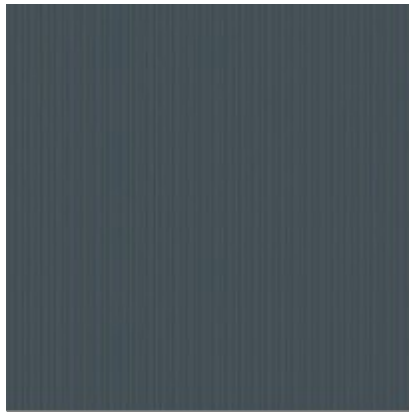

SOLEDADE 67

VERDADE DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 36 cm

REPEAT WARP REPETICIÓN URDIMBRE: ----



VERDADE 01

BONDADE COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	52114100	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES70% CO30%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	7.95 / 270	
WEIGHT (oz/yd) / PESO (gr/ml)	24.38 / 756.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	10000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	4-5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	4	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	4	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1.5	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2	UNE EN ISO 5077
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.