



COOPER COLLECTION







COOPER DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 15 inches - 36.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 14 inches - 35 cm



COOPER 06



COOPER 82



COOPER 97



COOPER 98

DUSTIN DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 8 inches - 21 cm
REPEAT WARP REPETICIÓN URDIMBRE: 7 inches - 17.5 cm



DUSTIN 06



DUSTIN 82




DUSTIN 97



DUSTIN 98

HARPER DESIGN

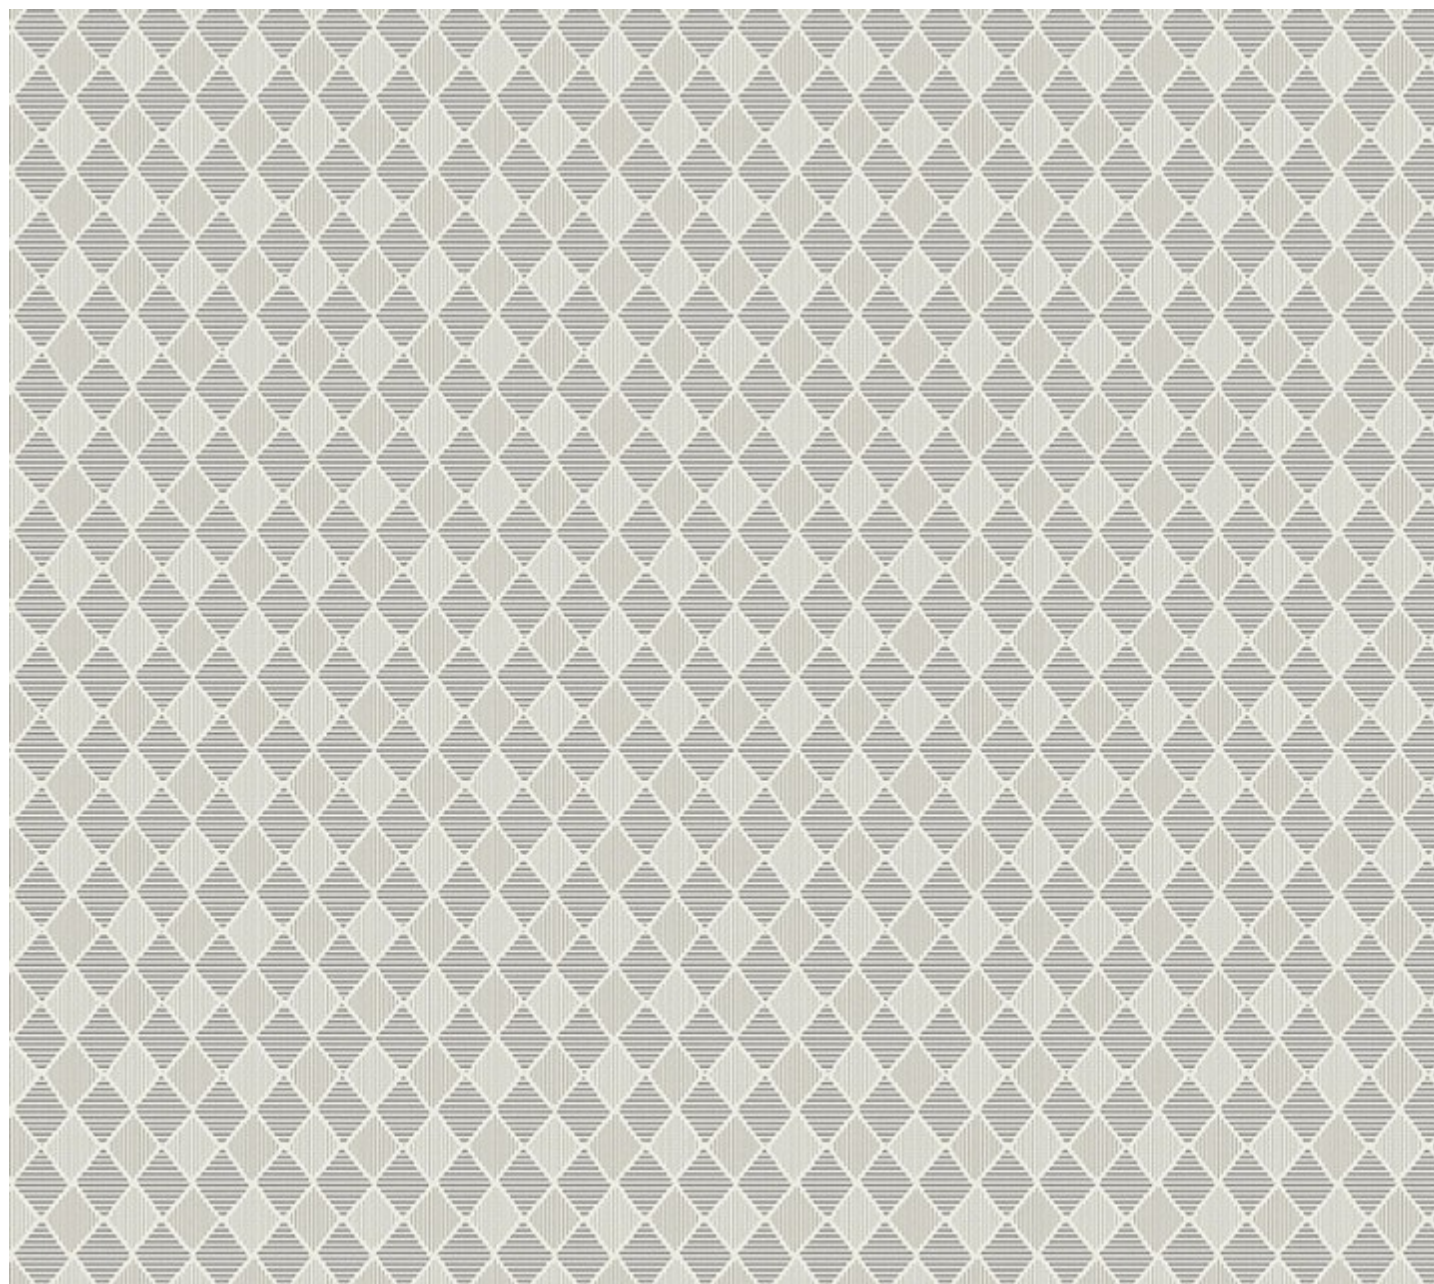

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35 cm
REPEAT WARP REPETICIÓN URDIMBRE: 5 inches - 13 cm



HARPER 06



HARPER 82



HARPER 97



HARPER 98

HOPER DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 6 inches - 15 cm
REPEAT WARP REPETICIÓN URDIMBRE: 7 inches - 17.5 cm



HOPER 06



HOPER 82




HOPER 97



HOPER 98

TANER DESIGN

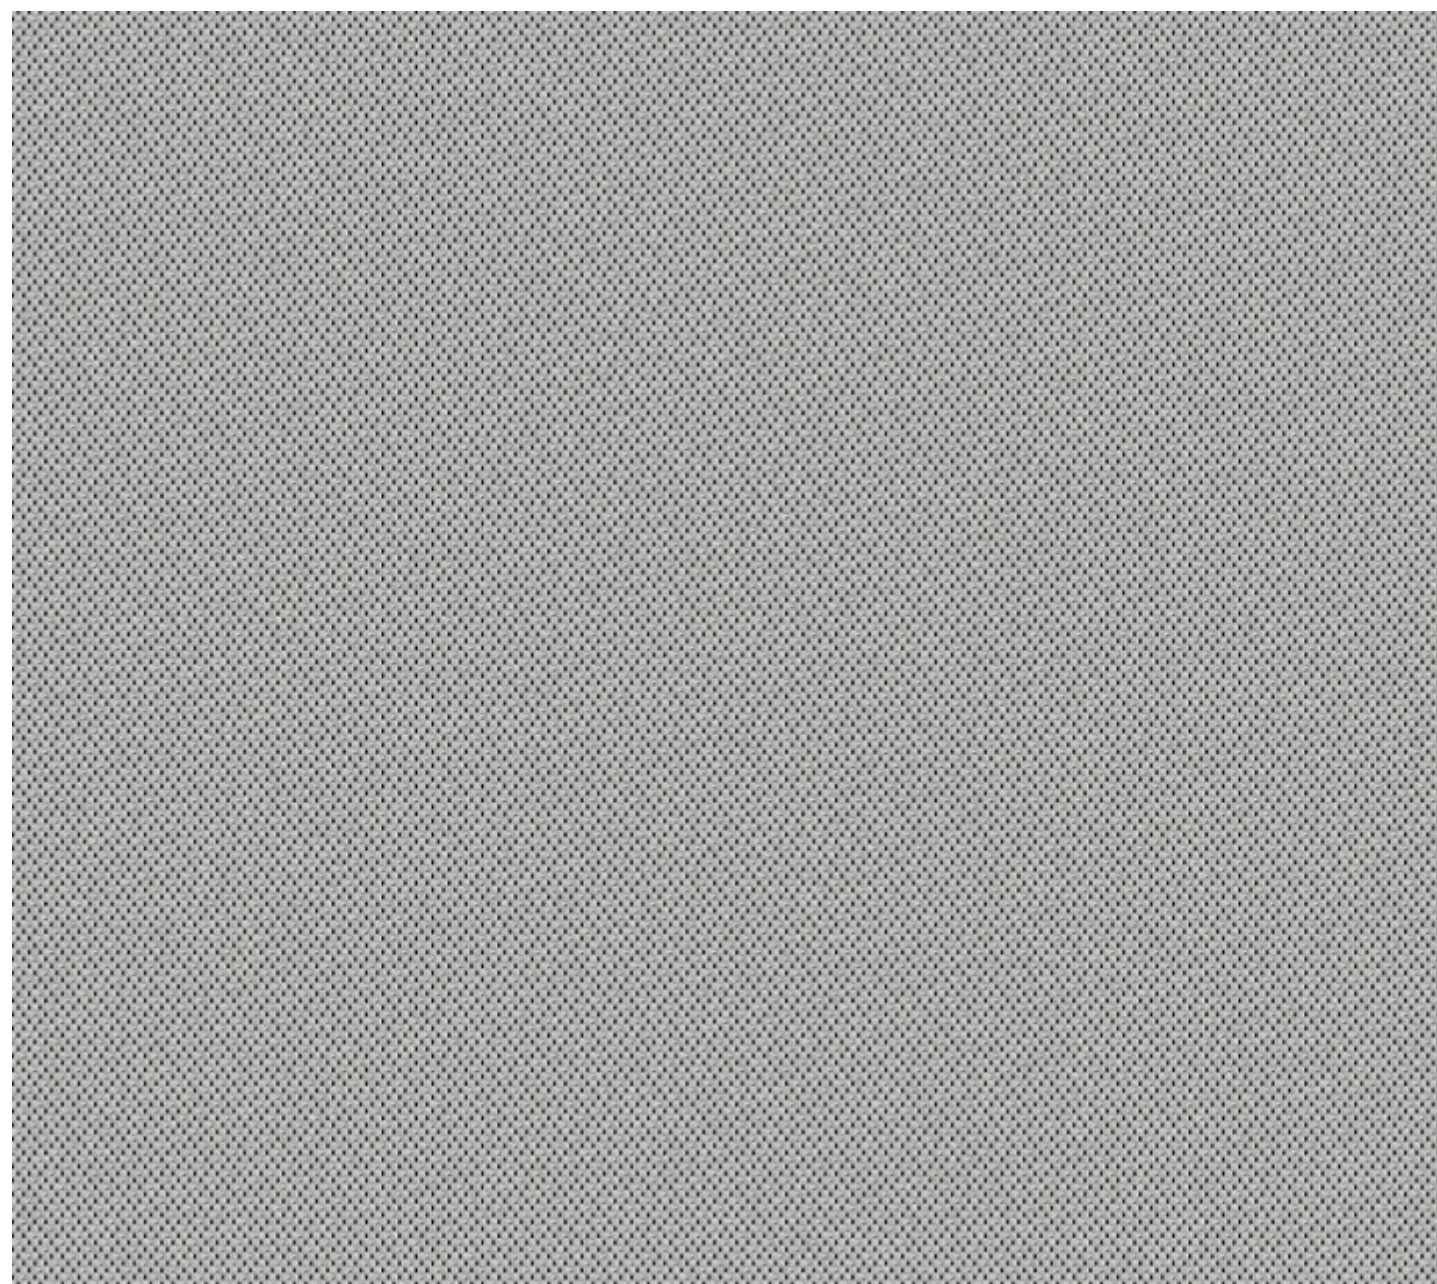


← 55 inch. simulation 140 cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: ...
REPEAT WARP REPETICIÓN URDIMBRE: ...




TANER 06

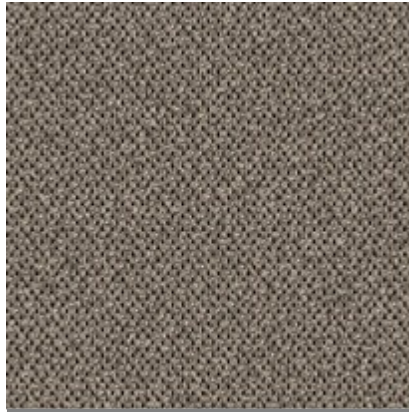


TANER 82

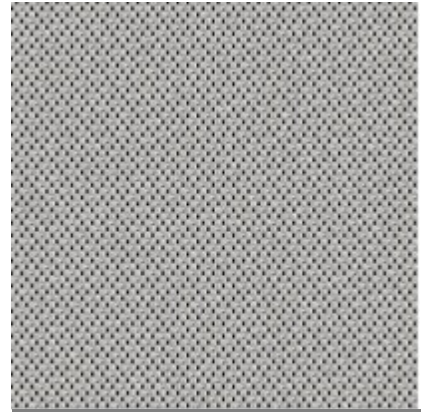

TANER 97

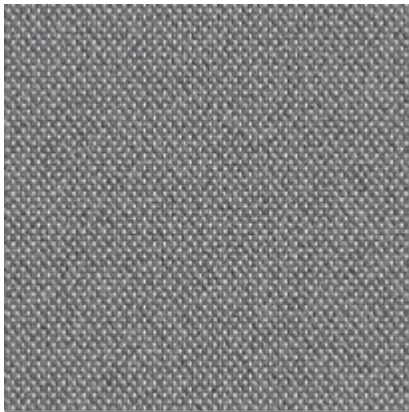

TANER 98

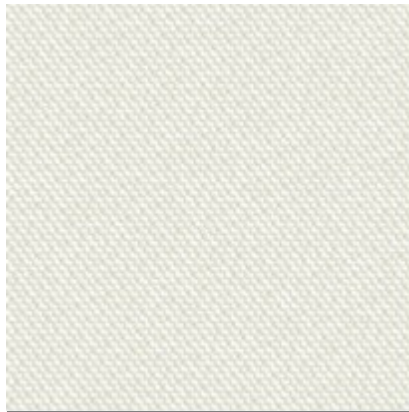

TANER LIN

COOPER COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	55 / 140	
H S CODE / PARTIDA ARANCELARIA	54075300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5 / 25	
COMPOSITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	13.25 / 450	
WEIGHT (oz/yd) / PESO (gr/ml)	20.32 / 630.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	32000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	4-5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2	UNE EN ISO 5077
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	120	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	150	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	0.6	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	0.30	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.