




COT PERCAL








COT PERCAL SAB DESIGN

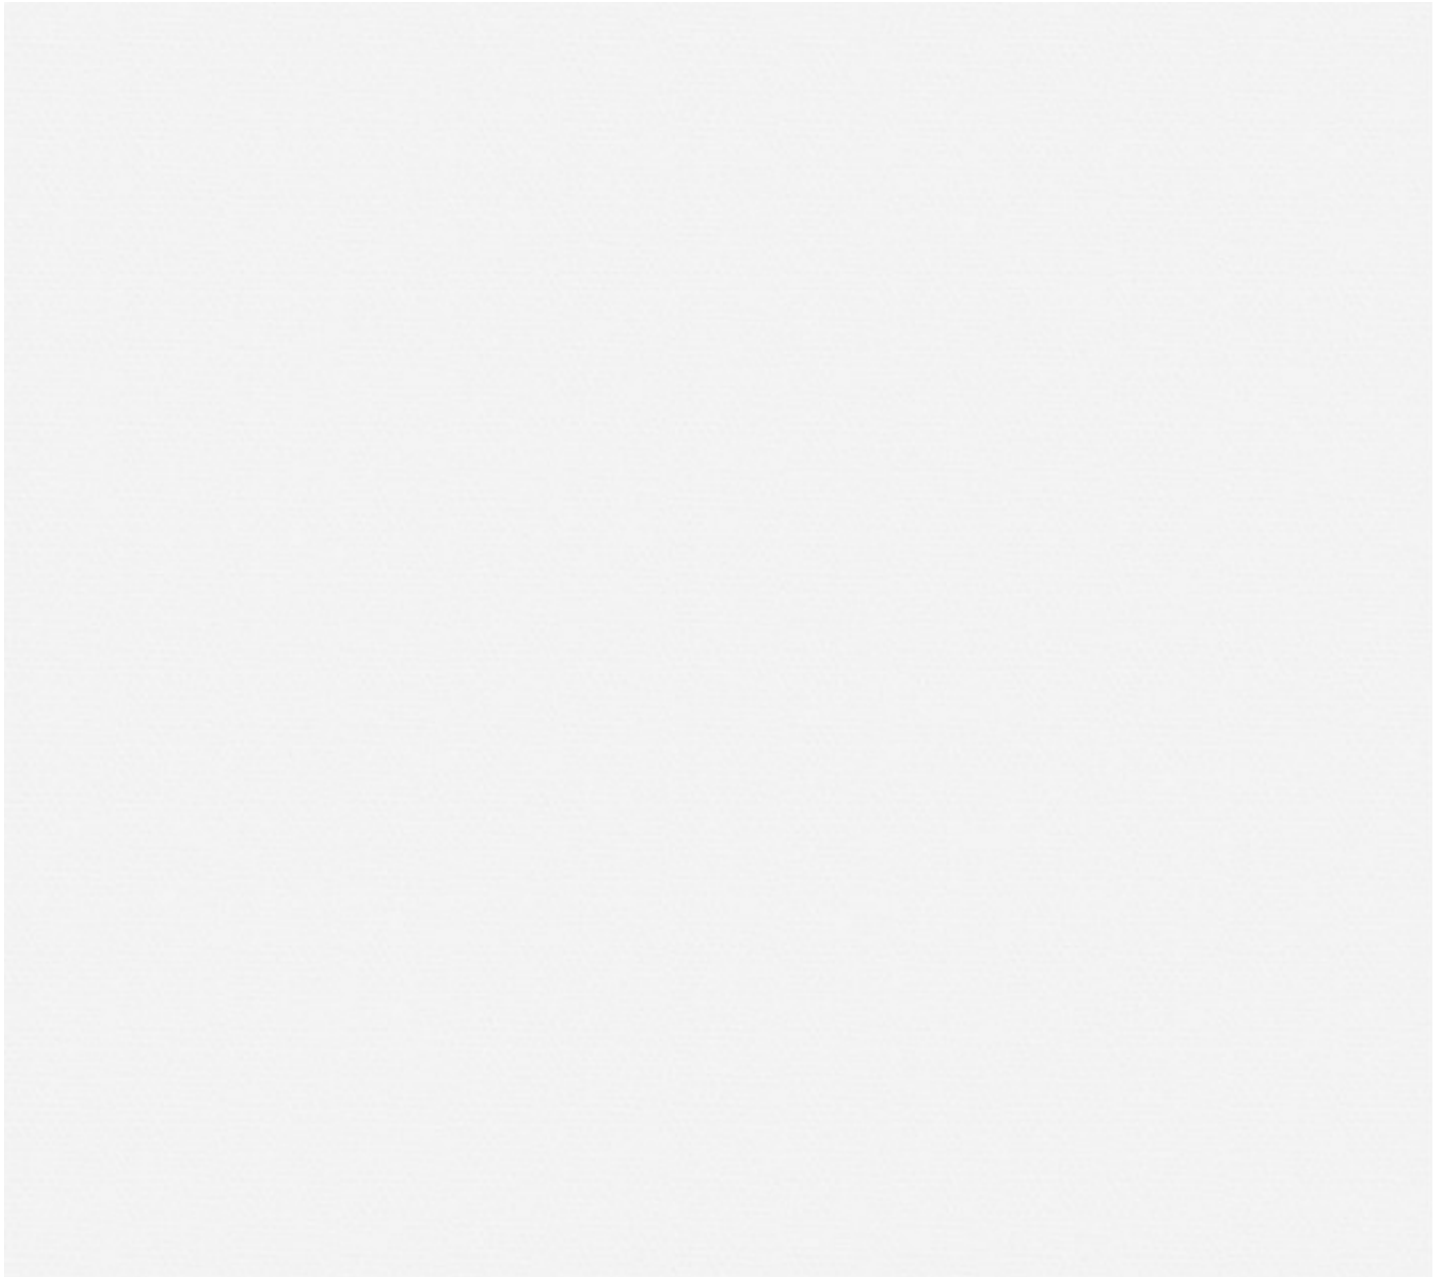

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: ----
REPEAT WARP REPETICIÓN URDIMBRE: ----

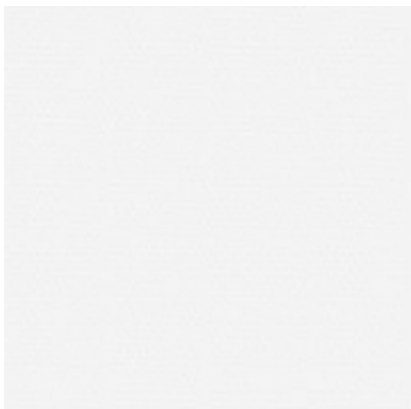

COT PERCAL SAB BCO

COT PERCAL COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	52081219	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	38.5 / 35	
COMPO SITION / COMPOSICION	CO100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	3.53 / 120	
WEIGHT (oz/yd) / PESO (gr/ml)	10.84 / 336.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	12000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	4-5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	4	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	3	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	6	UNE EN ISO 5077

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.