



DAMASCO COLLECTION







DAMASCO DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.0 cm
REPEAT WARP REPETICIÓN URDIMBRE: 18 inches - 45.7 cm



DAMASCO 00



DAMASCO 01



DAMASCO 02



DAMASCO 03



DAMASCO 04




DAMASCO 12



DAMASCO 13




DAMASCO 15

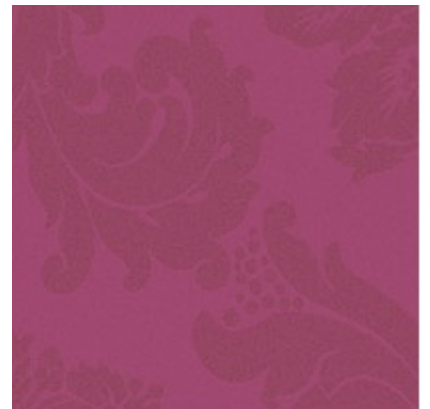

DAMASCO 18



DAMASCO 29

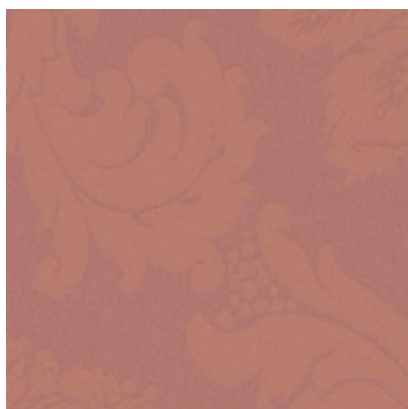

DAMASCO 30



DAMASCO 32



DAMASCO 43



DAMASCO 45



DAMASCO 49



DAMASCO 52



DAMASCO 58



DAMASCO 59



DAMASCO 61



DAMASCO 62



DAMASCO 63



DAMASCO 67



DAMASCO 69



DAMASCO 75



DAMASCO 81




DAMASCO 88




DAMASCO 98

DAMASCO BLANCO DESIGN

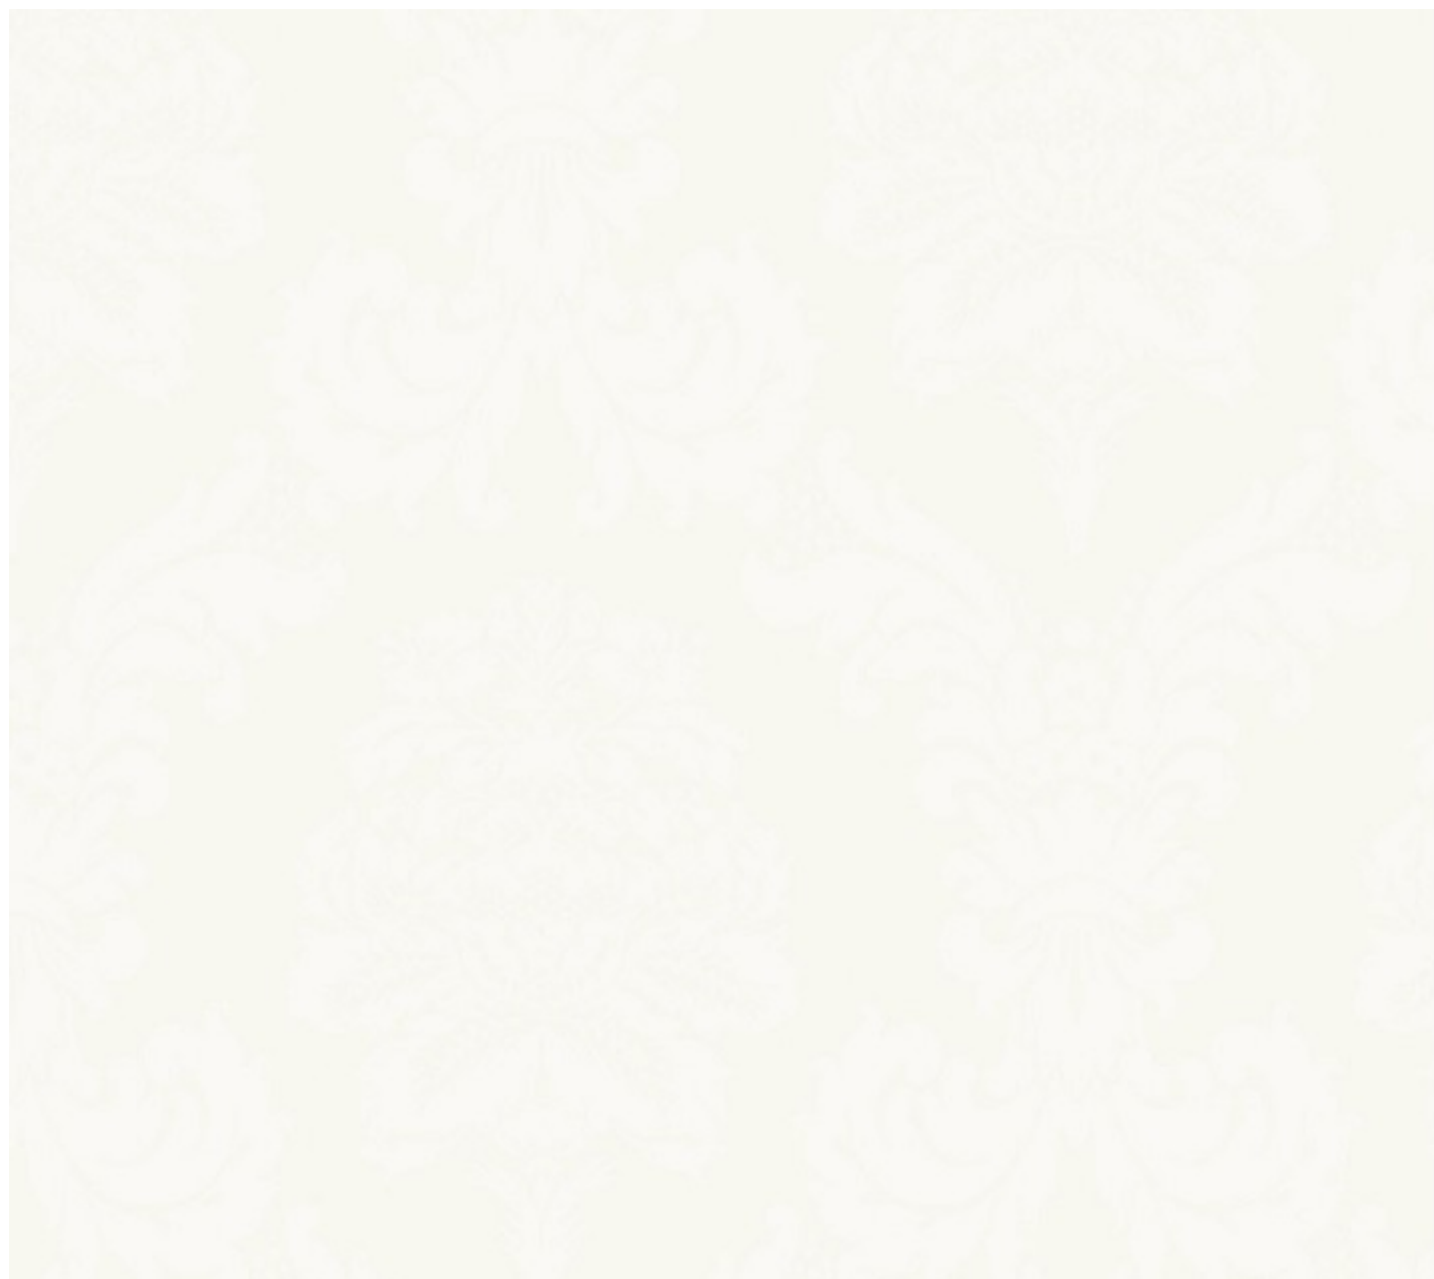

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.0 cm
REPEAT WARP REPETICIÓN URDIMBRE: 19 inches - 48.4 cm

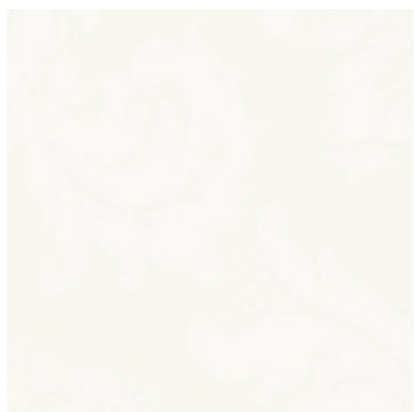

DAMASCO BLANCO BCO

DAMASCO COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	52113900	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PE65% CO35%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	8.83 / 300	
WEIGHT (oz/yd) / PESO (gr/ml)	27.09 / 840.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	13000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	4	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	4	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	4	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	4-5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2.3	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	1.4	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1500	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	869	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	70	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	27.4	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	71	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	63	UNE EN ISO 13937-3
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1.8	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2	UNE EN ISO 13936-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.