




GEODARK FR







GEODARK FR DESIGN

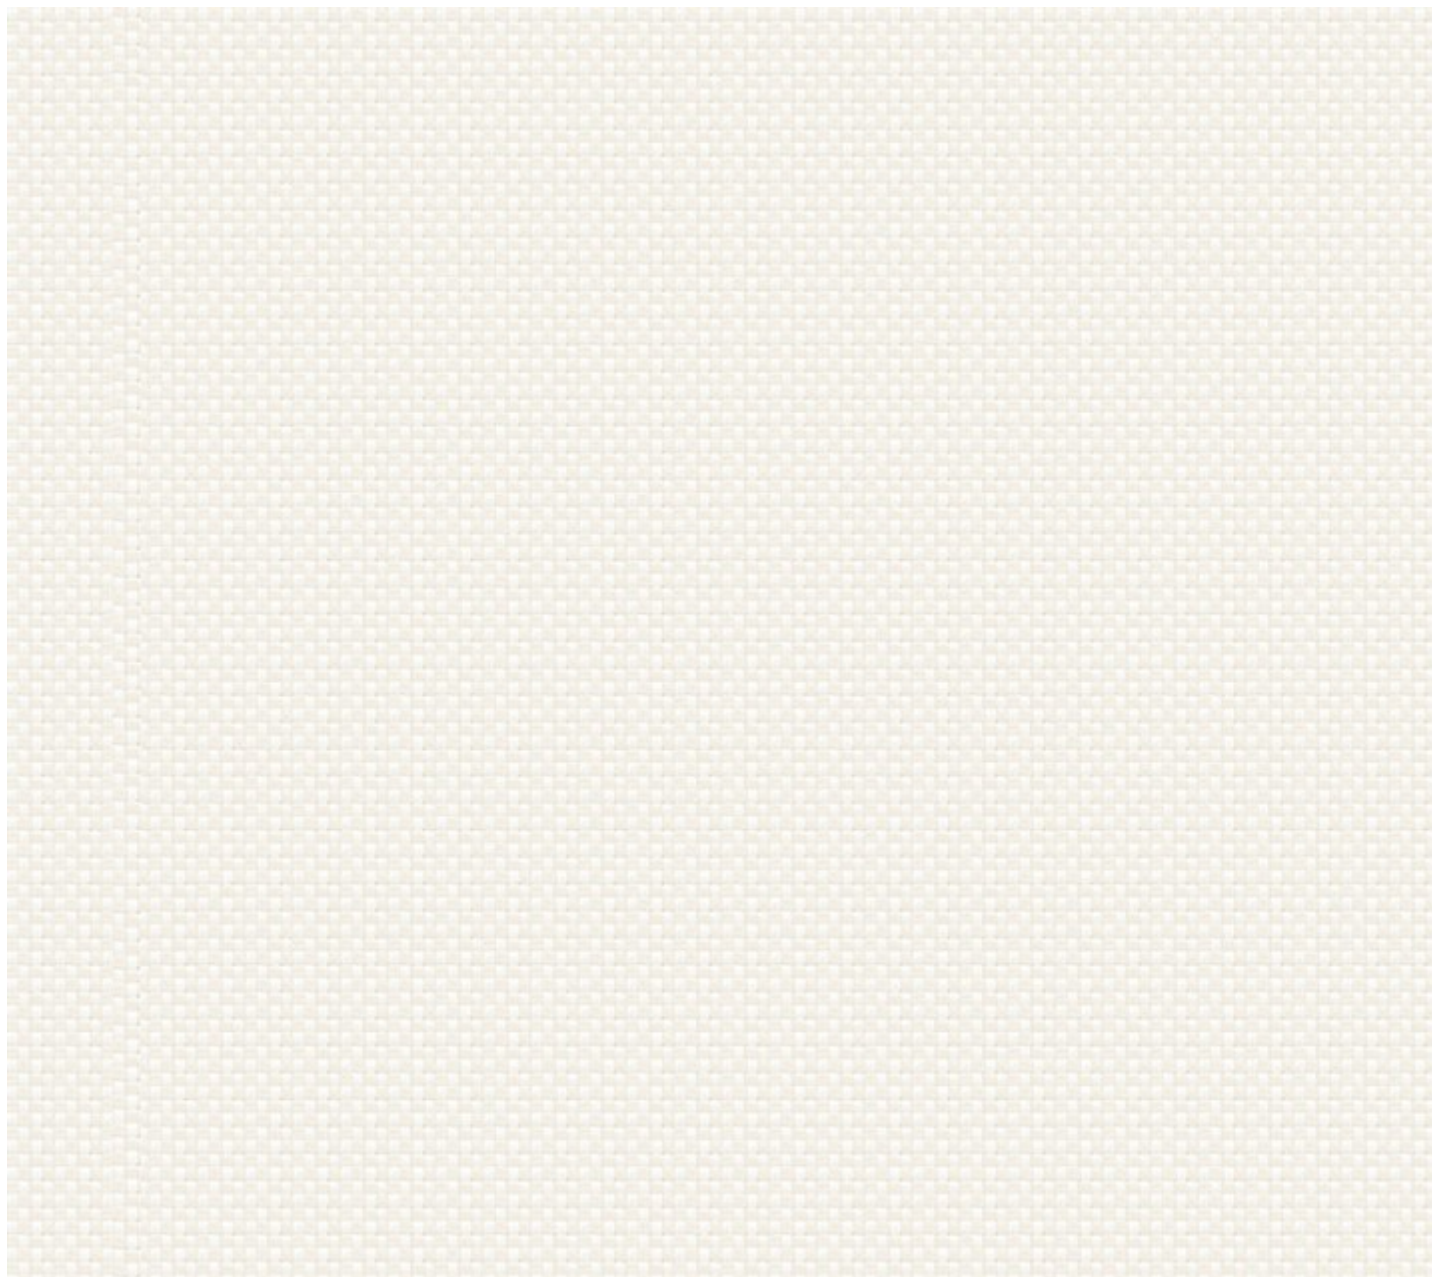


← 55 inch. simulation 140 cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:



GEODARK FR 02

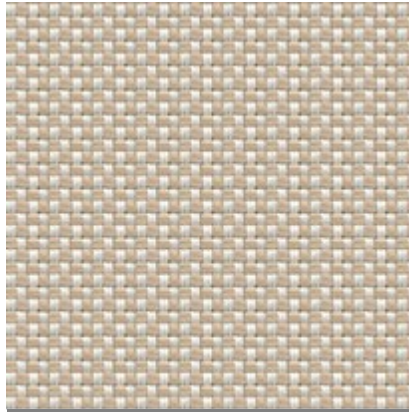


GEODARK FR 05

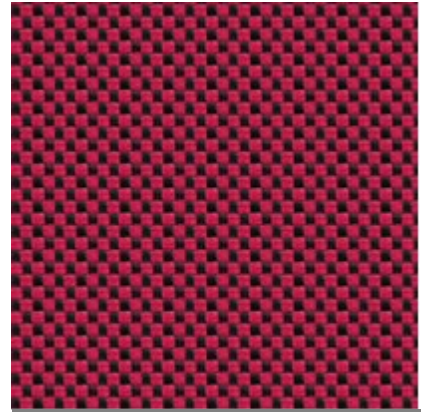

GEODARK FR 18



GEODARK FR 34

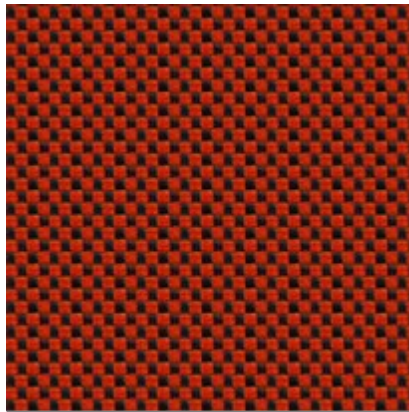


GEODARK FR 36




GEODARK FR 42



GEODARK FR 55

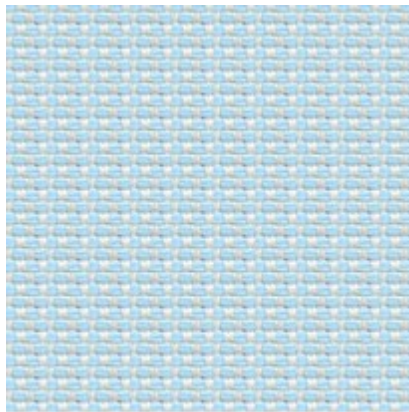

GEODARK FR 62

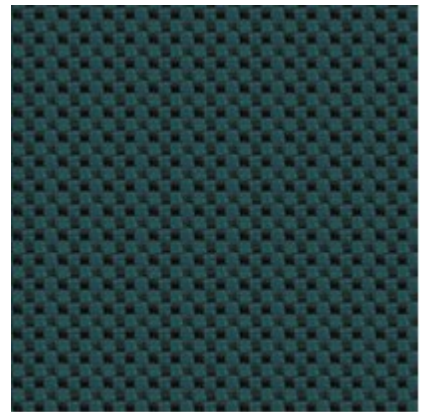

GEODARK FR 66




GEODARK FR 85




GEODARK FR 92



GEODARK FR 94

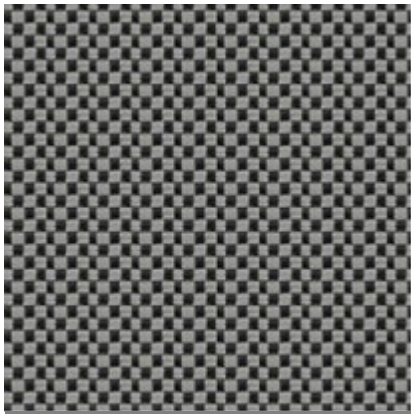

GEODARK FR 96

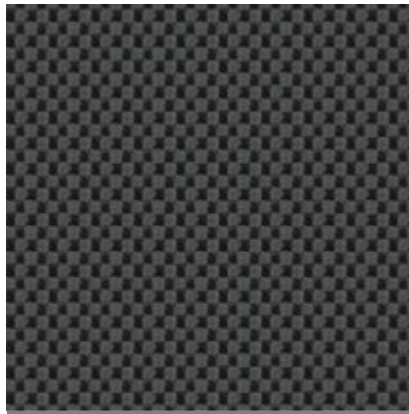

GEODARK FR 97



GEODARK FR BCO

GEODARK FR COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	122 / 310	
H S CODE / PARTIDA ARANCELARIA	54075300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	22.0 / 20	
COMPO SITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	15.01 / 510	
WEIGHT (oz/yd) / PESO (gr/ml)	50.99 / 1581.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1.8	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.5	UNE EN ISO 5077
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2.5	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	3.6	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C-1	UNE EN 13773:2003
OPACITY 100000 LUX / OPACIDAD 100000 LUX	0-0.25	CS1451LUX

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.