




KARMA COLLECTION








ALKIMIA DESIGN

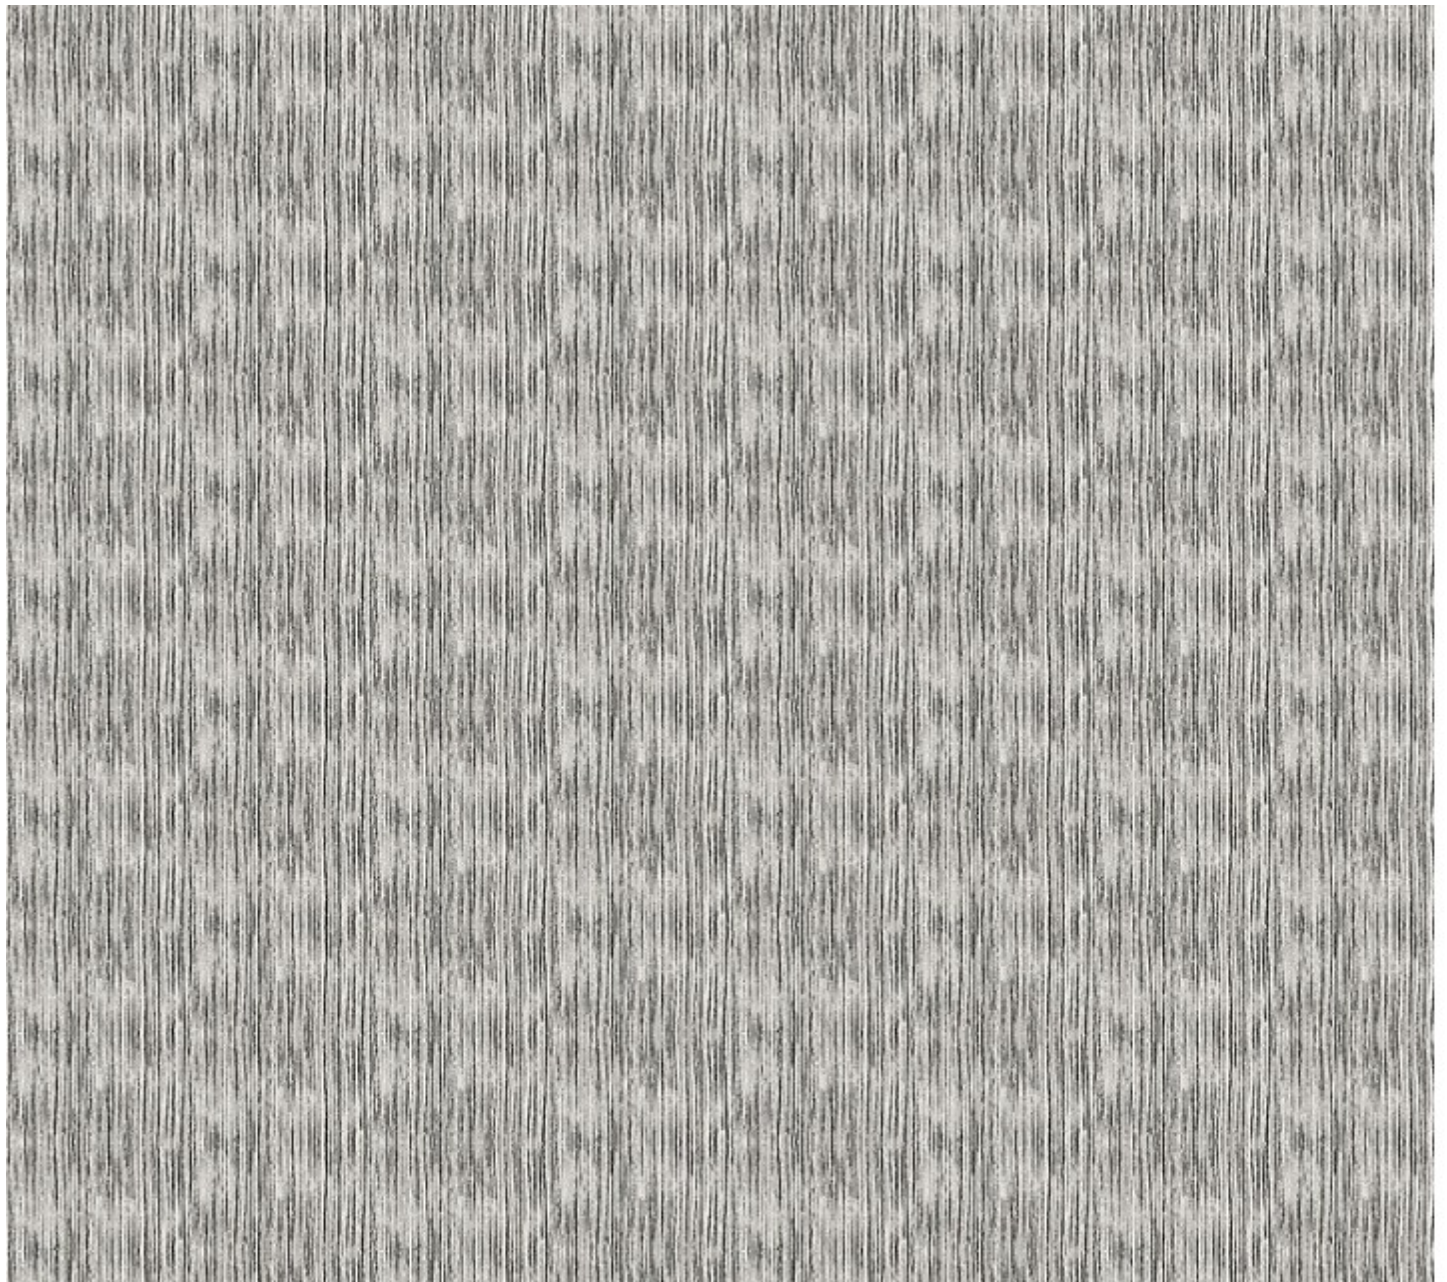

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 28 inches - 70.8 cm
REPEAT WARP REPETICIÓN URDIMBRE: 8 inches - 21 cm

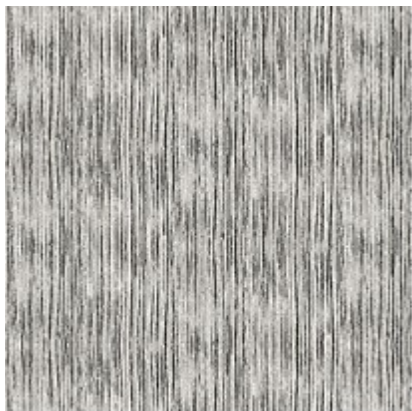

ALKIMIA 32



ALKIMIA 35



ALKIMIA 45



ALKIMIA 50



ALKIMIA 60

JASMINE DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 15 inches - 37.3 cm
REPEAT WARP REPETICIÓN URDIMBRE: 8 inches - 20.7 cm



JASMINE 32



JASMINE 35



JASMINE 45



JASMINE 50



JASMINE 60

KARMA DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 30 inches - 75.8 cm



KARMA 32



KARMA 35



KARMA 45




KARMA 50




KARMA 60

MARAL DESIGN

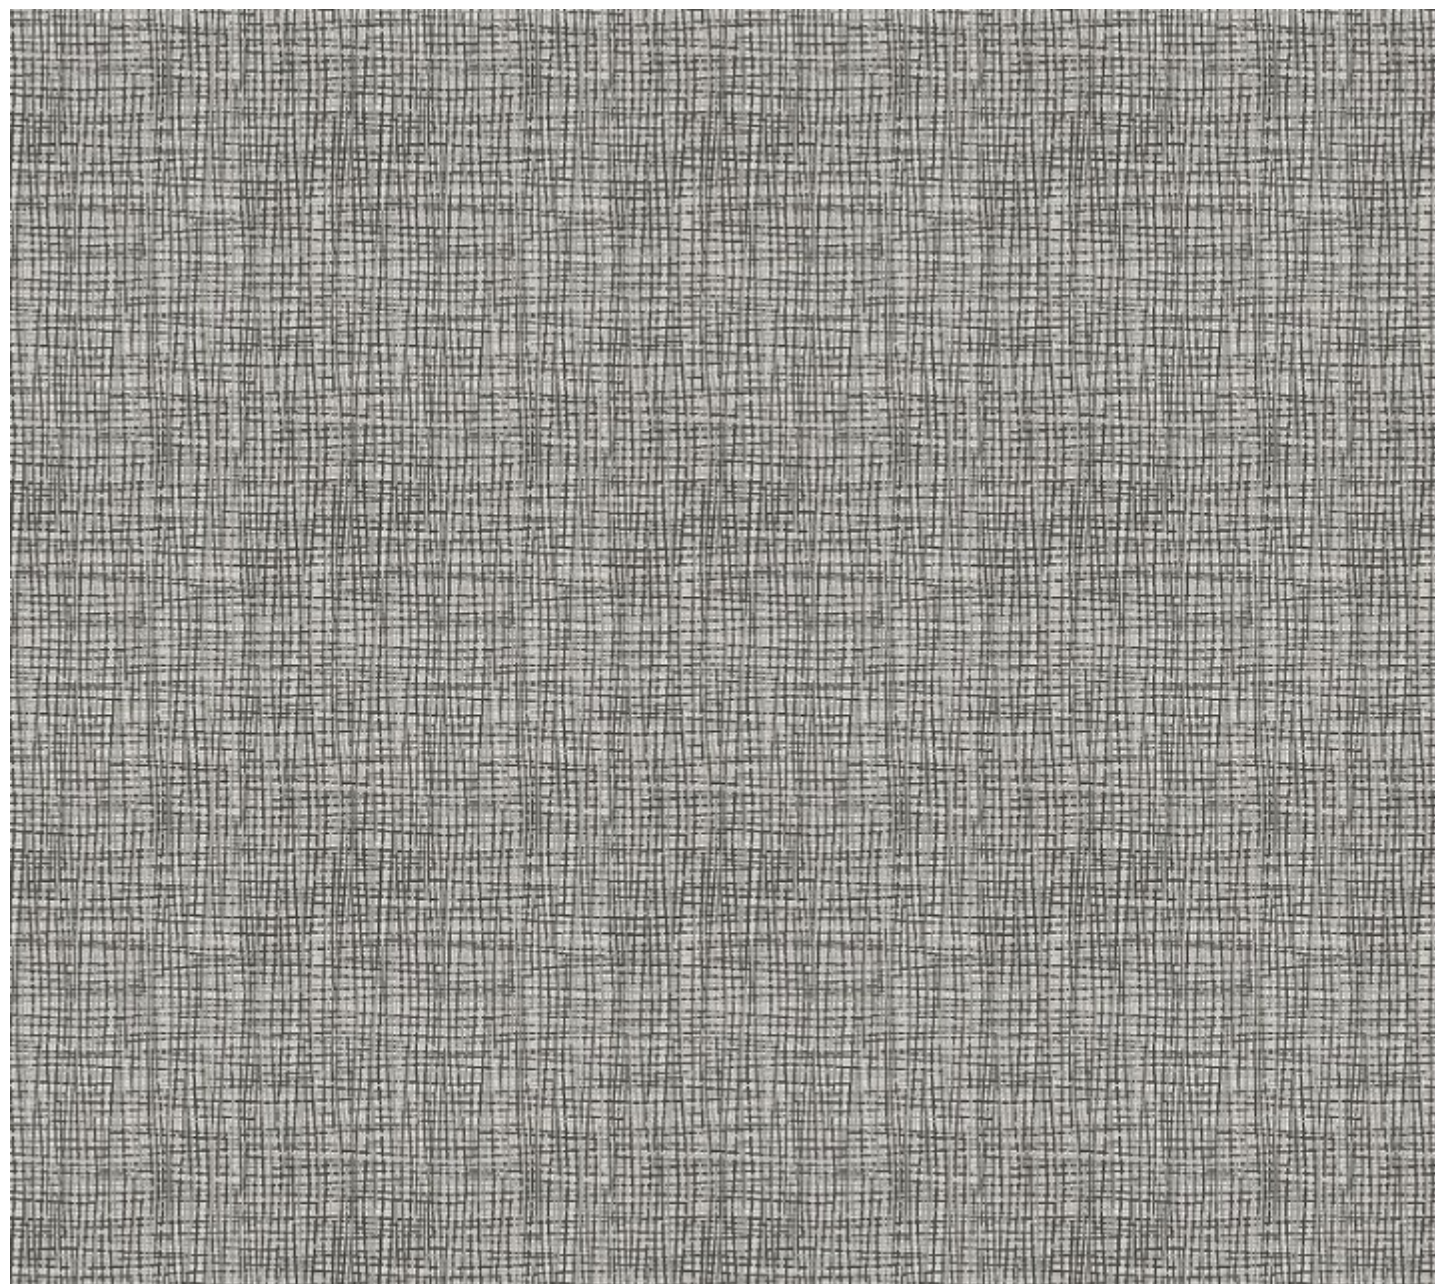

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.6 cm
REPEAT WARP REPETICIÓN URDIMBRE: 14 inches - 35.5 cm

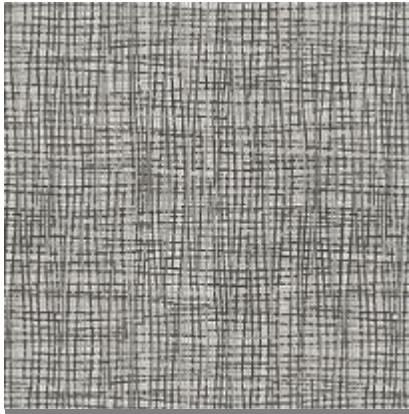

MARAL 32



MARAL 35



MARAL 45




MARAL 50




MARAL 60

NARNIA DESIGN

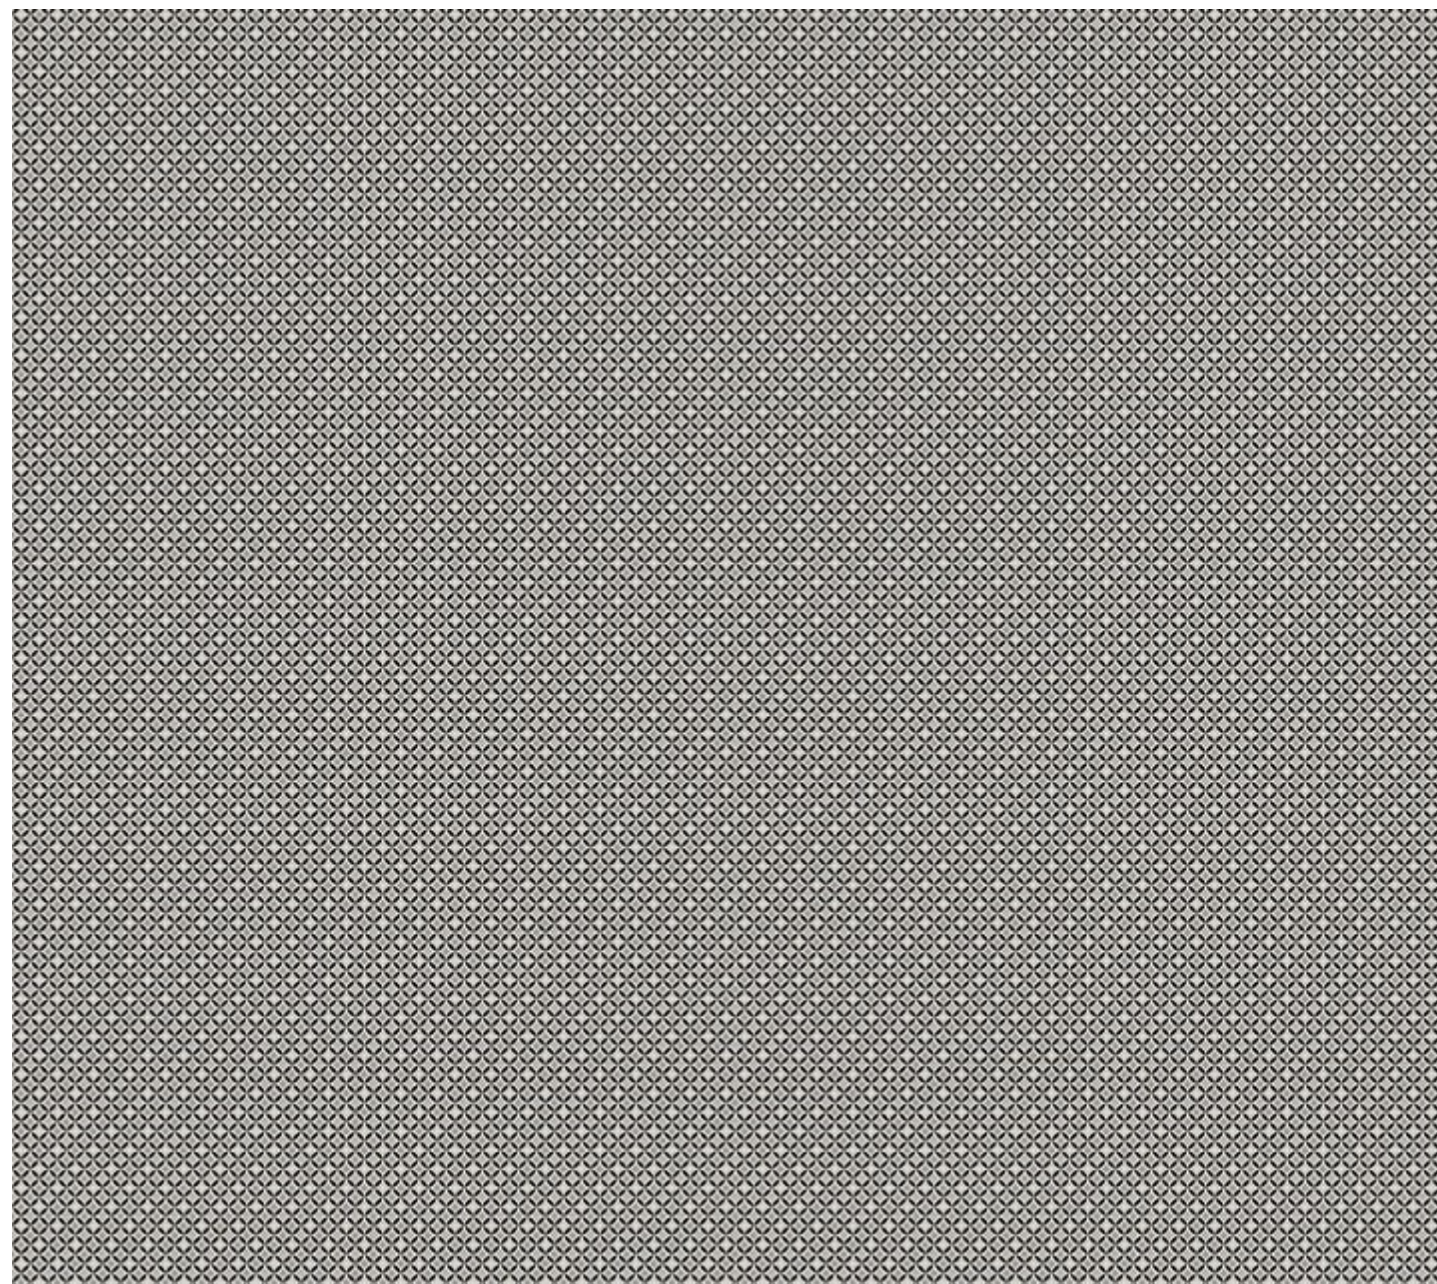


55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 1 inches - 1.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 2 inches - 3.5 cm

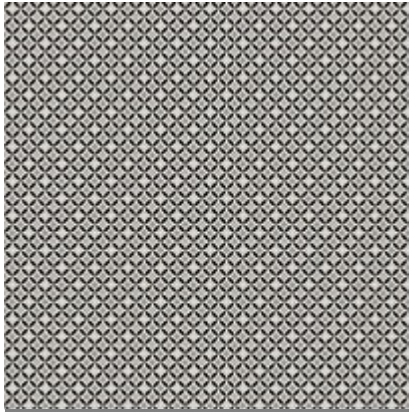


NARNIA 32

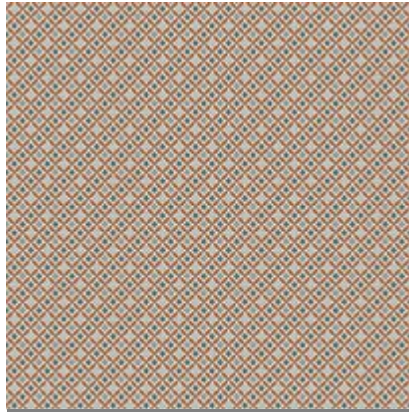


NARNIA 35



NARNIA 45

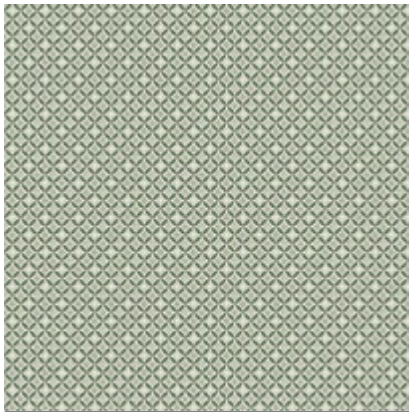

NARNIA 50

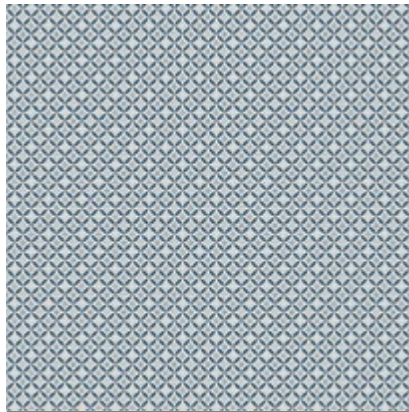

NARNIA 60

KARMA COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	54078300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES62% CO33%PAN5%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	9.42 / 320	
WEIGHT (oz/yd) / PESO (gr/ml)	28.90 / 896.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	15000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	4	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	3	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2.8	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1011.46	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	1143.13	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	84.05	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	63.4	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	75.66	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	168.35	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2.2	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2.8	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.