




LIBERTY COLLECTION








LIBERTY DESIGN

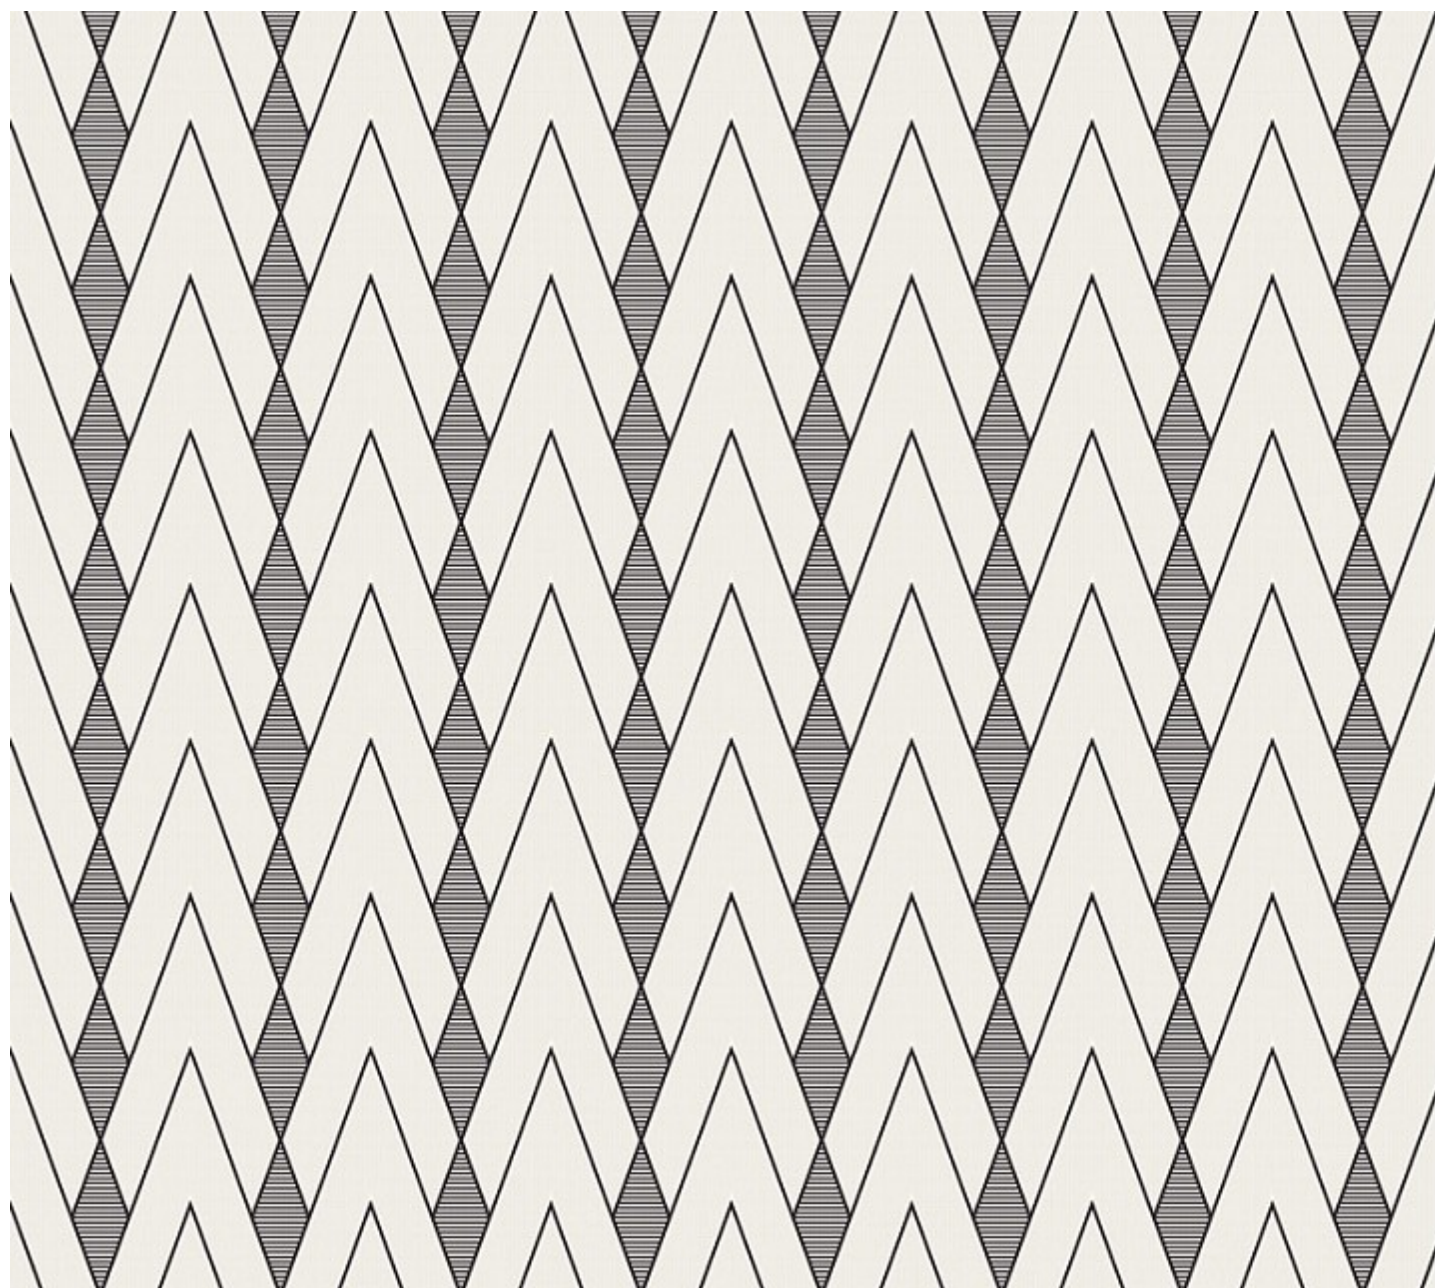

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 17.6 cm
REPEAT WARP REPETICIÓN URDIMBRE: 6 inches - 14.5 cm

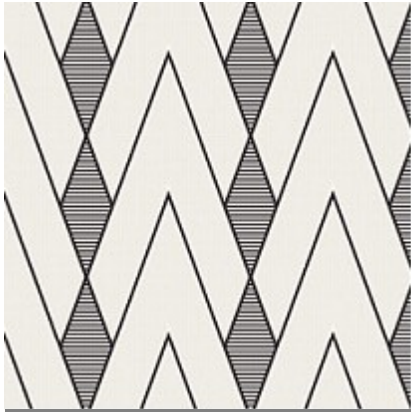

LIBERTY 02




LIBERTY 06




LIBERTY 40



LIBERTY 60

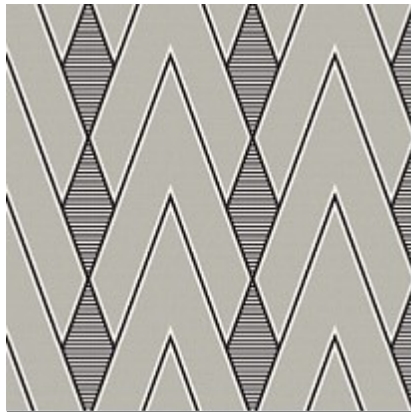


LIBERTY 92

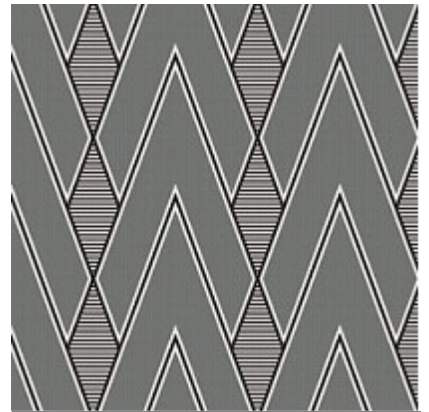

LIBERTY 95

MAJESTIC DESIGN

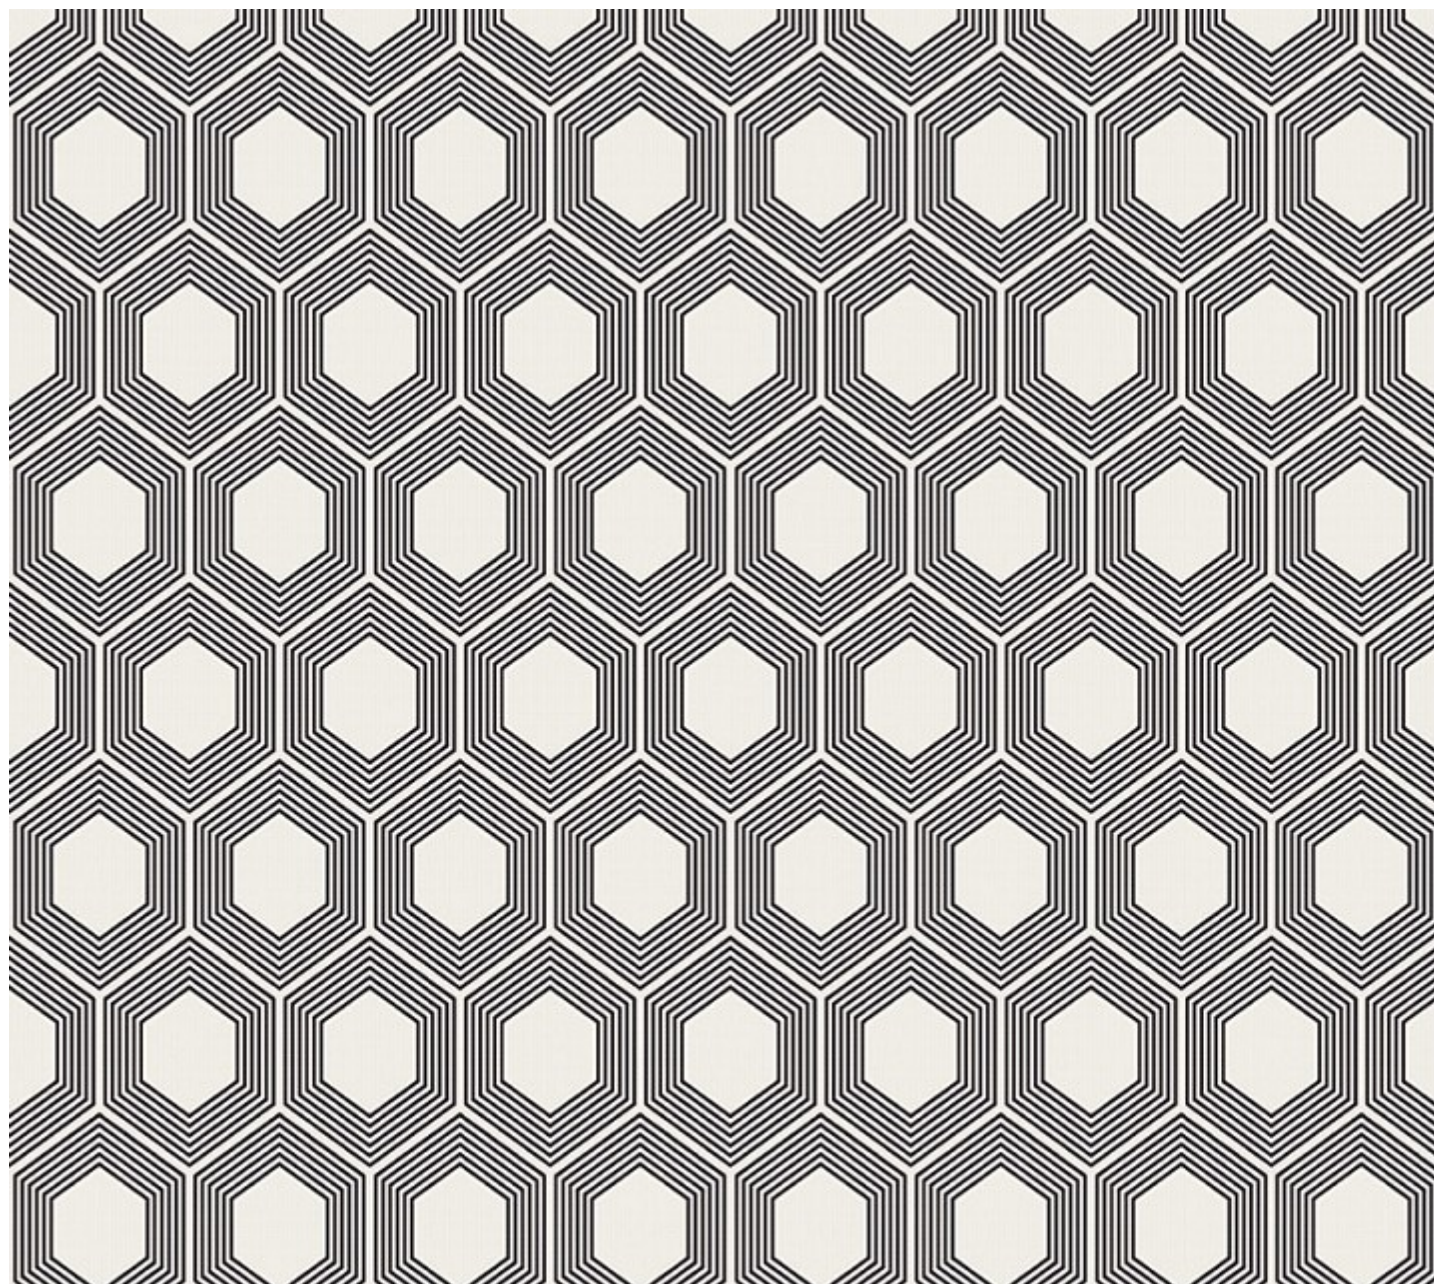

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 17.2 cm

REPEAT WARP REPETICIÓN URDIMBRE: 12 inches - 30.7 cm




MAJESTIC 02




MAJESTIC 06




MAJESTIC 40

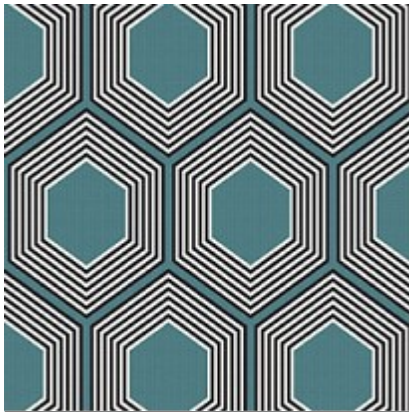

MAJESTIC 60

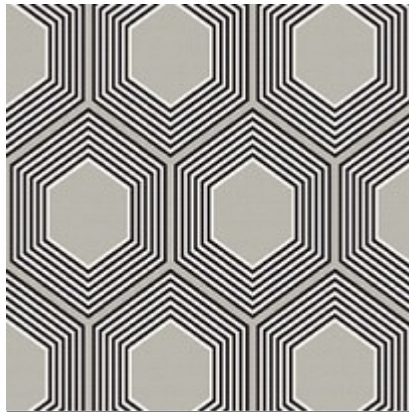


MAJESTIC 92

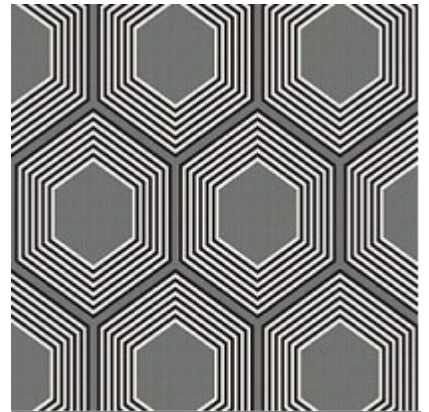

MAJESTIC 95

PACIFIC DESIGN

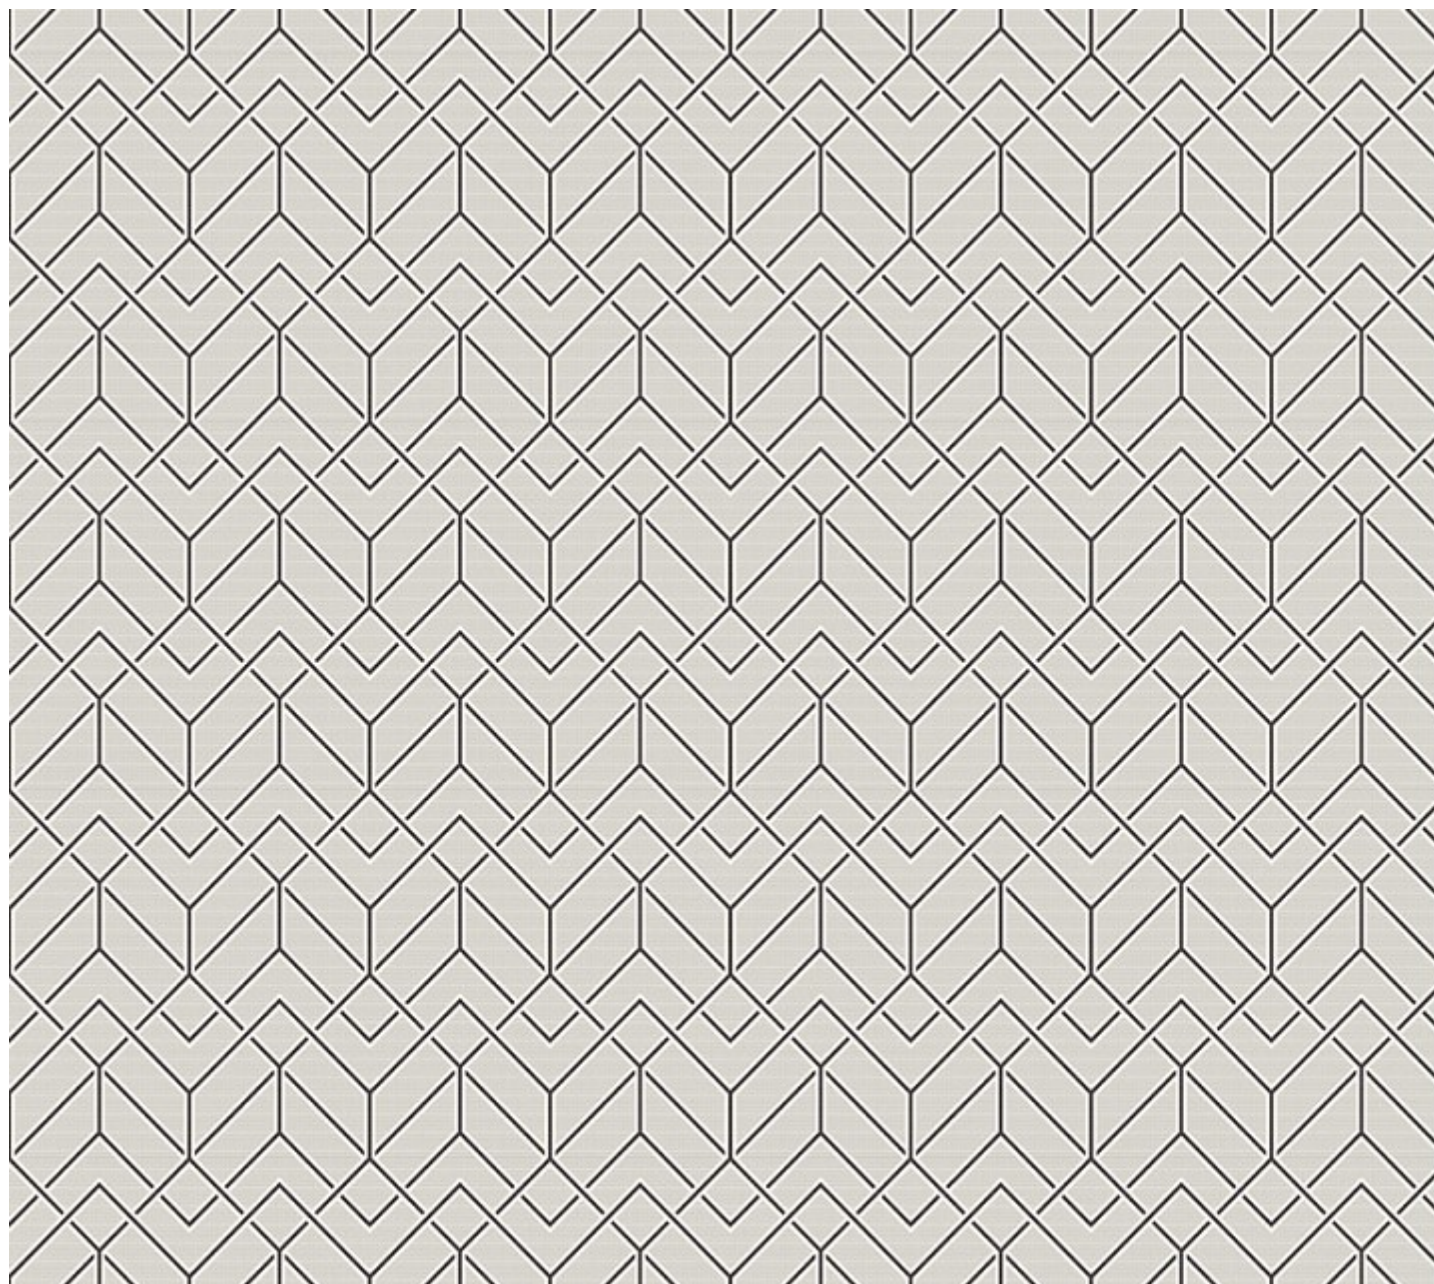

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 17.6 cm
REPEAT WARP REPETICIÓN URDIMBRE: 7 inches - 17.4 cm



PACIFIC 02




PACIFIC 06




PACIFIC 40



PACIFIC 60

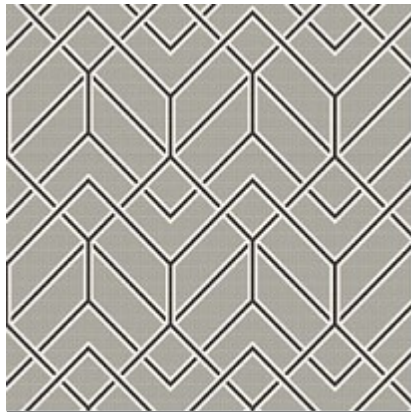

PACIFIC 92

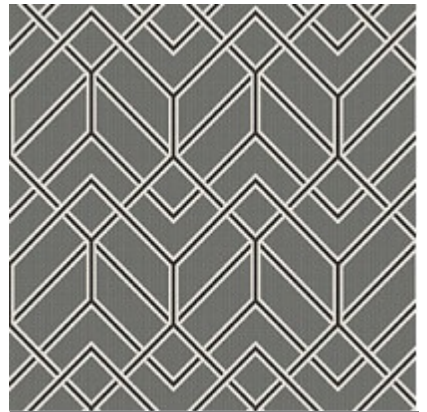

PACIFIC 95

LIBERTY COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	54075300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	9.12 / 310	
WEIGHT (oz/yd) / PESO (gr/ml)	27.99 / 868.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	18000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.5	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1470	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	1500	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	75	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	42	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	95	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	145	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	1.6	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.