


JUPITER LISO







LON.JUPITER DESIGN

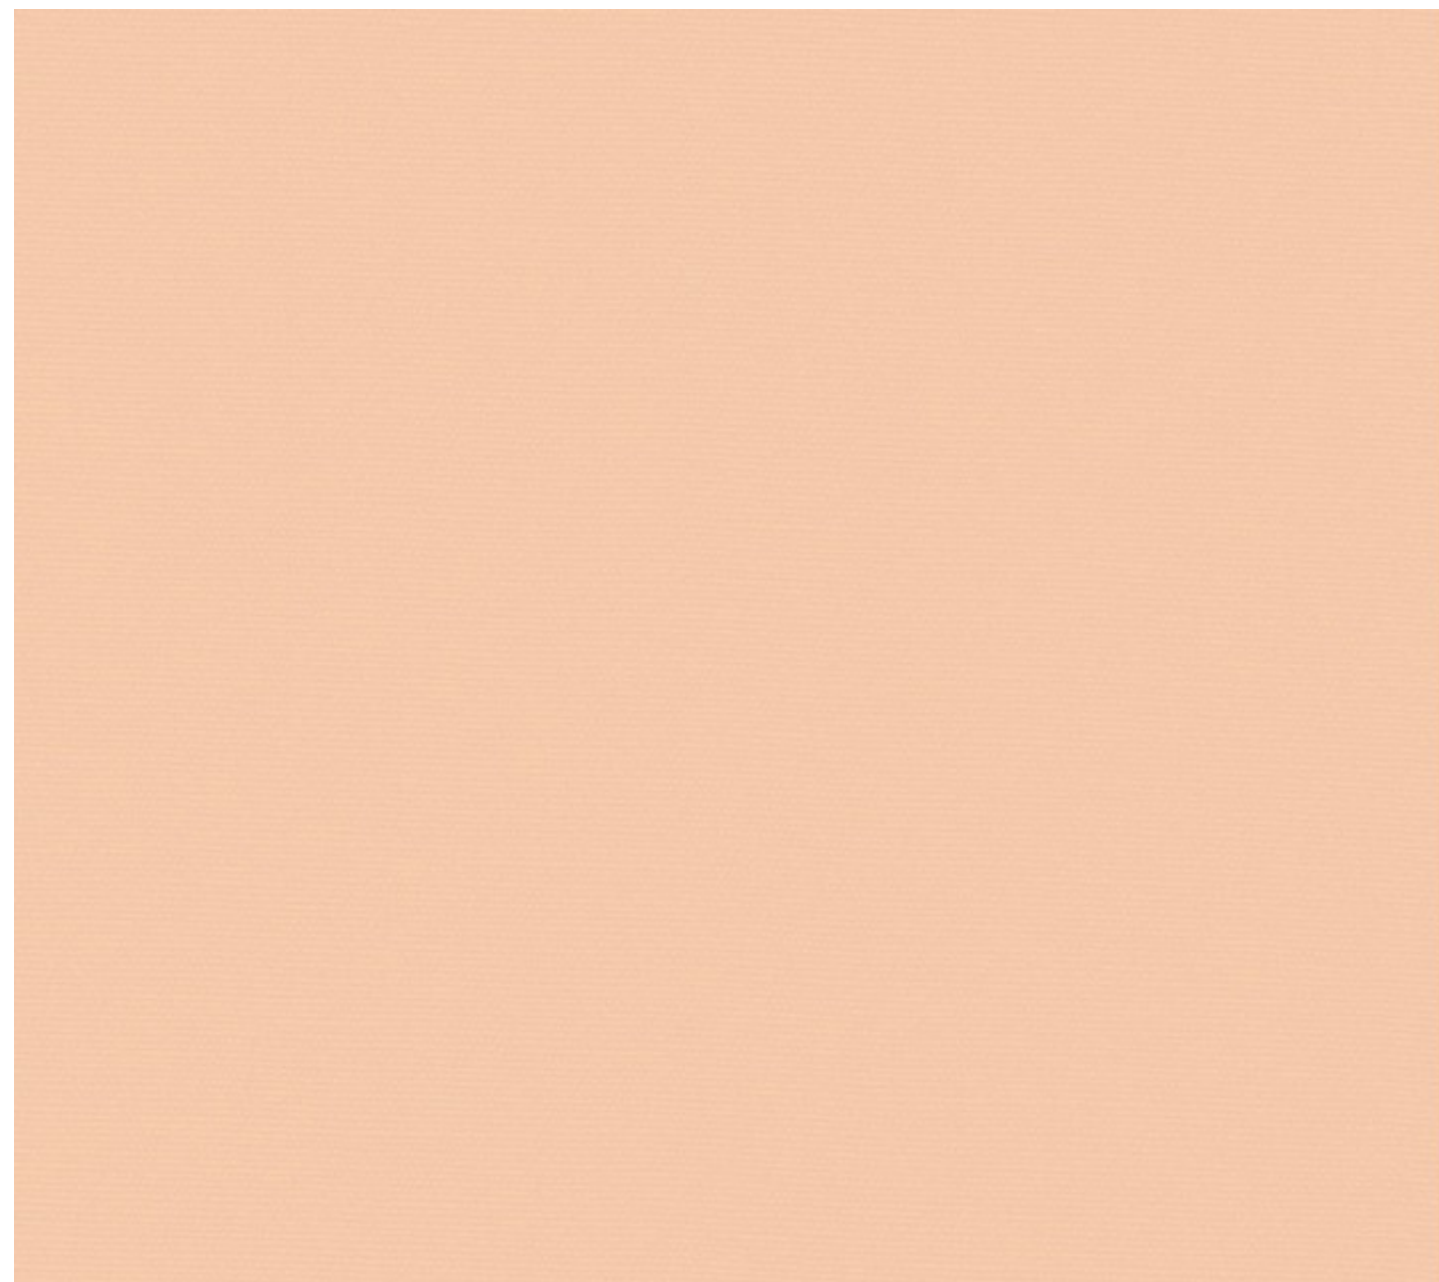


← 55 inch. simulation 140 cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: ----
REPEAT WARP REPETICIÓN URDIMBRE: ----



LON.JUPITER 00

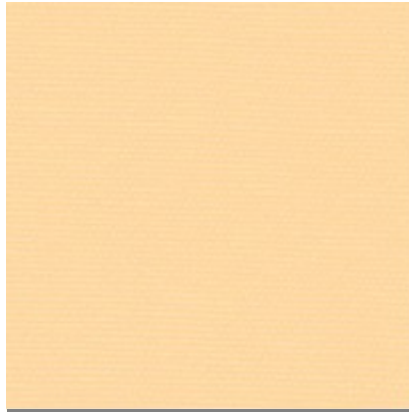

LON.JUPITER 02

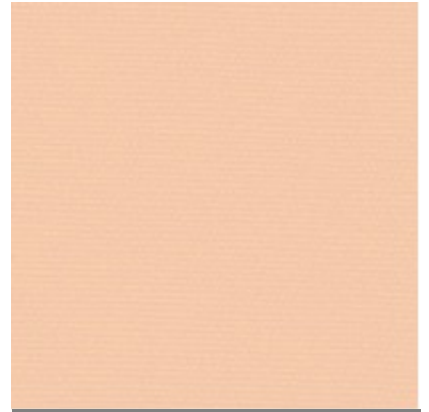


LON.JUPITER 11




LON.JUPITER 14



LON.JUPITER 15

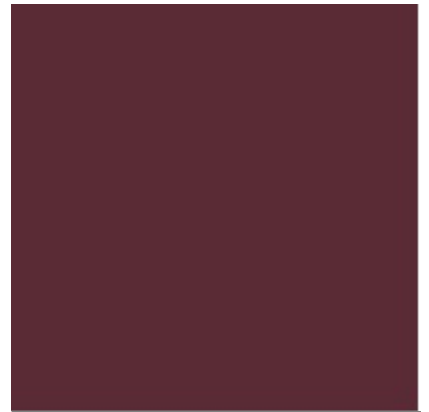

LON.JUPITER 19

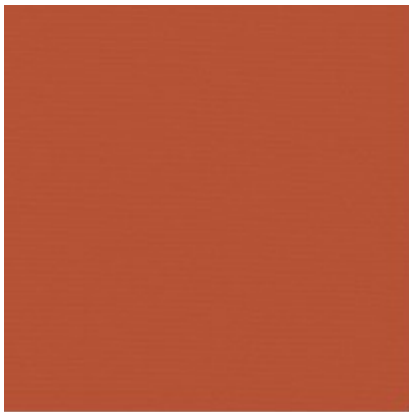

LON.JUPITER 36



LON.JUPITER 48




LON.JUPITER 51



LON.JUPITER 52



LON.JUPITER 54

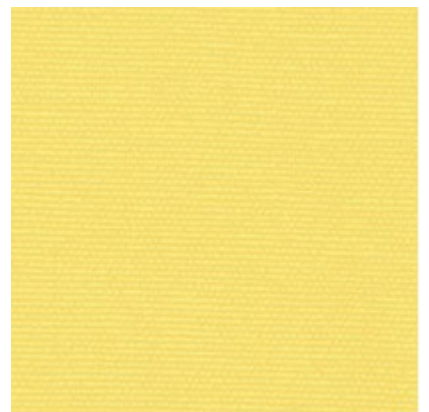

LON.JUPITER 56




LON.JUPITER 61




LON.JUPITER 65



LON.JUPITER 66

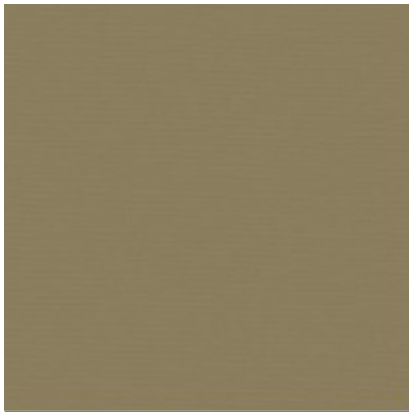


LON.JUPITER 82

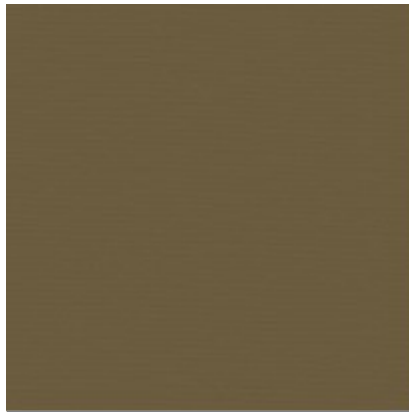


LON.JUPITER 86




LON.JUPITER 88

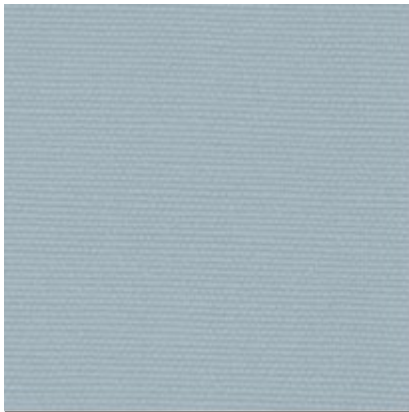


LON.JUPITER 92

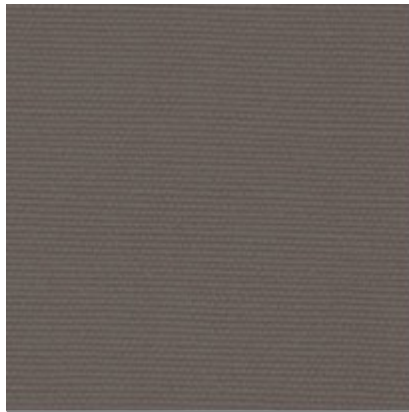

LON.JUPITER 98

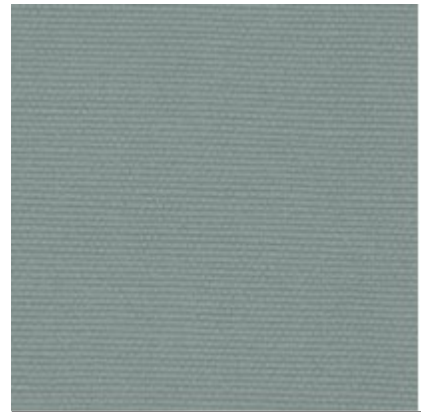

LON.JUPITER 99

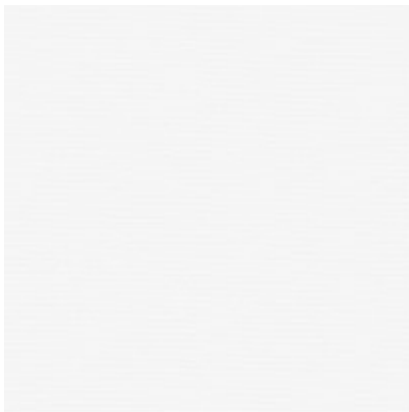

LON.JUPITER BCO



LON.JUPITER NEGRO

JUPITER LISO COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	52113100	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES65% CO35%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	6.03 / 205	
WEIGHT (oz/yd) / PESO (gr/ml)	18.51 / 574.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	25000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	3-4	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	3-4	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	4	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	3-4	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	4	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2	UNE EN ISO 5077
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	28.89	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	17.02	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2.65	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2.5	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.