



LONDON COLLECTION







ANDREWS DESIGN




55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 9 inches - 24 cm
REPEAT WARP REPETICIÓN URDIMBRE: 3 inches - 7 cm



ANDREWS 15

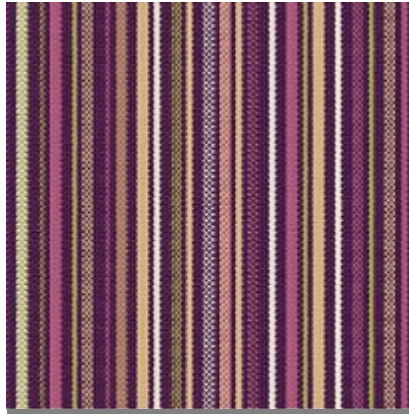

ANDREWS 25



ANDREWS 54



ANDREWS 56




ANDREWS 65




ANDREWS 80

ELGIN DESIGN

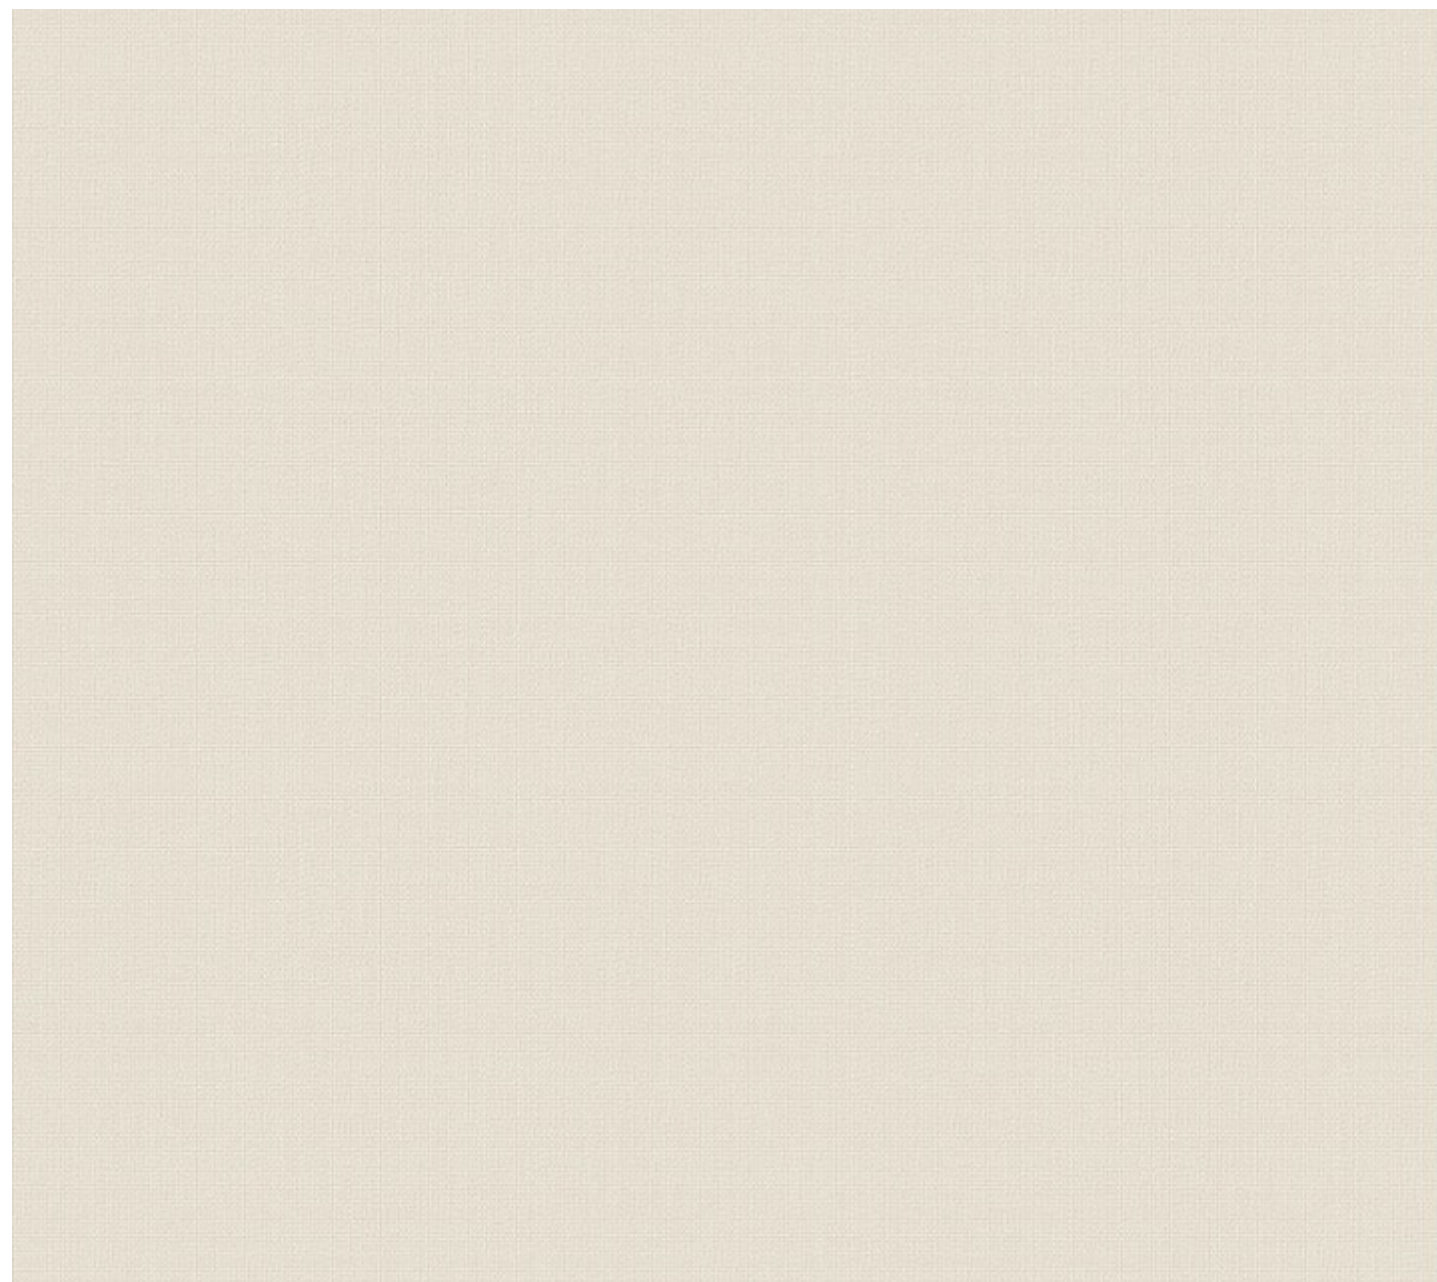


← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 10 inches - 25.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 11 inches - 29 cm

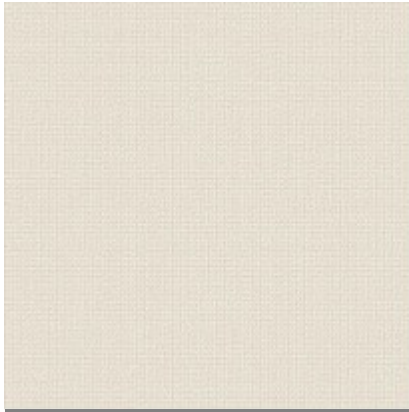


ELGIN 02

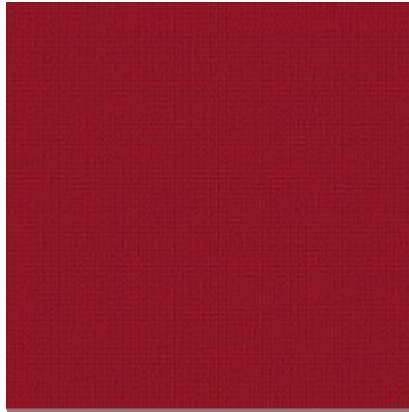


ELGIN 15




ELGIN 25

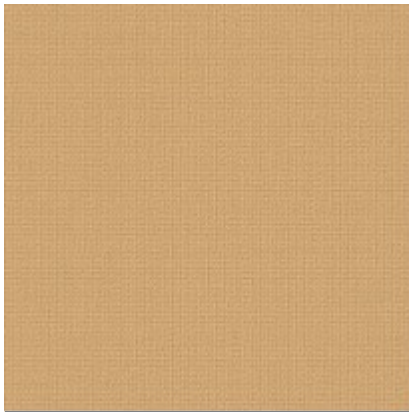


ELGIN 40

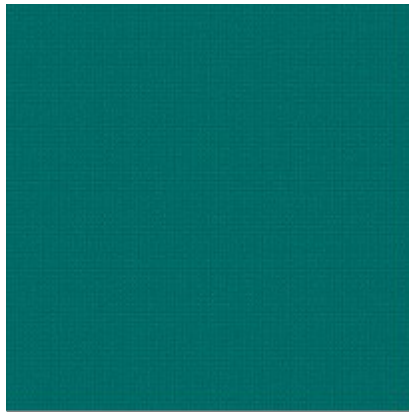

ELGIN 54

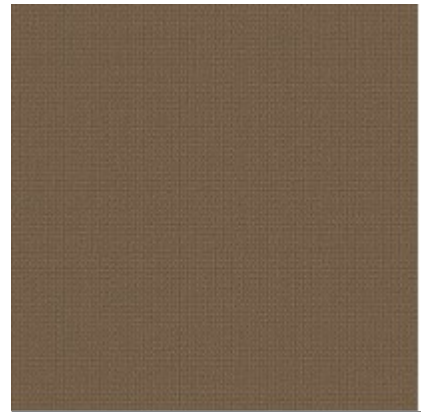

ELGIN 80

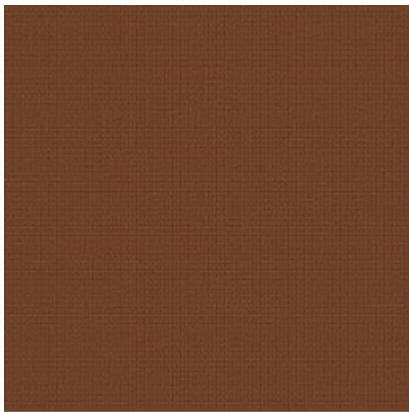

ELGIN 85

HAMILTON DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 5 inches - 12 cm
REPEAT WARP REPETICIÓN URDIMBRE: 6 inches - 14 cm



HAMILTON 15



HAMILTON 25



HAMILTON 54



HAMILTON 56




HAMILTON 65



HAMILTON 80

KELSO DESIGN

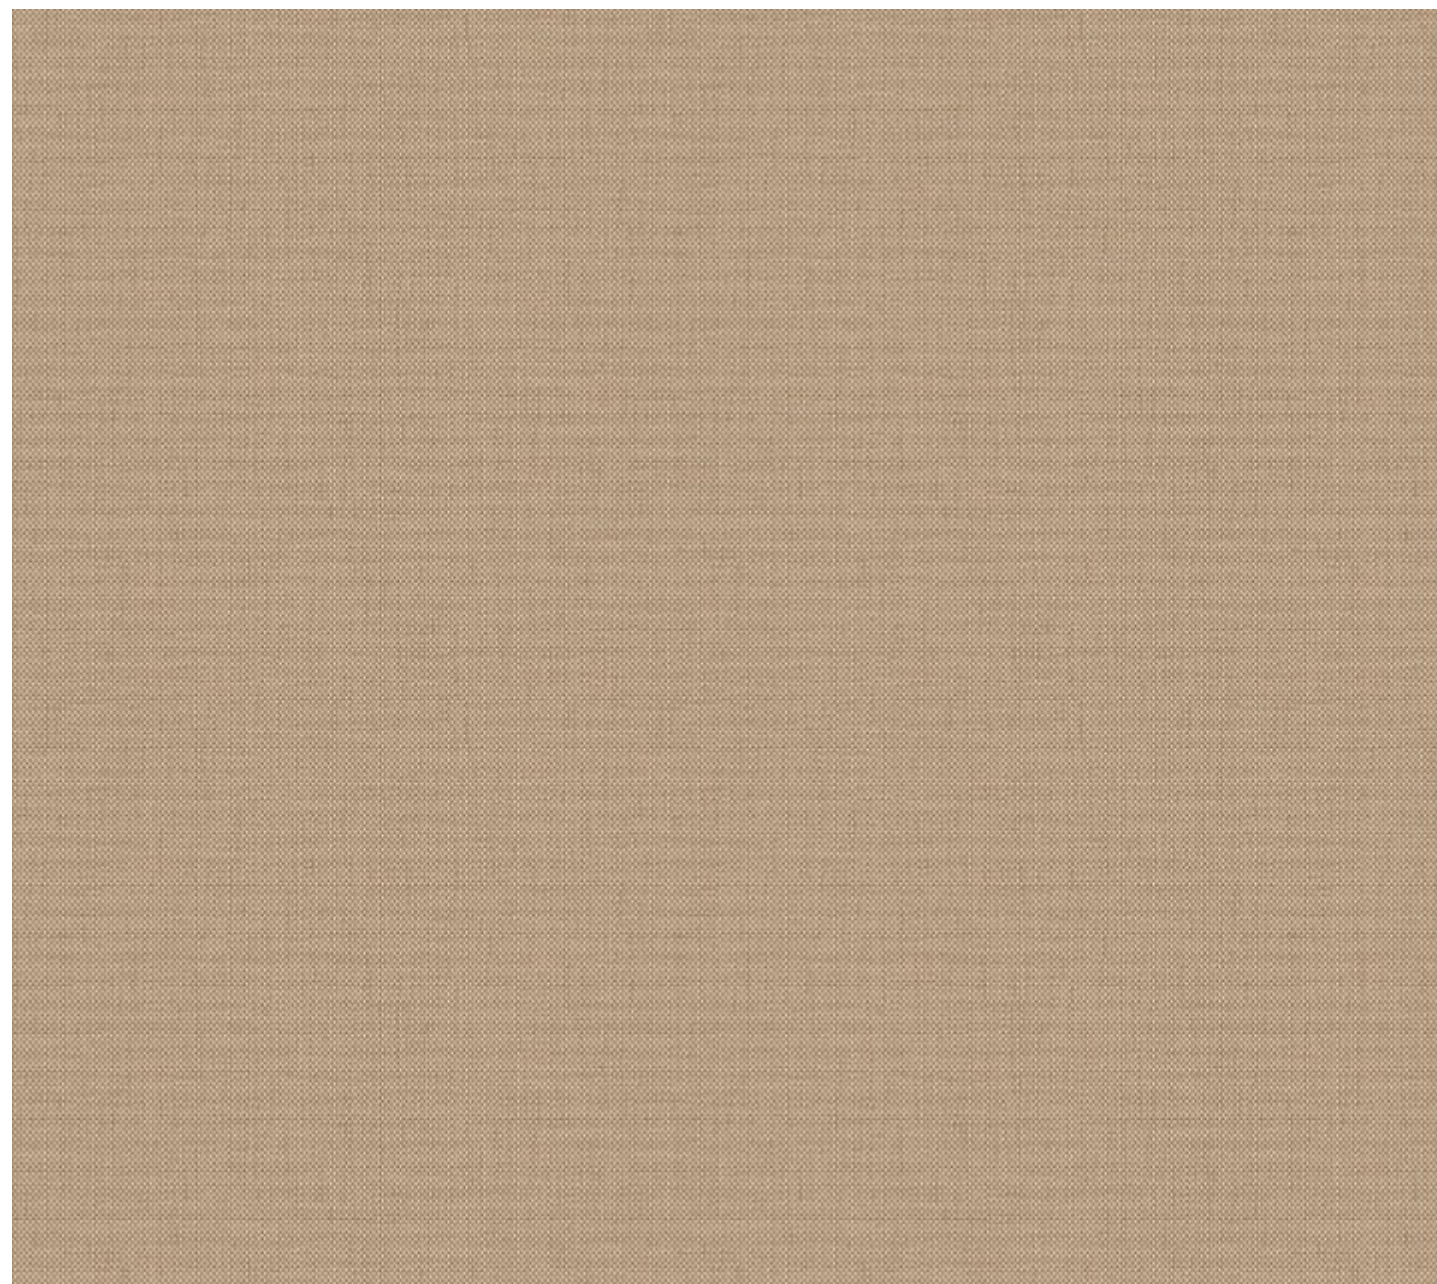


← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 10 inches - 25.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 11 inches - 29 cm




KELSO 08

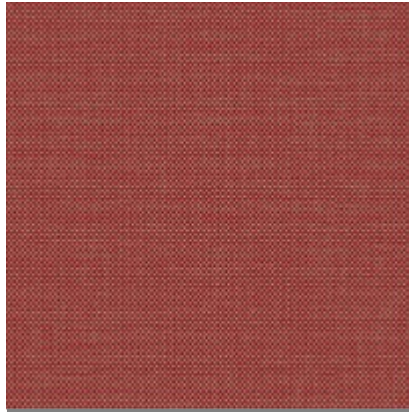

KELSO 12



KELSO 15

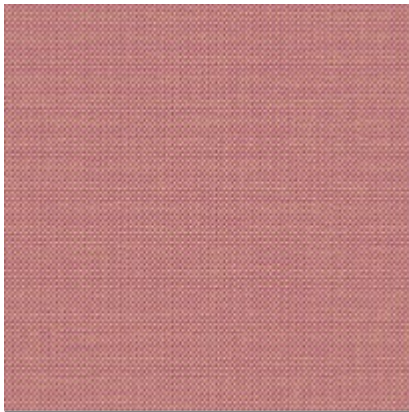

KELSO 22



KELSO 25



KELSO 40



KELSO 42




KELSO 52



KELSO 54




KELSO 56

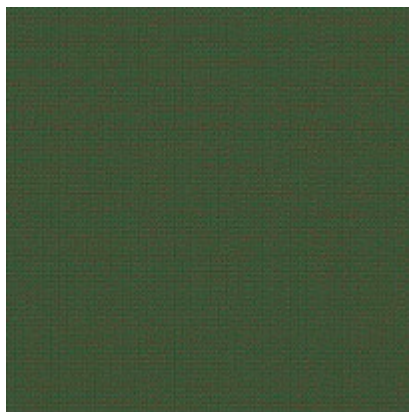

KELSO 58



KELSO 62

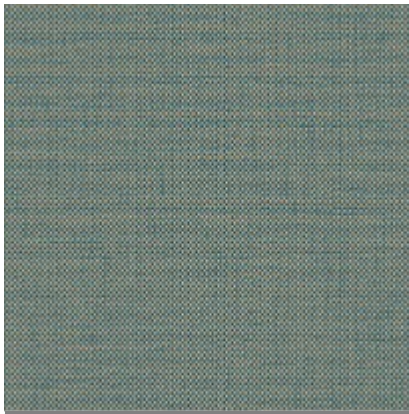


KELSO 65



KELSO 80



KELSO 85

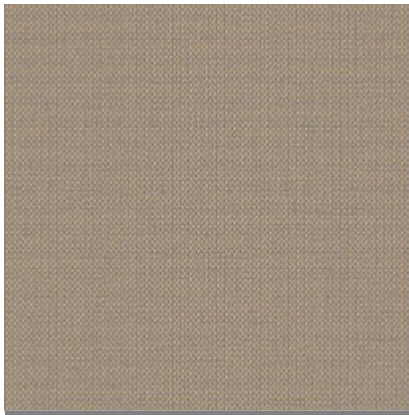

KELSO 90

KILLIN DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 10 inches - 25.5 cm

REPEAT WARP REPETICIÓN URDIMBRE: 2 inches - 6 cm



KILLIN 15



KILLIN 25



KILLIN 54



KILLIN 56



KILLIN 65



KILLIN 80

LONDON DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 10 inches - 25.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 13 inches - 31.5 cm



LONDON 15



LONDON 25



LONDON 54



LONDON 56



LONDON 65



LONDON 80

LONDON COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 - 55 / 280 - 140	
H S CODE / PARTIDA ARANCELARIA	58013600	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5 / 25	
COMPOSITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	6.77 / 230	
WEIGHT (oz/yd) / PESO (gr/ml)	2.06 - 1.03 / 64.00 - 32.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	40000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	969.62	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	531.88	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	36	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	38.3	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	65.2	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	27.75	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.