



MILTON COLLECTION







BAMPTON DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 55 inches - 139 cm
REPEAT WARP REPETICIÓN URDIMBRE: 25 inches - 63.5 cm



BAMPTON 15



BAMPTON 35



BAMPTON 55

BUXTON DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 28 inches - 70 cm
REPEAT WARP REPETICIÓN URDIMBRE: 25 inches - 63 cm



BUXTON 15



BUXTON 35



BUXTON 55


ERIN DESIGN




← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 9 inches - 23.5 cm


REPEAT WARP REPETICIÓN URDIMBRE: ...

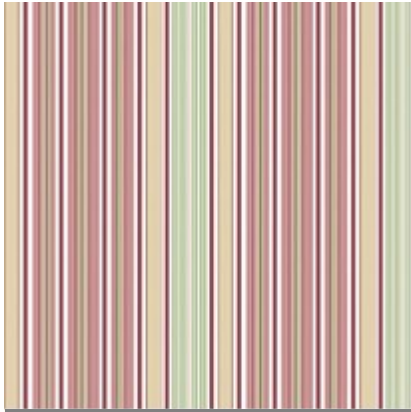

ERIN 15

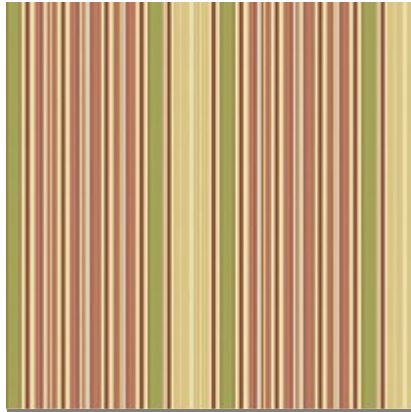


ERIN 35

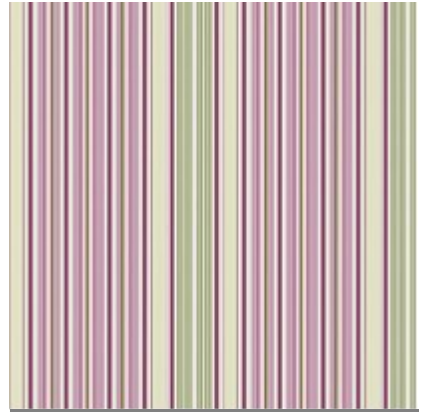


ERIN 55

LIVERPOOL DESIGN

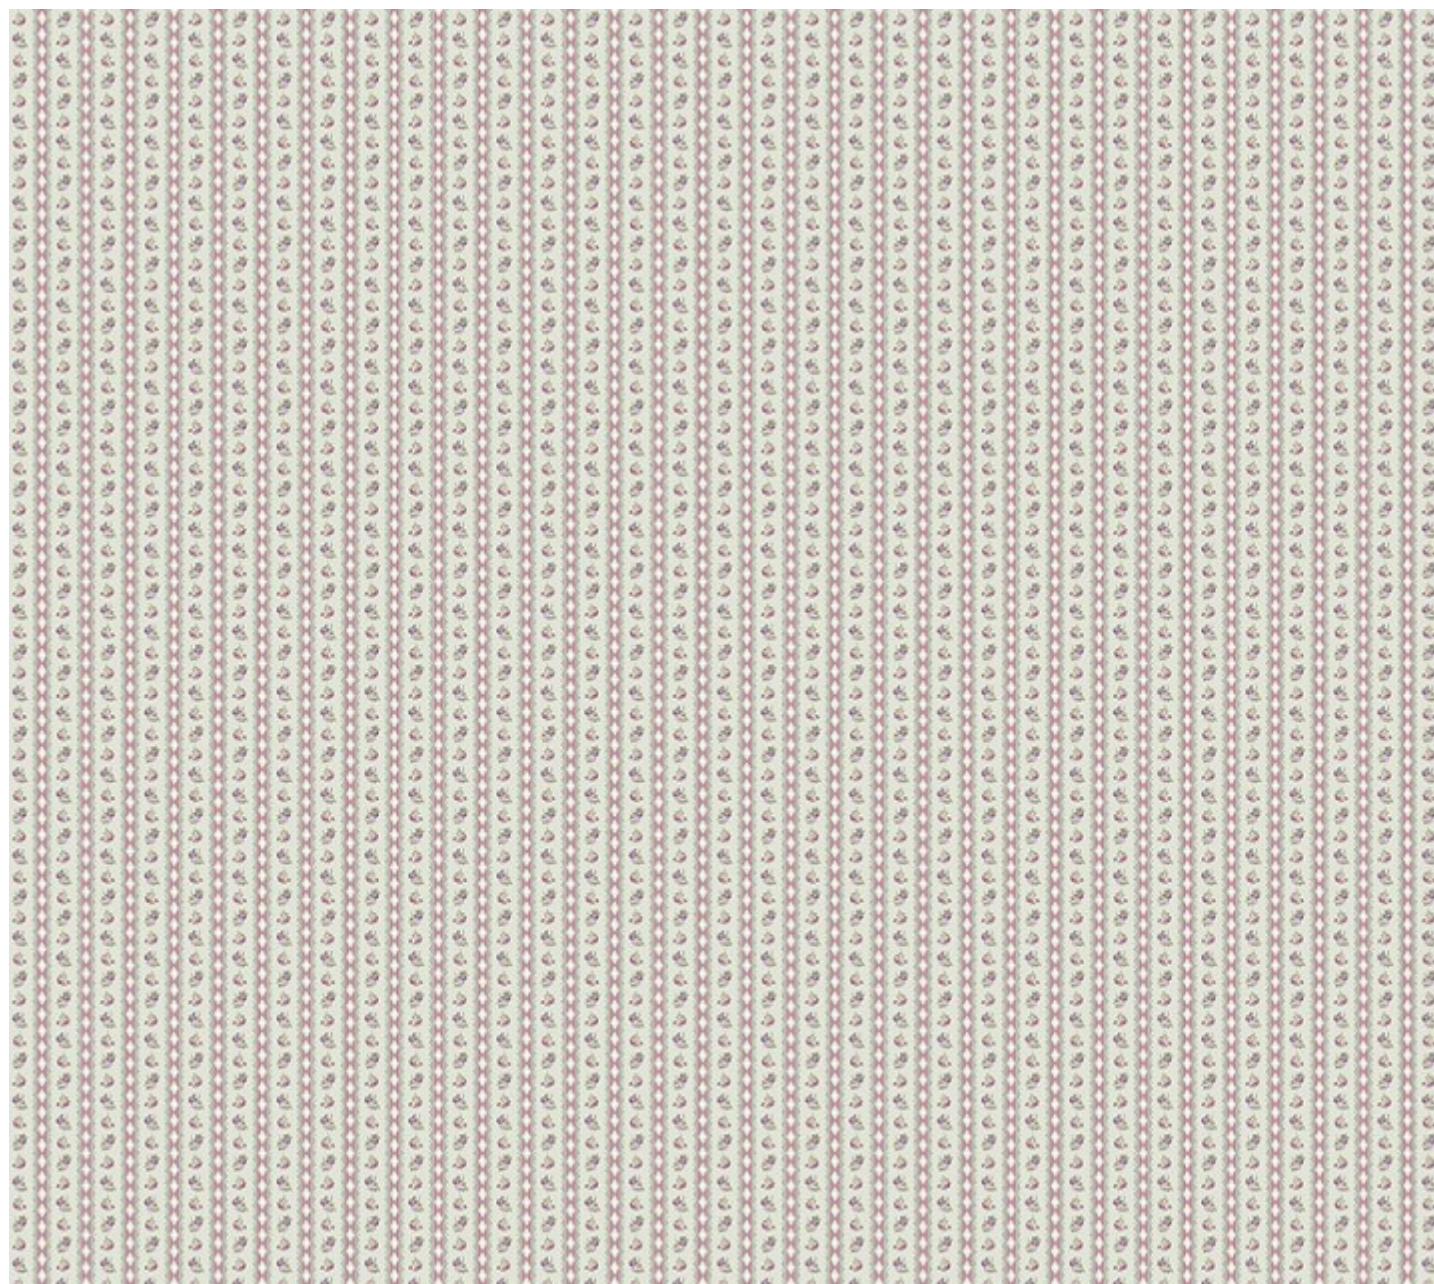


55 inch. simulation
140 cm. simulación


REPEAT WEFT REPETICIÓN TRAMA: 3 inches - 8 cm
REPEAT WARP REPETICIÓN URDIMBRE: 3 inches - 8 cm

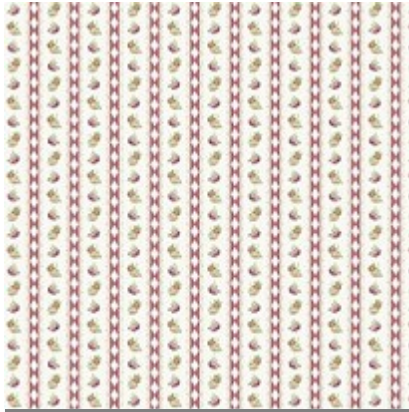

LIVERPOOL 15

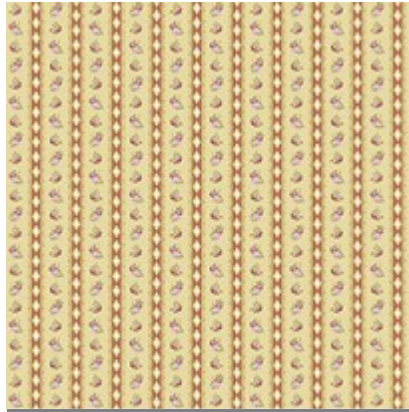


LIVERPOOL 35

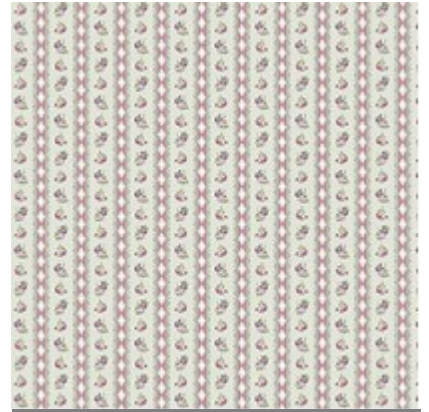

LIVERPOOL 55

MANCHESTER DESIGN

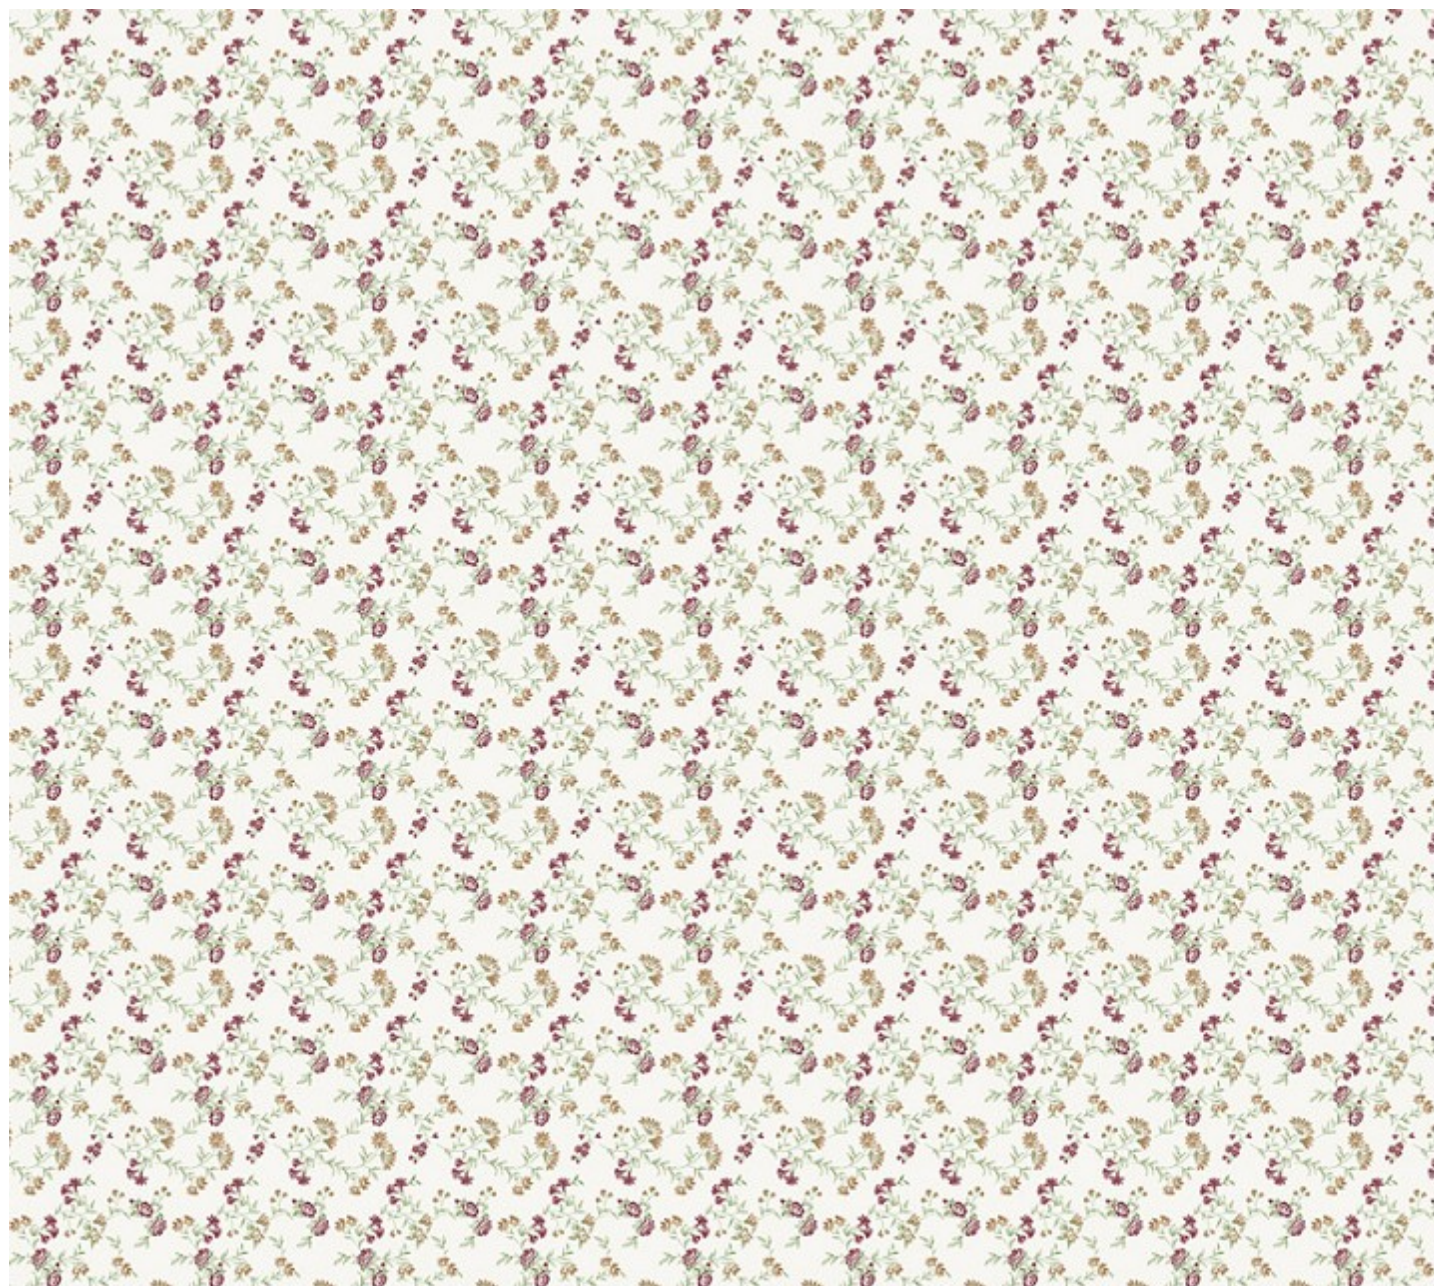

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 6 inches - 16 cm
REPEAT WARP REPETICIÓN URDIMBRE: 6 inches - 15.5 cm



MANCHESTER 15



MANCHESTER 35



MANCHESTER 55

MILTON DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 28 inches - 70 cm
REPEAT WARP REPETICIÓN URDIMBRE: 25 inches - 62.5 cm



MILTON 15



MILTON 35



MILTON 55

MILTON COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	52115100	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	CO60% PE S40%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	7.51 / 255	
WEIGHT (oz/yd) / PESO (gr/ml)	23.03 / 714.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	>40000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	4	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	4	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	4	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2.5	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	4	UNE EN ISO 5077
WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	583.65	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	16.64	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	>150	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	54.21	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	2.8	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2.3	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1
WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	318.1	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	59.08	UNE EN ISO 13934-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.