




NATUDARK COLLECTION







NATUDARK FR DESIGN

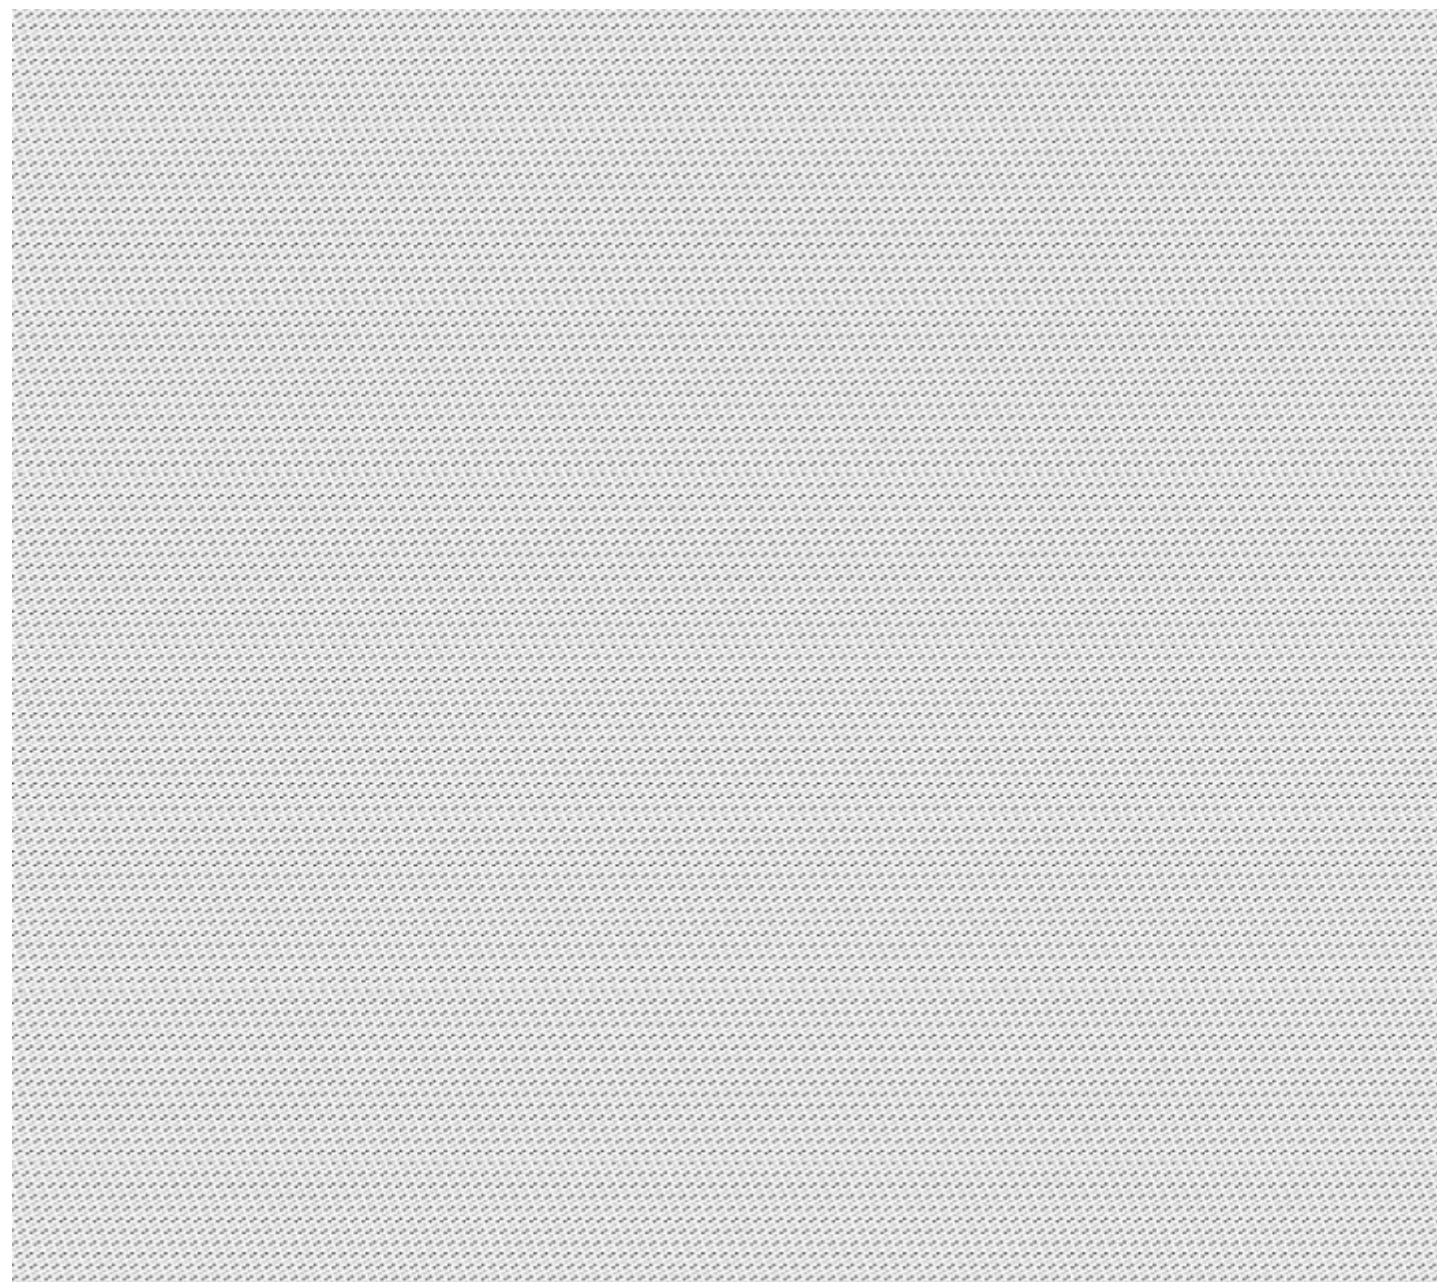

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:



NATUDARK FR 03



NATUDARK FR 08



NATUDARK FR 15




NATUDARK FR 35



NATUDARK FR 45



NATUDARK FR 50

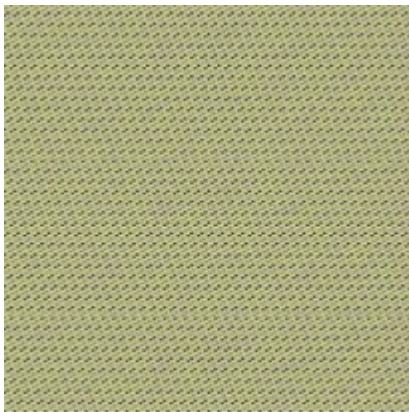

NATUDARK FR 52



NATUDARK FR 57



NATUDARK FR 62



NATUDARK FR 64



NATUDARK FR 67



NATUDARK FR 88



NATUDARK FR 95



NATUDARK FR NAT

NATUDARK COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	122 / 310	
H S CODE / PARTIDA ARANCELARIA	54075200	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	22.0 / 20	
COMPO SITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	12.07 / 410	
WEIGHT (oz/yd) / PESO (gr/ml)	40.99 / 1271.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1.2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.4	UNE EN ISO 5077
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	3	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	4.9	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C-1	UNE EN 13773:2003
OPACITY 100000 LUX / OPACIDAD 100000 LUX	0-0.3	CS1451LUX

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.