



VERDI COLLECTION







CONCORDIA DESIGN




← 55 inch. simulation 140 cm. simulación →


REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.2 cm
REPEAT WARP REPETICIÓN URDIMBRE: 14 inches - 36 cm




CONCORDIA 02

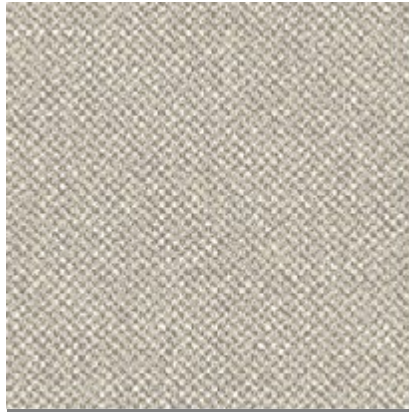


CONCORDIA 06

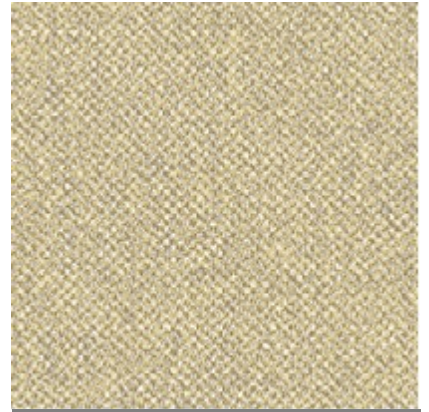


CONCORDIA 42

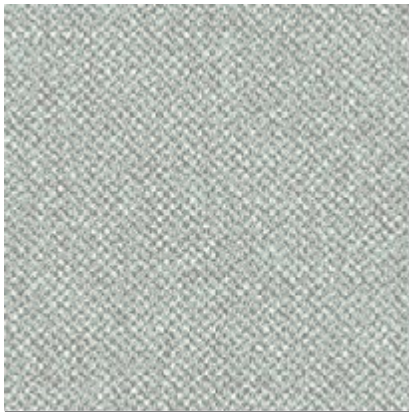

CONCORDIA 54

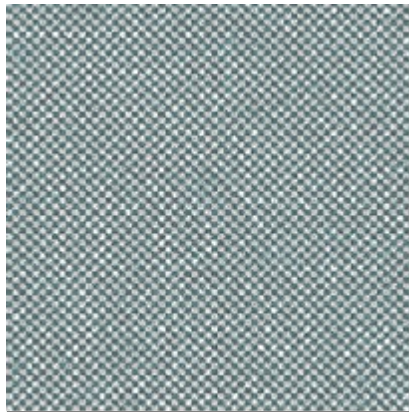


CONCORDIA 62

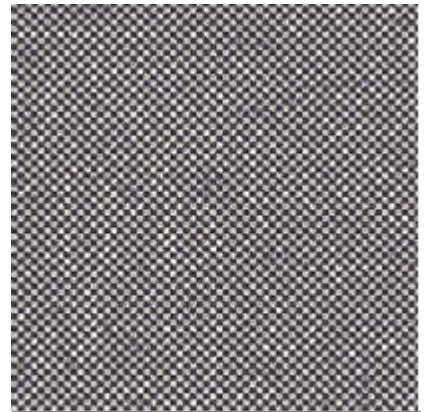

CONCORDIA 98

MANZONI DESIGN

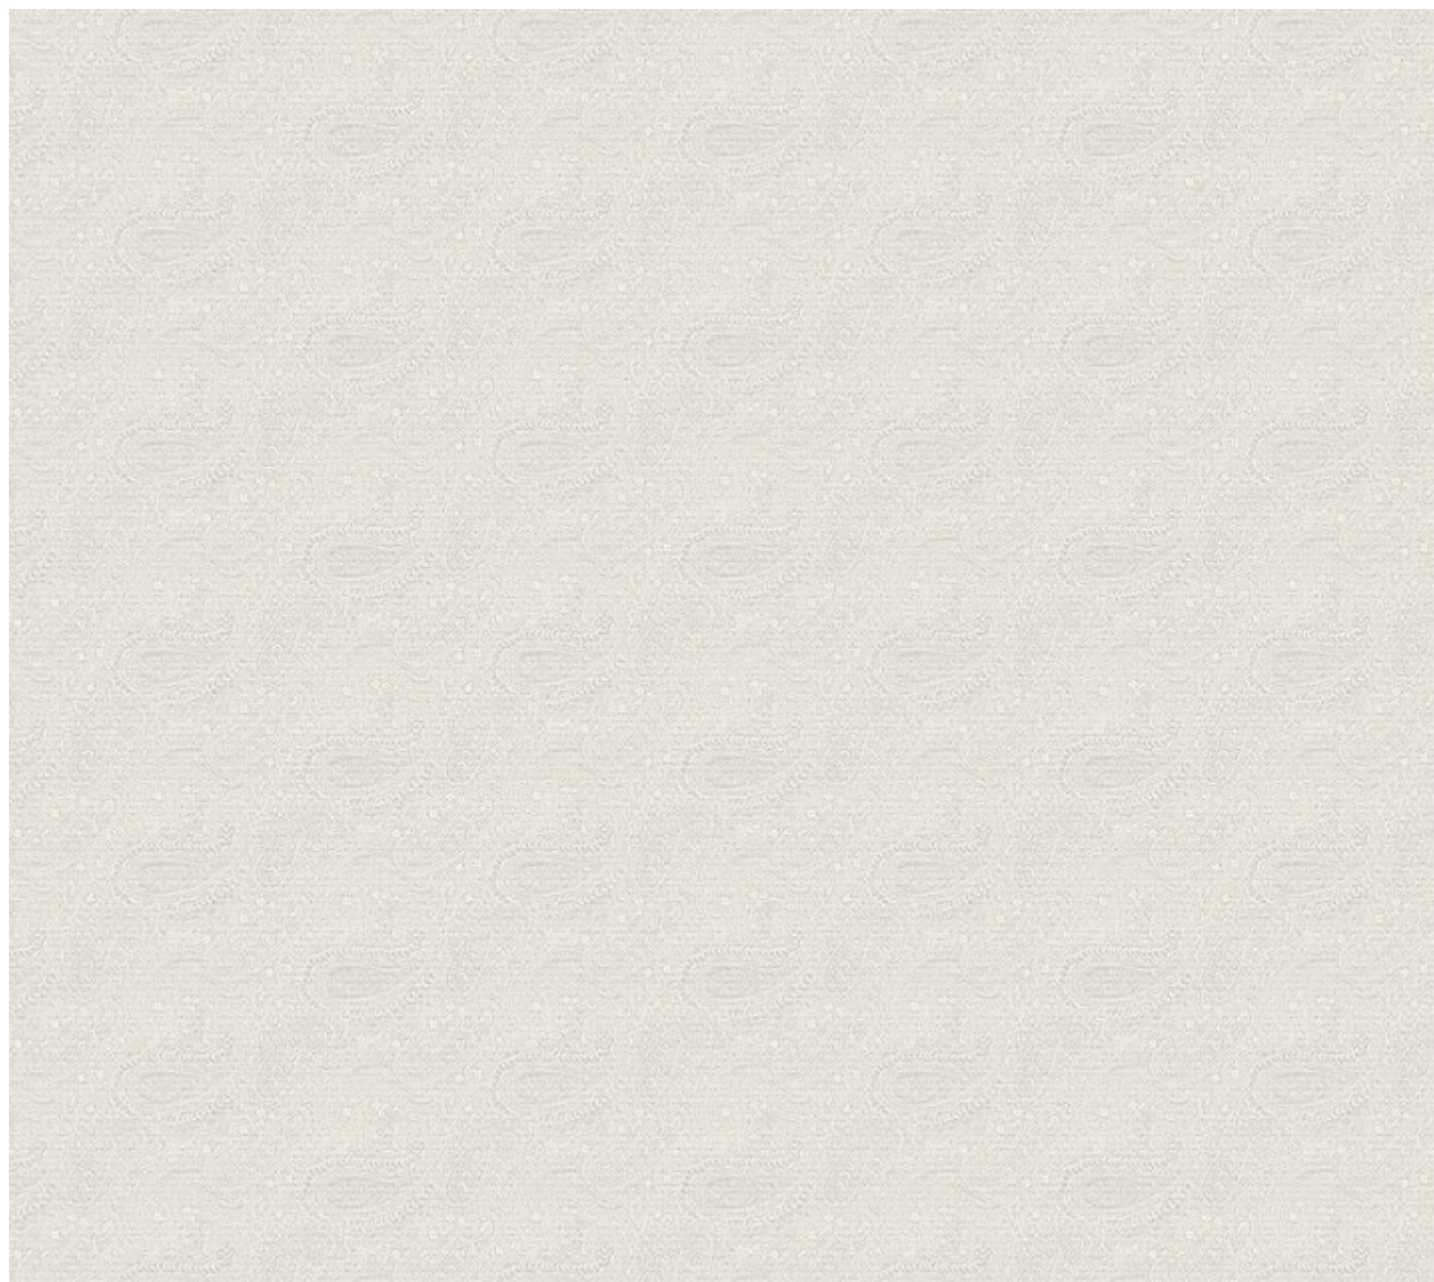

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 8 inches - 20.2 cm




MANZONI 02




MANZONI 06



MANZONI 42

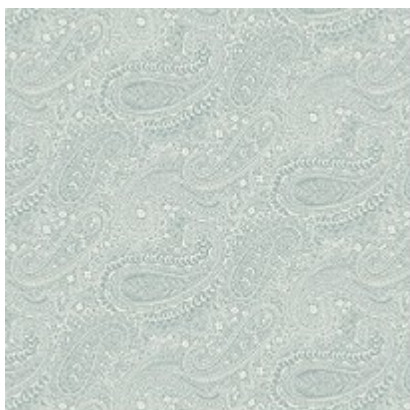

MANZONI 54

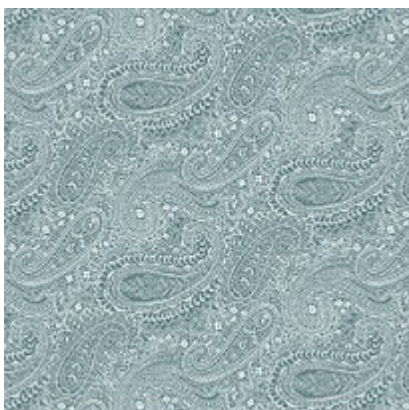


MANZONI 62



MANZONI 98

MASSIMO DESIGN

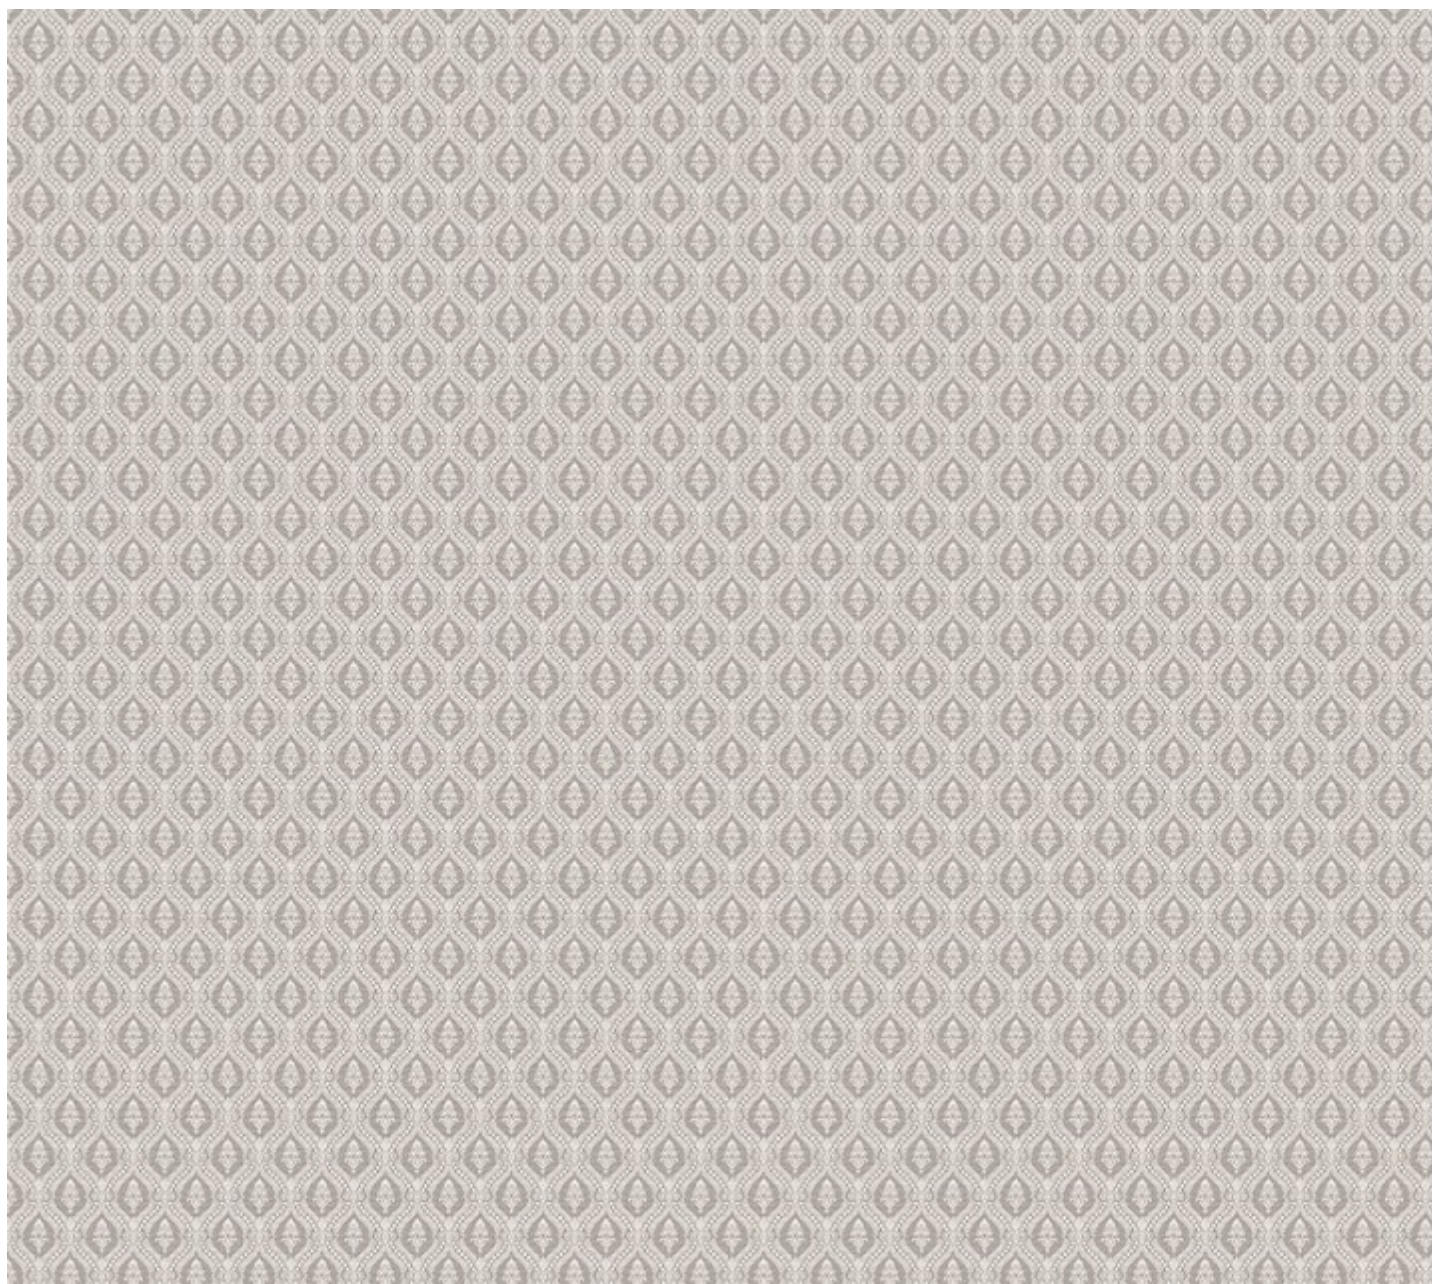

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 2 inches - 6 cm
REPEAT WARP REPETICIÓN URDIMBRE: 3 inches - 8 cm



MASSIMO 02



MASSIMO 06



MASSIMO 42



MASSIMO 54




MASSIMO 62



MASSIMO 98

PICCOLO DESIGN

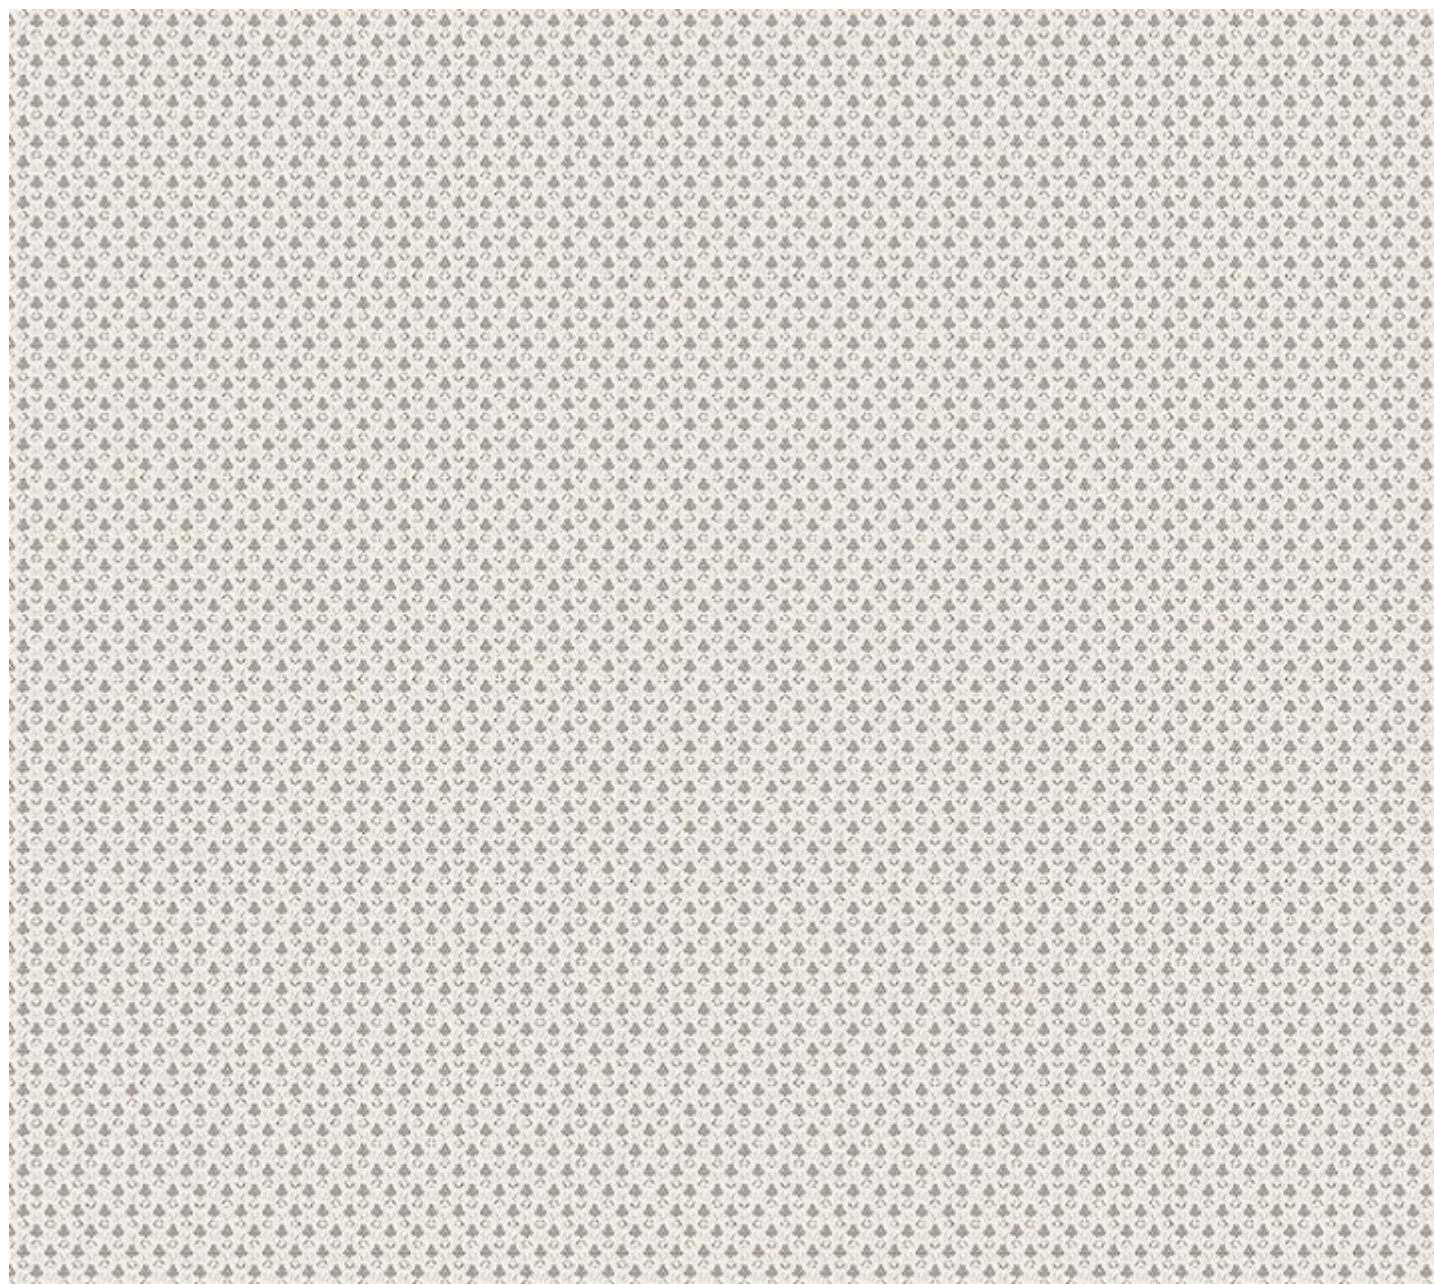

55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 1 inches - 1.7 cm
REPEAT WARP REPETICIÓN URDIMBRE: 1 inches - 2.7 cm



PICCOLO 02




PICCOLO 06




PICCOLO 42



PICCOLO 54

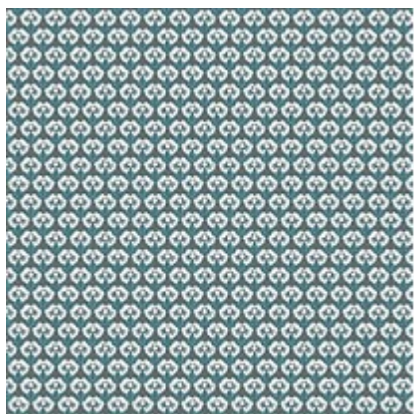

PICCOLO 62

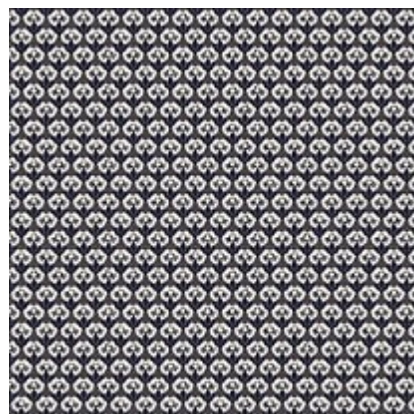

PICCOLO 98

VERDI DESIGN



55 inch. simulation
140 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 34.5 cm
REPEAT WARP REPETICIÓN URDIMBRE: 23 inches - 58.7 cm



VERDI 02



VERDI 06



VERDI 42



VERDI 54



VERDI 62



VERDI 98

VERDI COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
H S CODE / PARTIDA ARANCELARIA	54078300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES50% PAN25% CO25%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	8.24 / 280	
WEIGHT (oz/yd) / PESO (gr/ml)	25.28 / 784.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	30000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	3	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	1.6	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	918.03	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	1174.26	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	78.15	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	32.60	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	49	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	78	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1.9	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	2.1	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.