




AERIS COLLECTION







AERIS DESIGN

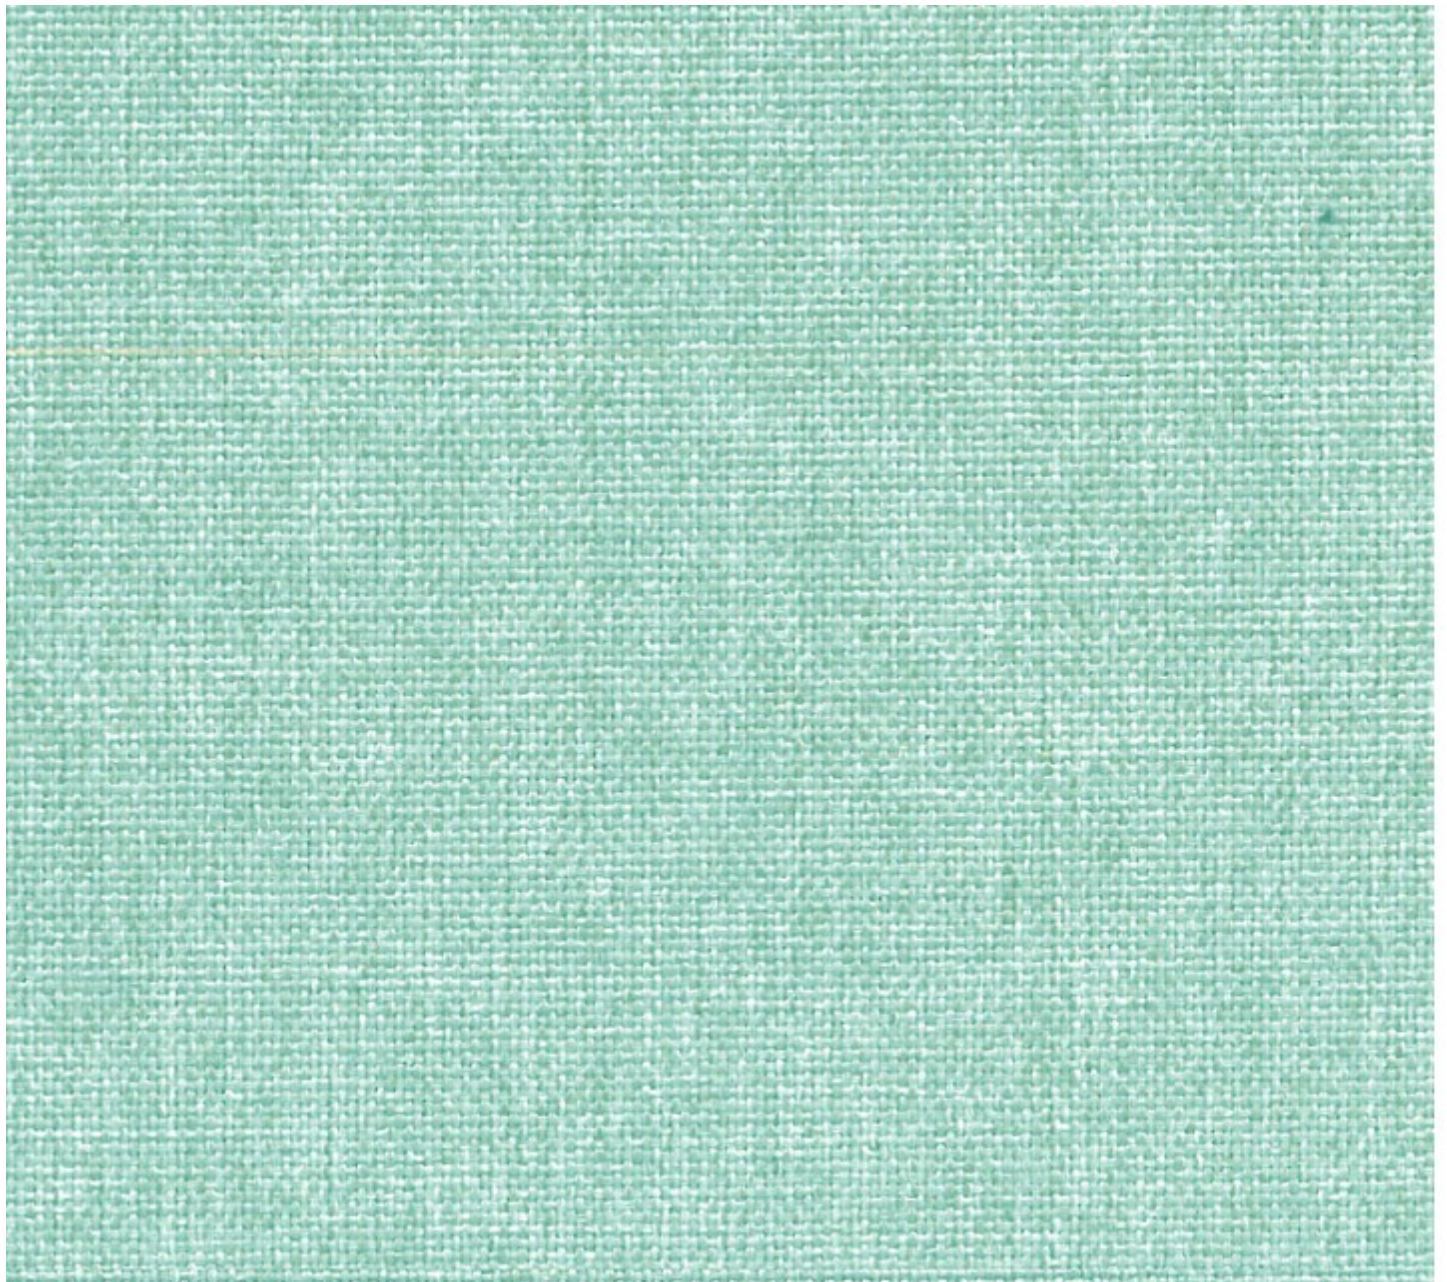

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:



AERIS 02



AERIS 03



AERIS 06



AERIS 08



AERIS 15



AERIS 35




AERIS 45



AERIS 50



AERIS 52

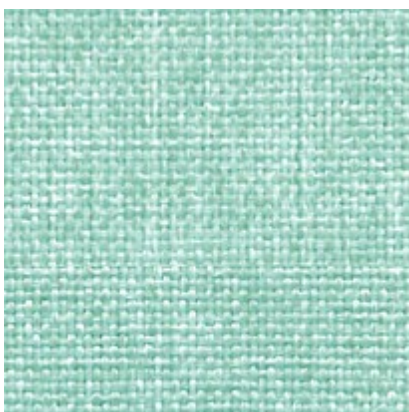

AERIS 62




AERIS 64




AERIS 67




AERIS 72

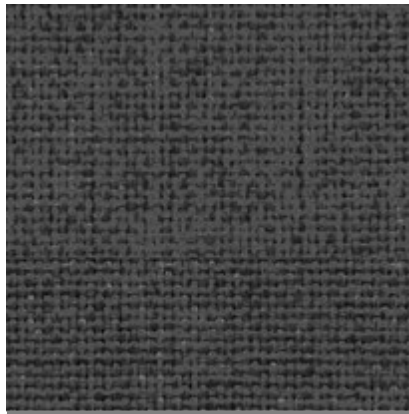

AERIS 88

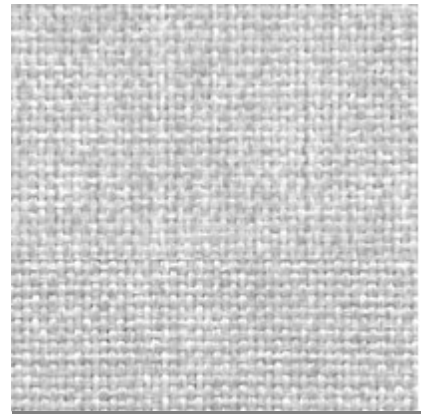

AERIS 95

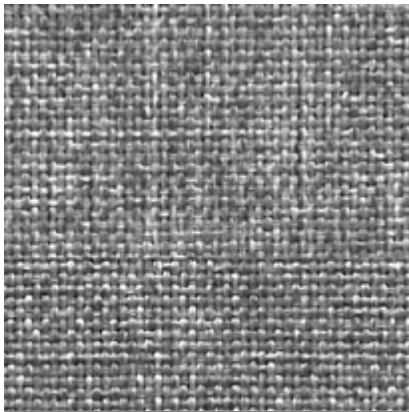

AERIS 97



AERIS LIN



AERIS NAT

AERIS COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	118 / 300	
H S CODE / PARTIDA ARANCELARIA	55121990	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5 / 25	
COMPOSITION / COMPOSICION	PES 100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	8.68 / 295	
WEIGHT (oz/yd) / PESO (gr/ml)	28.54 / 885.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	>80000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2.2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1274.06	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	749.04	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	79	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	63.1	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	>200	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	165.3	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1.5	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	1.9	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.