




VIGORE COLLECTION








VIGORE DESIGN

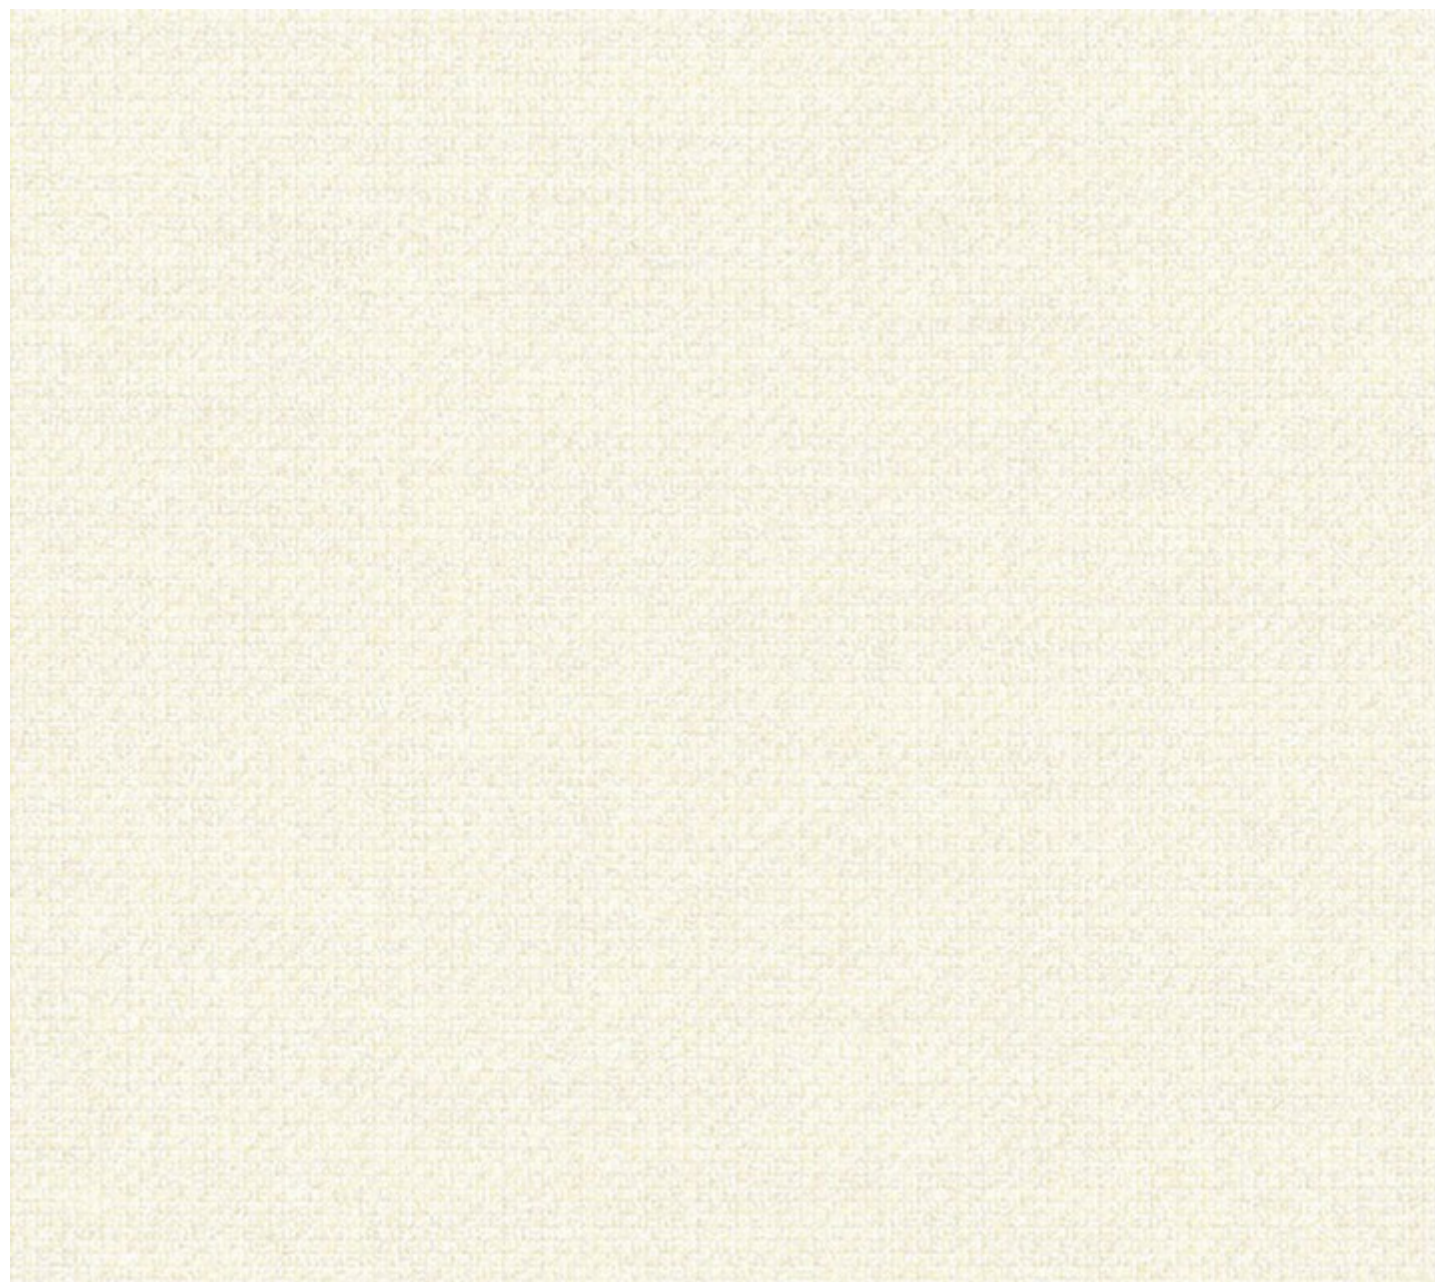

← 55 inch. simulation 140 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: ----
REPEAT WARP REPETICIÓN URDIMBRE: ----

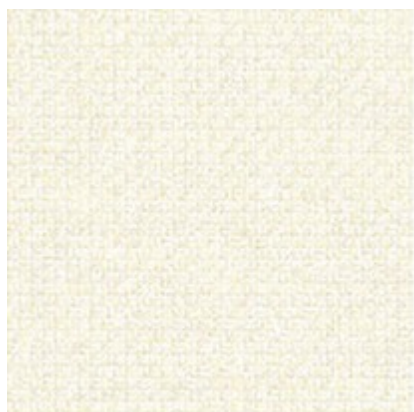

VIGORE 01



VIGORE 04




VIGORE 05




VIGORE 06



VIGORE 08

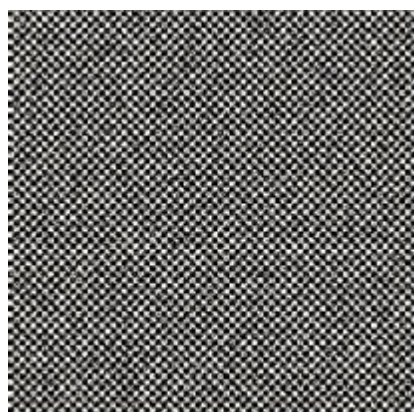

VIGORE 30

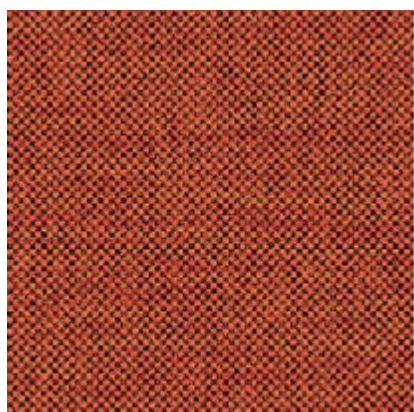

VIGORE 35



VIGORE 54




VIGORE 55



VIGORE 60



VIGORE 61

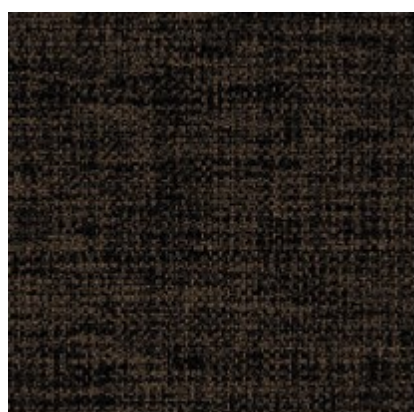

VIGORE 88

VIGORE COLLECTION

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	59 / 150	
H S CODE / PARTIDA ARANCELARIA	54072011	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	38.5 / 35	
COMPOSITION / COMPOSICION	PP100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+5%)	7.80 / 265	
WEIGHT (oz/yd) / PESO (gr/ml)	12.82 / 397.50	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN	>40000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ	7	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2.2	UNE EN ISO 5077
WARP TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN	1153.9	UNE EN ISO 13934-1
WEFT TEN SILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA	1183.86	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	90.43	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA	85.77	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO	125.11	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	116.5	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA	1.4	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA	1.8	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1

CARE CONDITIONS

Condiciones e indicaciones de lavado



RECOMMENDED USES

Usos y aplicaciones recomendadas



SPECIAL FEATURES

Características especiales





www.comersan.com (global) | **www.comersanfabrics.com** (USA)

COMERSAN, S.A. is absolute owner of the trademarks, pictures and drawings being used. Their reproduction and/or transformation are completely forbidden without the company's express authorisation.